

ISO & TEC & RAINBOW LED Downlights

IP65 Waterproof



TEC



Tilt 30°

ISO



RAINBOW



Reflector color: White/Black/Silver/Golden/Mirror



Go to page 07

MINI SURFACE LAMP



Contents


COMPANY PROFILE

P001-P002

PRODUCTS

P003-026

LED TRACKLIGHTS

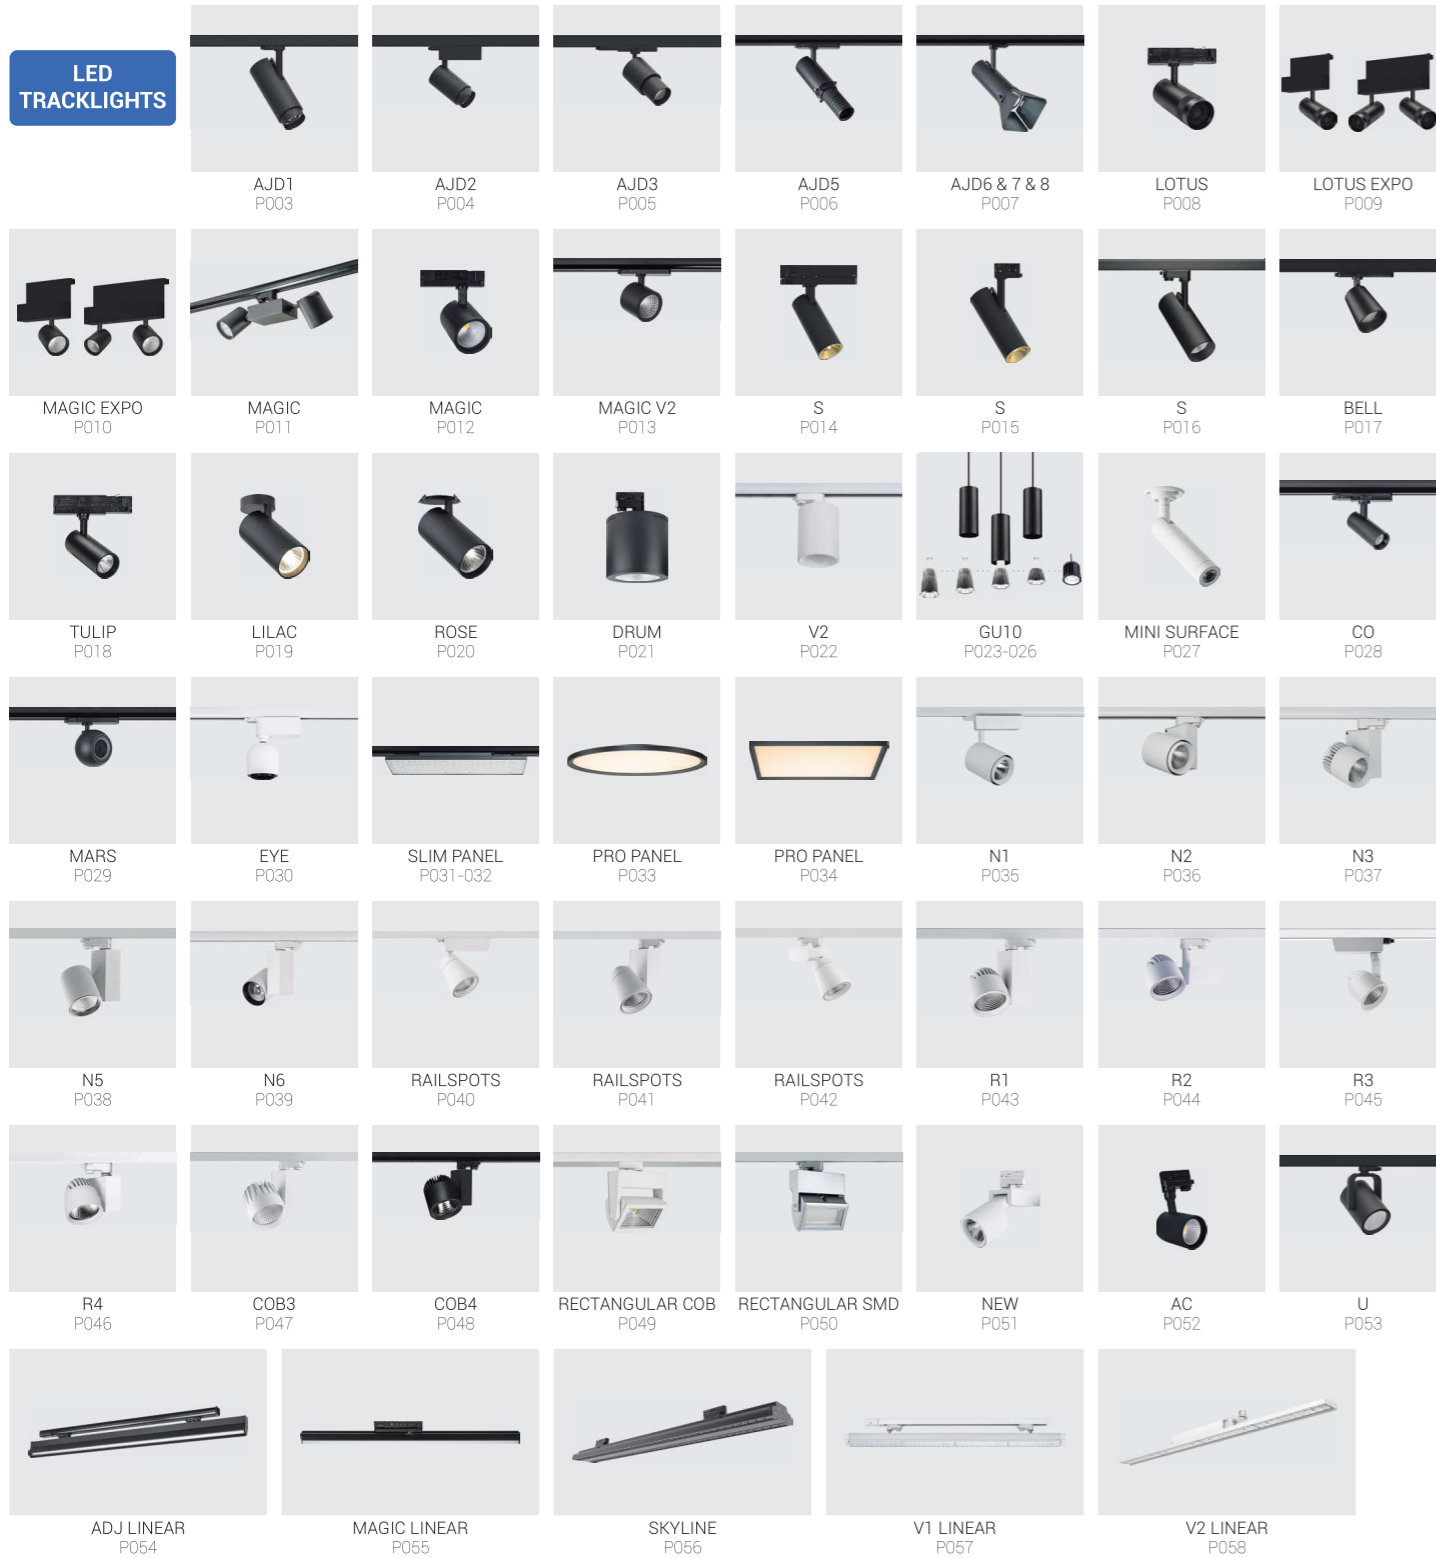

LED TRACKLIGHTS





ADJ5
P129

ADJ6
P130

ADJ7
P131

HD
P132

ADJ8
P133

ARCO
P134

ADJ9
P135-138



LOTUS EXPO
P139-141

AP
P142

GRILLE-BH
P143-145

GRILLE
P146-148

S
P149-152



DL
P153

DL-ASY
P154

RECESSED
P155-157

CAM
P158

RAINBOW
P159

ELEGANT
P160

V5
P161



SUNFLOWER
P162

PLUS
P163

MONO
P164

TEC
P165

ISO
P166

MF
P167

MG
P168

TD COB
P169



TD SMD
P170

COMFORT
P171

TUBE
P172


HOTEL-A
P173

HOTEL-B
P174

HOTEL-C
P175

HOTEL-D
P176

HOTEL-E
P177

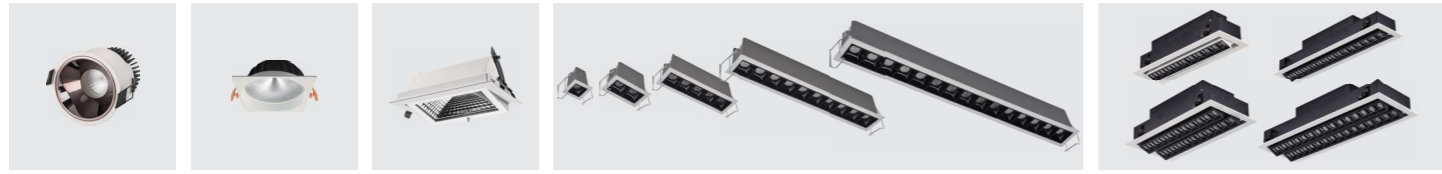

HOTEL-F
P178

REFLEX
P179

COB RECTANGULAR
P180

CATERPILLAR
P181

CATERPILLAR
P182



CATERPILLAR
P183

V2 CATERPILLAR
P184

SURFACE CATERPILLAR
P185



V3 CATERPILLAR
P186

V4 CATERPILLAR
P184

CATERPILLAR-ASY
P188

EYE
P189

MINO
P190



V2SURFACE
P191

ADJUSTABLE SURFACE
P192

JEWEL
P193

SURFACE
P194

LED PLAFONNIER




BULKHEAD
P195

BULKHEAD
P196

BULKHEAD
P197-199

LED WALL LAMP

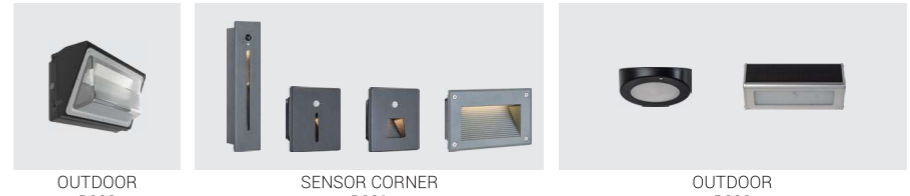


OUTDOOR
P200

SENSOR CORNER
P201

OUTDOOR
P202

LED OUTDOOR

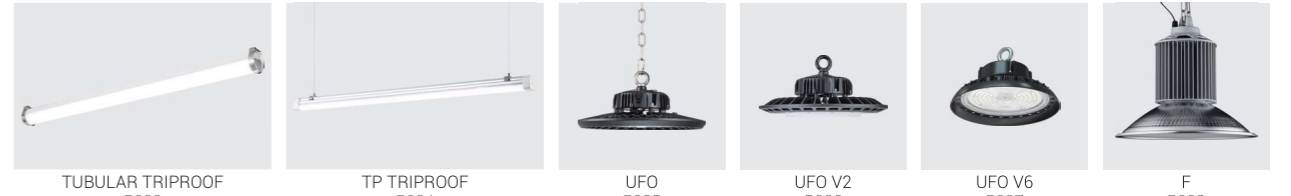

TUBULAR TRIPROOF
P203

TP TRIPROOF
P204

UFO
P205

UFO V2
P206

UFO V6
P207

F
P208



LINEAR
P209

LN PANEL
P210

SMD ASYMMETRIC
P211

V3
P212

CONVERTIBLE
P213



WALL WASHER
P214




MODULAR
P215-216



GARDEN LIGHTING
P217



ART LED DOWNLIGHTS

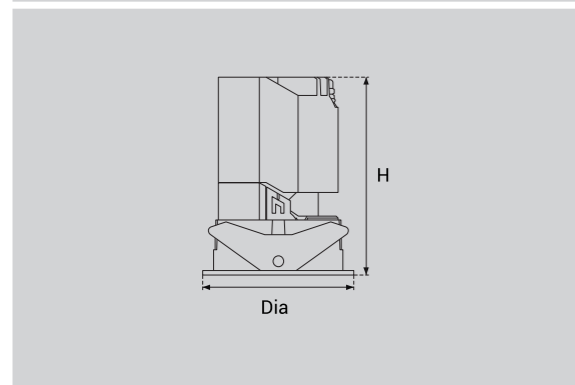


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ART1	6W	668lm	Dia61.6*H88mm	Dia55mm
UPL-10W-ART1	10W	1124lm	Dia84*H112mm	Dia75mm
UPL-15W-ART1	15W	1684lm	Dia110*H144mm	Dia95mm


Function



Adjustable & Trim changeable



ART LED DOWNLIGHTS

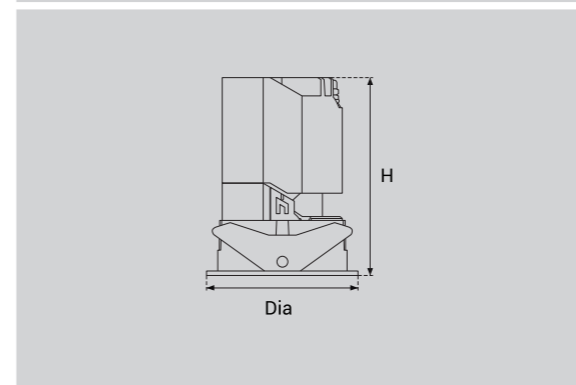


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-10W-ART1-O	10W	1130lm	Dia84*H112mm	Dia75mm
UPL-10W-ART1-R	10W	1124lm	Dia84*H112mm	Dia75mm

Function




Adjustable & Trim changeable



ART

LED DOWNLIGHTS

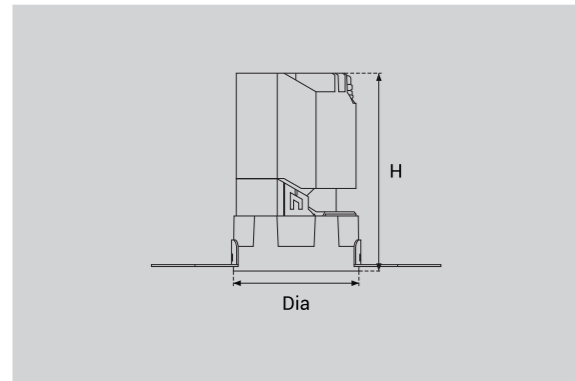


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ART-TL1	6W	668lm	Dia52.9*H88mm	Dia55mm
UPL-10W-ART-TL1	10W	1124lm	Dia72.4*H112mm	Dia75mm
UPL-15W-ART-TL1	15W	1684lm	Dia91.5*H144mm	Dia95mm

Function





Adjustable & Trim changeable



ART

LED DOWNLIGHTS

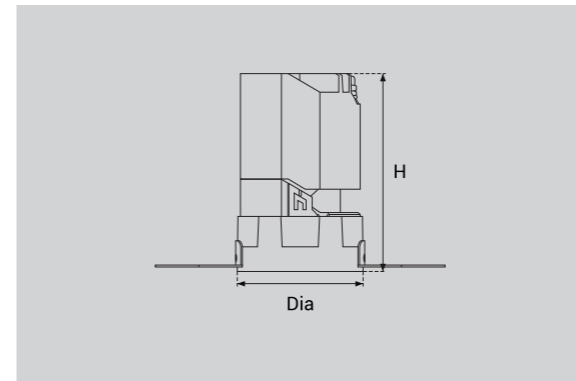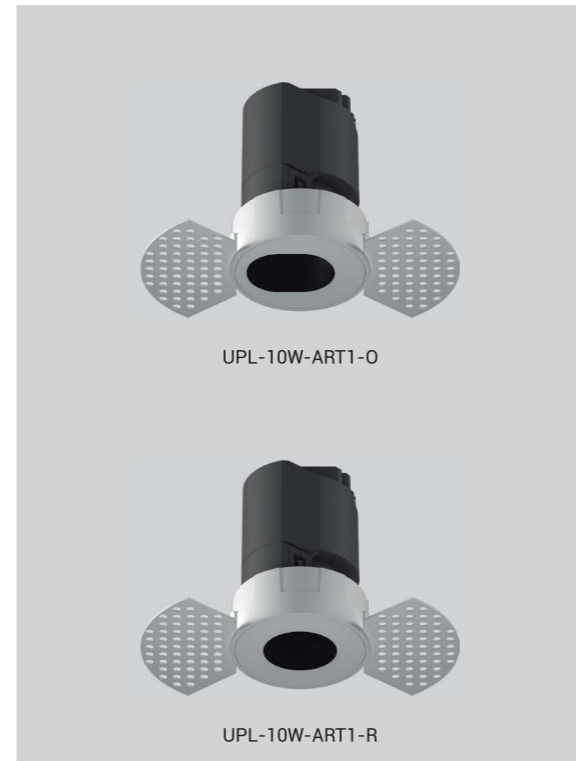


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-10W-ART-TL1-O	10W	1130lm	Dia72.4*H112mm	Dia75mm
UPL-10W-ART-TL1-R	10W	1124lm	Dia72.4*H112mm	Dia75mm

Function



Adjustable & Trim changeable




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ART-S1	6W	668lm	L63.5*W63.5*H88mm	L55*W55mm
UPL-10W-ART-S1	10W	1124lm	L84*W84*H112mm	L75*W75mm
UPL-15W-ART-S1	15W	1684lm	L104.5*W104.5*H144mm	L95*W95mm

Function



Adjustable & Trim changeable

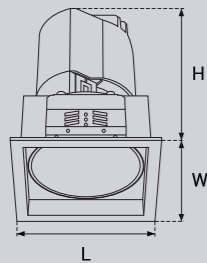


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-10W-ART-S1-0	10W	1119lm	L84*W84*H112mm	L75*W75mm
UPL-10W-ART-S1-R	10W	1124lm	L84*W84*H112mm	L75*W75mm
UPL-10W-ART-S1-S	10W	1129lm	L84*W84*H112mm	L75*W75mm

Function



Adjustable & Trim changeable

ART LED DOWNLIGHTS




UPL-10W-ART-S1-0



UPL-10W-ART-S1-R



UPL-10W-ART-S1-S

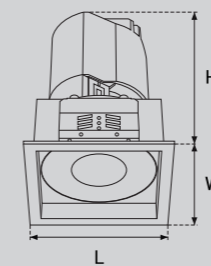




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours



Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ART-TLS1	6W	668lm	L53,8*W53,8*H88mm	L55*W55mm
UPL-10W-ART-TLS1	10W	1124lm	L73.5*W73.5*H112mm	L75*W75mm
UPL-15W-ART-TLS1	15W	1684lm	L93,6*W93,6*H144mm	L95*W95mm

Function



Adjustable & Trim changeable

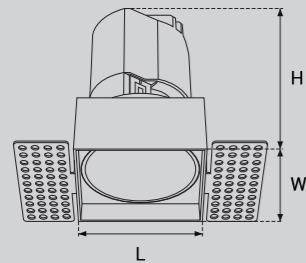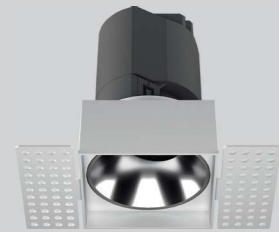


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection


Model	Power	Lumens	Dimensions	Hole cutting
UPL-10W-ART-TL1-O	10W	1130lm	L73.5*W73.5*H112mm	L75*W75mm
UPL-10W-ART-TL1-R	10W	1123lm	L73.5*W73.5*H112mm	L75*W75mm
UPL-10W-ART-TL1-R	10W	1127lm	L73.5*W73.5*H112mm	L75*W75mm

Function




Adjustable & Trim changeable

ART LED DOWNLIGHTS

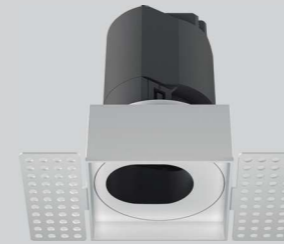


UPL-10W-ART-S1-O

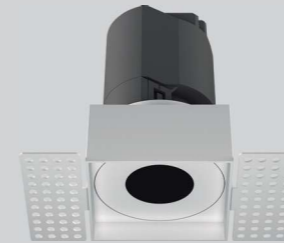

UPL-10W-ART-S1-R




UPL-10W-ART-S1-S

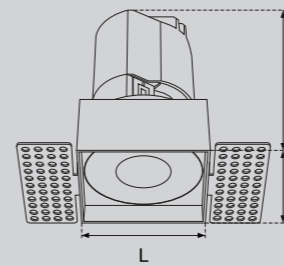



ART

LED DOWNLIGHTS

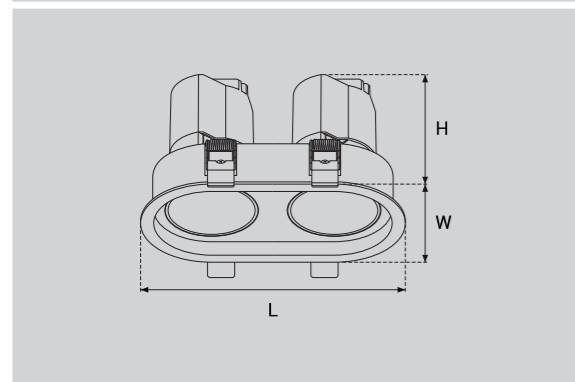


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ART2	2x6W	1340lm	L139.5*W78*H88mm	L125*W65mm
UPL-2x10W-ART2	2x10W	2236lm	L193.8*W104*H112mm	L180*W90mm
UPL-2x15W-ART2	2x15W	3390lm	L238.5*W124.5*H144mm	L225*W110mm

Function




Adjustable & Trim changeable



ART

LED DOWNLIGHTS

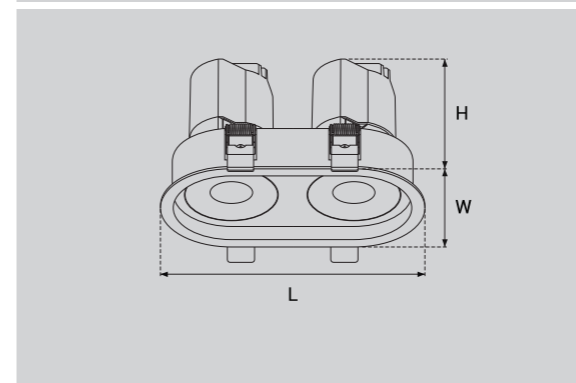


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x10W-ART2-O	2X10W	2235lm	L193.8*W104*H112mm	L180*W90mm
UPL-2x10W-ART2-R	2X10W	2236lm	L193.8*W104*H112mm	L180*W90mm

Function



Adjustable & Trim changeable




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ART-TL2	2x6W	1341lm	L125.5*W64.5*H88mm	L128*W68mm
UPL-2x10W-ART-TL2	2x10W	2248lm	L176.9*W87.4*H112mm	L180*W90mm
UPL-2x15W-ART-TL2	2x15W	3392lm	L221.5*W107.5*H144mm	L225*W110mm

Function



Adjustable & Trim changeable

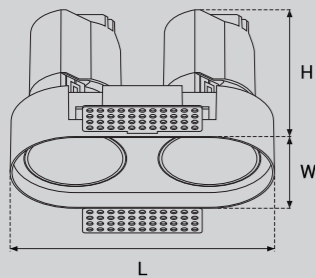


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x10W-ART-TL2-O	2x10W	2242lm	L176.9*W87.4*H112mm	L180*W90mm
UPL-2x10W-ART-TL2-R	2x10W	2245lm	L176.9*W87.4*H112mm	L180*W90mm

Function



Adjustable & Trim changeable

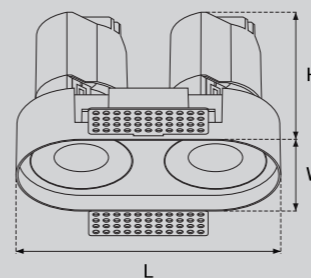

ART LED DOWNLIGHTS



ART LED DOWNLIGHTS



UPL-2x10W-ART-TL2-O




UPL-2x10W-ART-TL2-R



ART

LED DOWNLIGHTS

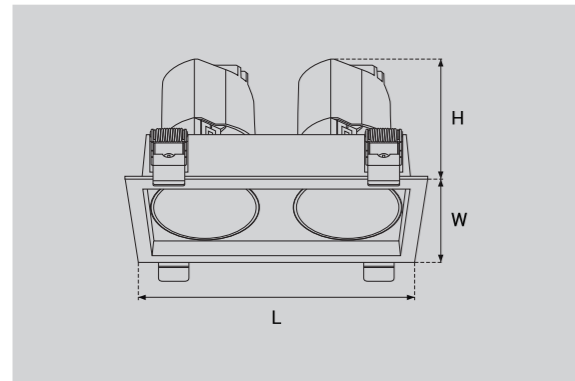


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ART-S2	2x6W	1340lm	L129.5*W68.5*H88mm	L120*W60mm
UPL-2x10W-ART-S2	2x10W	2236lm	L180*W90.5*H112mm	L165*W75mm
UPL-2x15W-ART-S2	2x15W	3390lm	L198*W104.5*H144mm	L190*W95mm

Function




Adjustable & Trim changeable



ART

LED DOWNLIGHTS

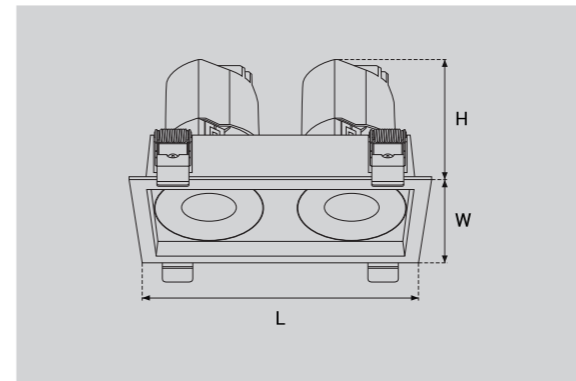


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x10W-ART-S2-O	2X10W	2235lm	L180*W90.5*H112mm	L165*W75mm
UPL-2x10W-ART-S2-R	2X10W	2236lm	L180*W90.5*H112mm	L165*W75mm


Function



Adjustable & Trim changeable



ART LED DOWNLIGHTS

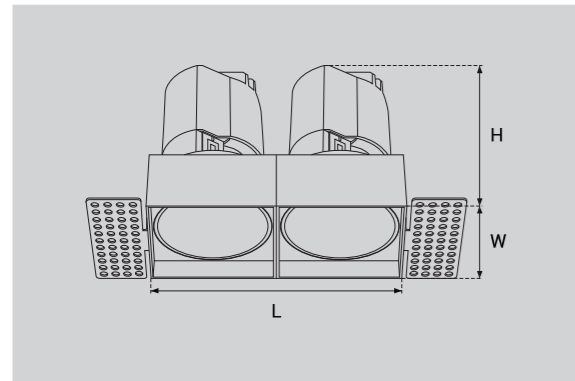


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ART-TLS2	2x6W	1340lm	L107.6*W53.8*H88mm	L110*W55mm
UPL-2x10W-ART-TLS2	2x10W	2236lm	L147*W73.5*H112mm	L150*W75mm
UPL-2x15W-ART-TLS2	2x15W	3390lm	L187.2*W93.6*H144mm	L190*W95mm


Function



Adjustable & Trim changeable



ART LED DOWNLIGHTS

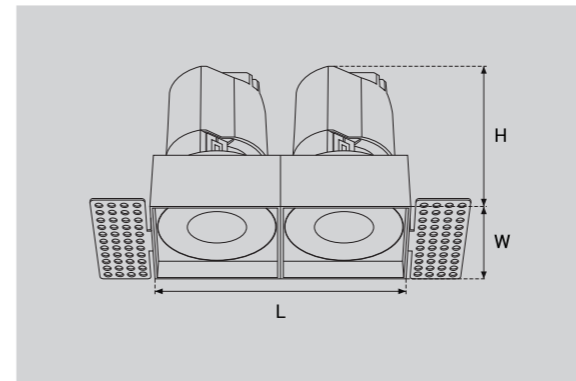


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x10W-ART-TLS2-O	2X10W	2235lm	L147*W73.5*H112mm	L150*W75mm
UPL-2x10W-ART-TLS2-R	2X10W	2236lm	L147*W73.5*H112mm	L150*W75mm

Function



Adjustable & Trim changeable




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-ART-S3	3x6W	2019lm	L171*W63.5*H88mm	L160*W55mm
UPL-3x10W-ART-S3	3x10W	3396lm	L231.5*W84.5*H112mm	L220*W75mm
UPL-3x15W-ART-S3	3x15W	5010lm	L293.5*W104.5*H144mm	L285*W95mm

Function



Adjustable & Trim changeable

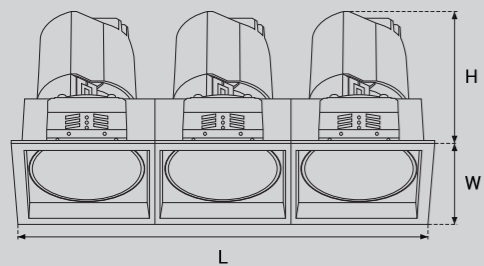


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-ART-TLS3	3x6W	2019lm	L161.5*W53.8*H88mm	L160*W55mm
UPL-3x10W-ART-TLS3	3x10W	3396lm	L220.5*W73.5*H112mm	L225*W75mm
UPL-3x15W-ART-TLS3	3x15W	5010lm	L280.8*W93.6*H144mm	L285*W95mm

Function




Adjustable & Trim changeable

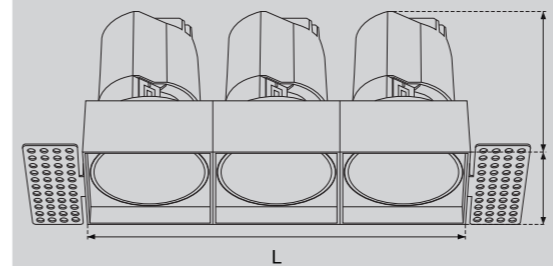

ART LED DOWNLIGHTS



ART LED DOWNLIGHTS

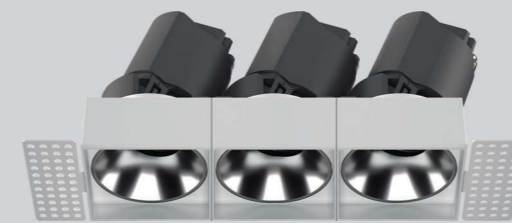




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-4x6W-ART-S4	4x6W	2676lm	L117.5*W117.5*H88mm	L108*W108mm
UPL-4x10W-ART-S4	4x10W	4489lm	L158*W158*H112mm	L150*W150mm
UPL-4x15W-ART-S4	4x15W	6660lm	L198*W198*H144mm	L190*W190mm

Function



Adjustable & Trim changeable

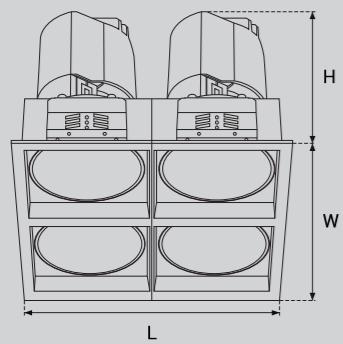


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflectors	White/Black/Silver/Chrome/dark Chrome/Golden
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-4x6W-ART-TLS4	4x6W	2676lm	L107.6*W107.6*H88mm	L110*W110mm
UPL-4x10W-ART-TLS4	4x10W	4489lm	L147*W147*H112mm	L150*W150mm
UPL-4x15W-ART-TLS4	4x15W	6660lm	L187.2*W187.2*H144	L190*W190mm

Function




Adjustable & Trim changeable

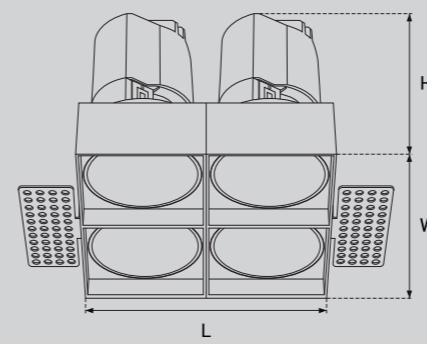

ART LED DOWNLIGHTS



ART LED DOWNLIGHTS

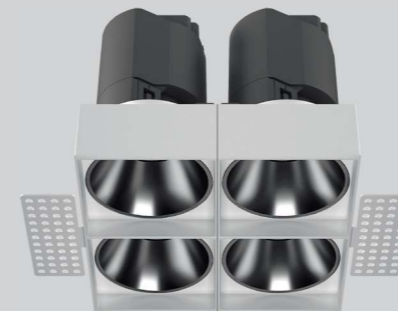




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ROBO1	6W	668lm	Dia61.6*H86mm	Dia55mm
UPL-10W-ROBO1	10W	1124lm	Dia84*H104mm	Dia75mm
UPL-15W-ROBO1	15W	1684lm	Dia110*H127mm	Dia95mm


Function



Tilt 90° & Rotatable 355°



Telescoping

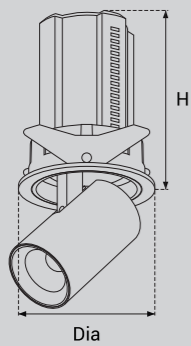

Dia




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ROBO-TL1	6W	668lm	Dia52.9*H86mm	Dia55mm
UPL-10W-ROBO-TL1	10W	1124lm	Dia72.4*H104mm	Dia75mm
UPL-15W-ROBO-TL1	15W	1684lm	Dia91.5*H127mm	Dia95mm


Function



Tilt 90° & Rotatable 355°



Telescoping

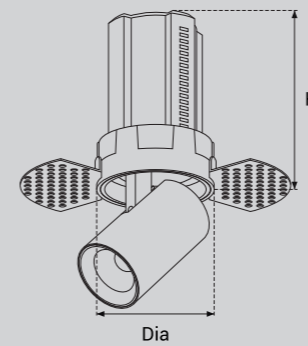

Dia

ROBO LED SPOTLIGHT



ROBO LED SPOTLIGHT






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ROBO-S1	6W	668lm	L63.5*W63.5*H94mm	L55*W55mm
UPL-10W-ROBO-S1	10W	1124lm	L84.5*W84.5*H116mm	L75*W75mm
UPL-15W-ROBO-S1	15W	1684lm	L104.5*W104.5*H144mm	L95*W95mm


Function




Tilt 90° & Rotatable 355°



Telescoping

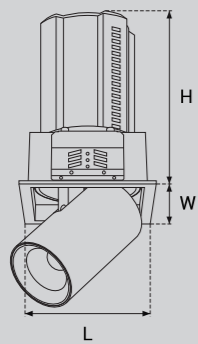

ROBO
LED SPOTLIGHT

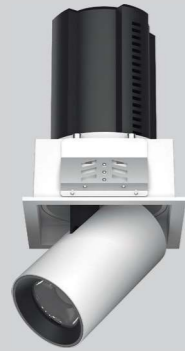


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ROBO-TLS1	6W	668lm	L53.8*W53.8*H94mm	L55*W55mm
UPL-10W-ROBO-TLS1	10W	1124lm	L73.5*W73.5*H116mm	L75*W75mm
UPL-15W-ROBO-TLS1	15W	1684lm	L93.6*W93.6*H144mm	L95*W95mm


Function



Tilt 90° & Rotatable 355°



Telescoping

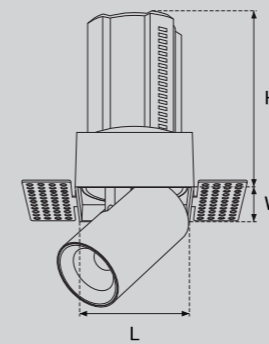

ROBO
LED SPOTLIGHT






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ROBO2	2x6W	1340lm	L139.5*W78.5*H91mm	L125*W65mm
UPL-2x10W-ROBO2	2x10W	2236lm	L193.8*W104.3*H116mm	L175*W90mm
UPL-2x15W-ROBO2	2x15W	3390lm	L238.5*W124.5*H140mm	L225*W110mm


Function



Tilt 90° & Rotatable 355°



Telescoping

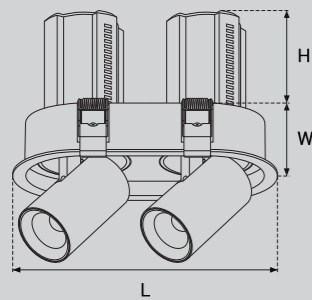

ROBO LED SPOTLIGHT




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ROBO-TL2	2x6W	1340lm	L125.5*W64.5*H91mm	L128*W68mm
UPL-2x10W-ROBO-TL2	2x10W	2236lm	L176.9*W87.4*H116mm	L180*W90mm
UPL-2x15W-ROBO-TL2	2x15W	3390lm	L238.5*W124.5*H133.5mm	L225*W110mm


Function



Tilt 90° & Rotatable 355°



Telescoping

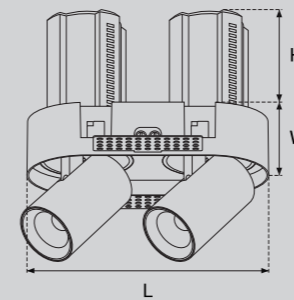

ROBO LED SPOTLIGHT






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ROBO-S2	2x6W	1340lm	L129.5*W68.5*H91mm	L115*W60mm
UPL-2x10W-ROBO-S2	2x10W	2236lm	L180*W90.5*H116mm	L165*W75mm
UPL-2x15W-ROBO-S2	2x15W	3390lm	L223.5*W109.5*H140mm	L205*W95mm


Function



Tilt 90° & Rotatable 355°



Telescoping

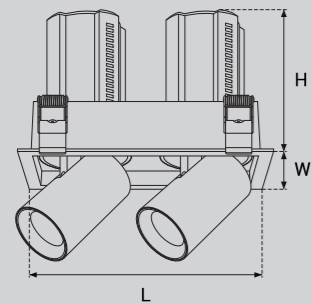


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ROBO-TLS2	2x6W	1340lm	L115.5*W54.5*H91mm	L120*W60mm
UPL-2x10W-ROBO-TLS2	2x10W	2236lm	L163*W73.5*H116mm	L165*W75mm
UPL-2x15W-ROBO-TLS2	2x15W	3390lm	L207.4*W93.4*H140mm	L210*W95mm


Function



Tilt 90° & Rotatable 355°



Telescoping

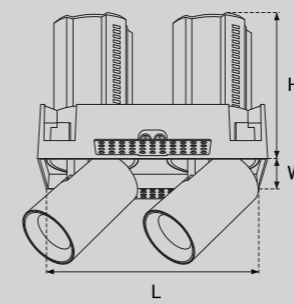

ROBO LED SPOTLIGHT



ROBO LED SPOTLIGHT






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-ROBO-S3	3x6W	2019lm	L171*W63.5*H94mm	L163*W55mm
UPL-3x10W-ROBO-S3	3x10W	3396lm	L231.5*W84.5*H116mm	L220*W75mm
UPL-3x15W-ROBO-S3	3x15W	5010lm	L293.5*W104.5*H144mm	L285*W95mm


Function



Tilt 90° & Rotatable 355°



Telescoping

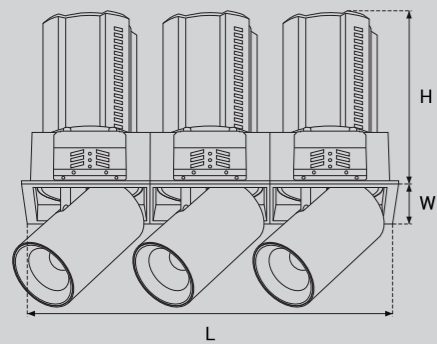


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-ROBO-TLS3	3x6W	2019lm	L161.5*W53.8*H94mm	L165*W55mm
UPL-3x10W-ROBO-TLS3	3x10W	3396lm	L220.5*W73.5*H116mm	L225*W75mm
UPL-3x15W-ROBO-TLS3	3x15W	5010lm	L280.8*W93.6*H144mm	L285*W95mm


Function



Tilt 90° & Rotatable 355°



Telescoping

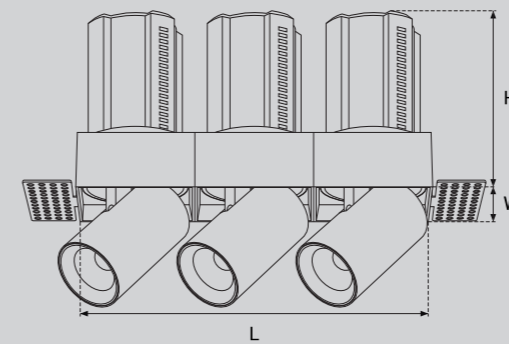




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-4x6W-ROBO-S4	4x6W	2676lm	L117.5*W117.5*H94mm	L105*W105mm
UPL-4x10W-ROBO-S4	4x10W	4489lm	L158*W158*H116mm	L150*W150mm
UPL-4x15W-ROBO-S4	4x15W	6660lm	L198*W198*H144mm	L190*W190mm


Function



Tilt 90° & Rotatable 355°



Telescoping

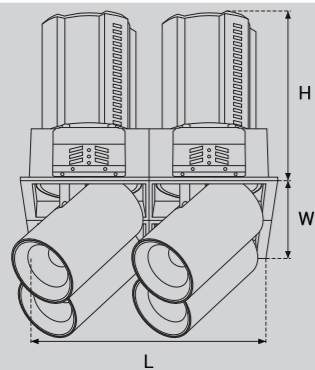


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Retractable & Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	10°/15°/24°/36°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-4x6W-ROBO-TLS4	4x6W	2676lm	L107.6*W107.6*H94mm	L110*W110mm
UPL-4x10W-ROBO-TLS4	4x10W	4489lm	L147*W147*H116mm	L152*W152mm
UPL-4x15W-ROBO-TLS4	4x15W	6660lm	L198*W198*H138mm	L192*W192mm


Function




Tilt 90° & Rotatable 355°





Telescoping

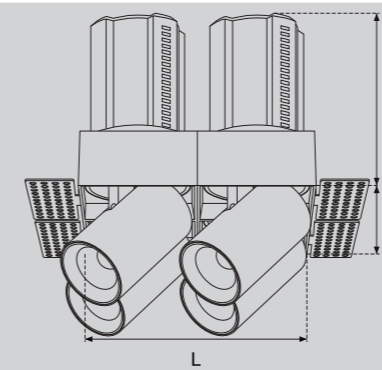

ROBO LED SPOTLIGHT

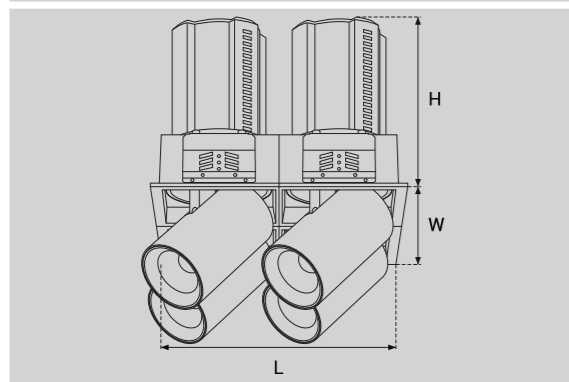

ROBO LED SPOTLIGHT

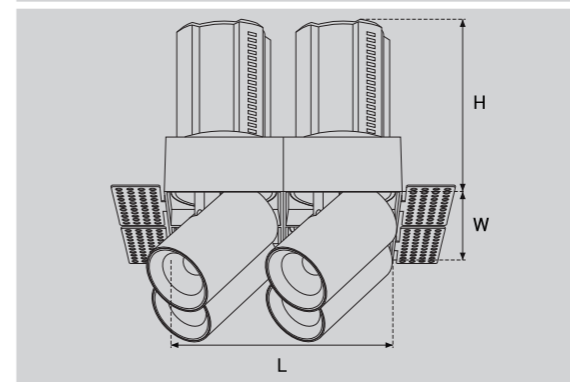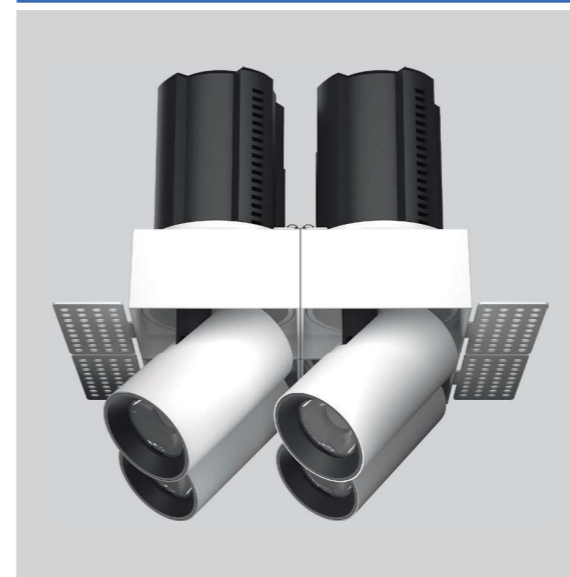




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ROCKET1	6W	673lm	Dia61.6*H88mm	Dia55mm
UPL-15W-ROCKET1	15W	1679lm	Dia84*H112mm	Dia75mm
UPL-30W-ROCKET1	30W	3369lm	Dia110*H144mm	Dia95mm

Function



Adjustable



Dia

H




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ROCKET-TL1	6W	673lm	Dia52.9*H88mm	Dia55mm
UPL-15W-ROCKET-TL1	15W	1679lm	Dia72.4*H112mm	Dia75mm
UPL-30W-ROCKET-TL1	30W	3369lm	Dia91.5*H144mm	Dia95mm

Function



Adjustable

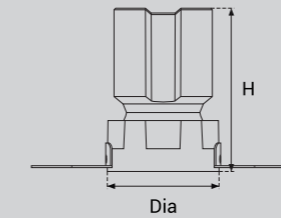


Dia

H

ROCKET LED SPOTLIGHT



ROCKET LED SPOTLIGHT

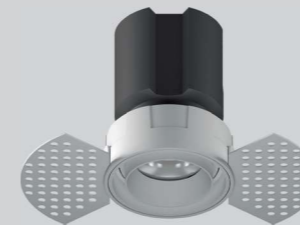




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ROCKET-S1	6W	673lm	L63.5*W63.5*H88mm	L55*W55mm
UPL-15W-ROCKET-S1	15W	1679lm	L84*W84*H112mm	L75*W75mm
UPL-30W-ROCKET-S1	30W	3369lm	L104.5*W104.5*H144mm	L95*W95mm

Function



Adjustable



ROCKET
LED SPOTLIGHT




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ROCKET-TLS1	6W	673lm	L53.8*W53.8*H88mm	L55*W55mm
UPL-15W-ROCKET-TLS1	15W	1679lm	L73.5*W73.5*H112mm	L75*W75mm
UPL-30W-ROCKET-TLS1	30W	3369lm	L93.5*W93.5*H144mm	L95*W95mm


Function



Adjustable

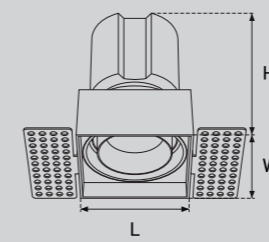

ROCKET
LED SPOTLIGHT

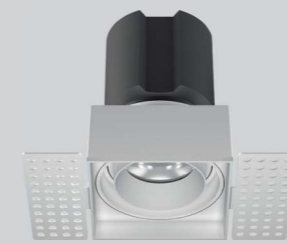




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ROCKET-2	2x6W	1340lm	L139.5*W78*H88mm	L125*W65mm
UPL-2x15W-ROCKET-2	2x15W	3395lm	L193.8*W104*H112mm	L178*W88mm
UPL-2x30W-ROCKET-2	2x30W	6786lm	L238.5*W124.5*H144mm	L225*W110mm

Function



Adjustable

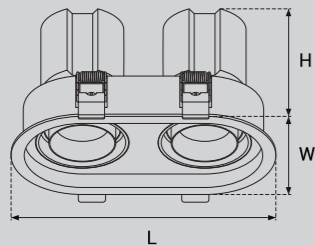

ROCKET LED SPOTLIGHT




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ROCKET-TL2	2x6W	1340lm	L125.5*W64.5*H88mm	L128*W68mm
UPL-2x15W-ROCKET-TL2	2x15W	3395lm	L176.9*W87.4*H112mm	L180*W90mm
UPL-2x30W-ROCKET-TL2	2x30W	6786lm	L221.5*W107.5*H144mm	L225*W110mm


Function



Adjustable

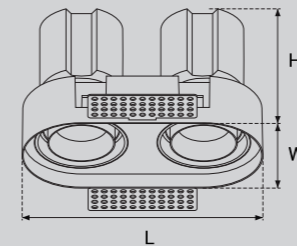

ROCKET LED SPOTLIGHT

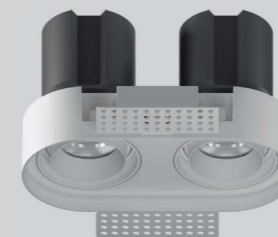




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ROCKET-S2	2x6W	1340lm	L129.5*W68.5*H88mm	L120*W60mm
UPL-2x15W-ROCKET-S2	2x15W	3395lm	L180*W90.5*H112mm	L165*W75mm
UPL-2x30W-ROCKET-S2	2x30W	6786lm	L223.5*W109.5*H144mm	L205*W95mm

Function



Adjustable

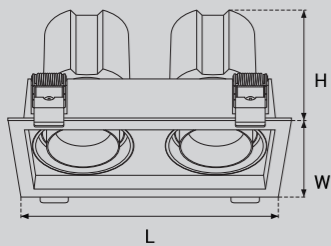


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-ROCKET-TLS2	2x6W	1340lm	L107.6*W53.8*H88mm	L110*W55mm
UPL-2x15W-ROCKET-TLS2	2x15W	3395lm	L147*W73.5*H112mm	L150*W75mm
UPL-2x30W-ROCKET-TLS2	2x30W	6786lm	L187.2*W93.6*H144mm	L190*W95mm


Function




Adjustable

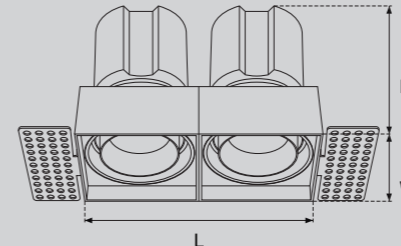

ROCKET LED SPOTLIGHT

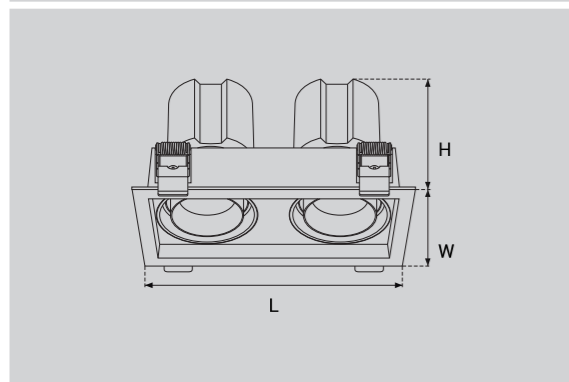

ROCKET LED SPOTLIGHT

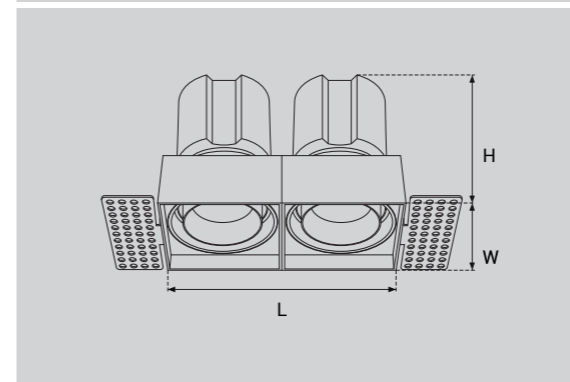




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-ROCKET-S3	3x6W	2023lm	L171*W63.5*H88mm	L165*W55mm
UPL-3x15W-ROCKET-S3	3x15W	5012lm	L231.5*W84.5*H112mm	L220*W75mm
UPL-3x30W-ROCKET-S3	3x30W	10011lm	L293.5*W104.5*H144mm	L284*W95mm

Function



Adjustable

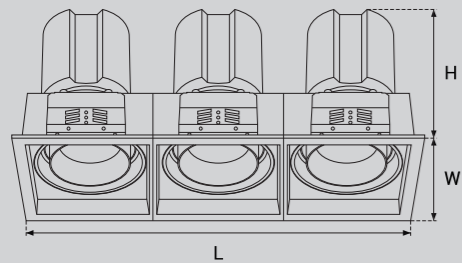


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-ROCKET-TLS3	3x6W	2032lm	L161.5*W53.8*H88mm	L165*W55mm
UPL-3x15W-ROCKET-TLS3	3x15W	5011lm	L220.5*W73.5*H112mm	L225*W75mm
UPL-3x30W-ROCKET-TLS3	3x30W	10013lm	L280.8*W193.6*H144mm	L285*W95mm

Function




Adjustable

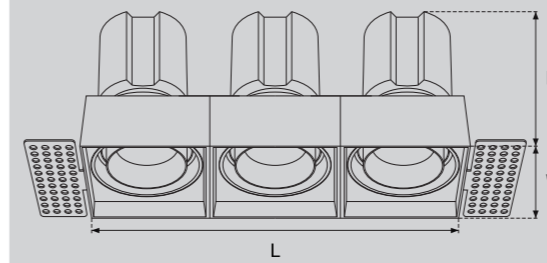



ROCKET LED SPOTLIGHT

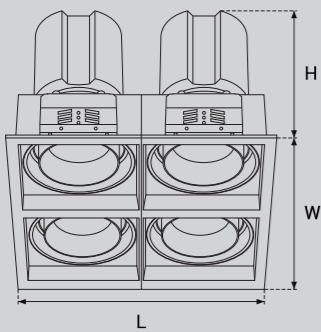


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-4x6W-ROCKET-S4	4x6W	2674lm	L117.5*W117.5*H88mm	L108*W108mm
UPL-4x15W-ROCKET-S4	4x15W	6658lm	L158*W158*H112mm	L150*W150mm
UPL-4x30W-ROCKET-S4	4x30W	13316lm	L198*W198*H144mm	L190*W190mm



Function



Adjustable



ROCKET LED SPOTLIGHT

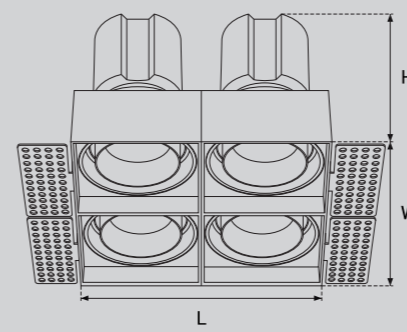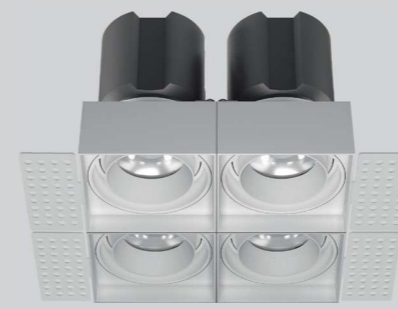


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Trim changeable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	8°/15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-4x6W-ROCKET-TLS4	4x6W	2679lm	L107.6*W107.6*H88mm	L110*W110mm
UPL-4x15W-ROCKET-TLS4	4x15W	6659lm	L147*W147*H112mm	L150*W150mm
UPL-4x30W-ROCKET-TLS4	4x30W	13320lm	L187.2*W187.2*H144mm	L190*W190mm

Function



Adjustable




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-FOSSIL2-A	2x6W	1340lm	L139.5*W78*H88mm	L125*W65mm
UPL-2x10W-FOSSIL2-A	2x10W	2247lm	L193.8*W104*H112mm	L180*W90mm
UPL-2x15W-FOSSIL2-A	2x15W	3379lm	L238.5*W124.5*H144mm	L225*W110mm


Function

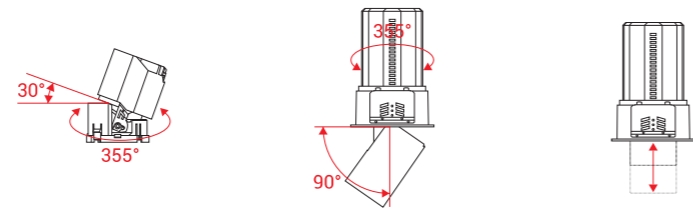

Adjustable

Tilt 90° & Rotatable 355°

Telescoping

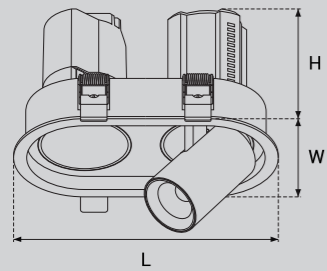

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-FOSSIL2-B	2x6W	1340lm	L139.5*W78*H88mm	L125*W65mm
UPL-2x10W-FOSSIL2-B	2x10W	2247lm	L193.8*W104*H112mm	L180*W90mm
UPL-2x15W-FOSSIL2-B	2x15W	3379lm	L238.5*W124.5*H144mm	L225*W110mm


Function




Adjustable

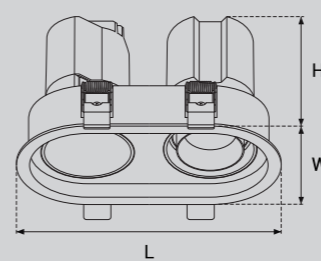

FOSSIL LED DOWNLIGHT

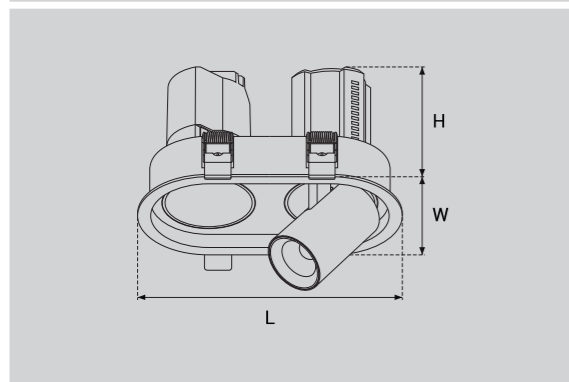

FOSSIL LED DOWNLIGHT

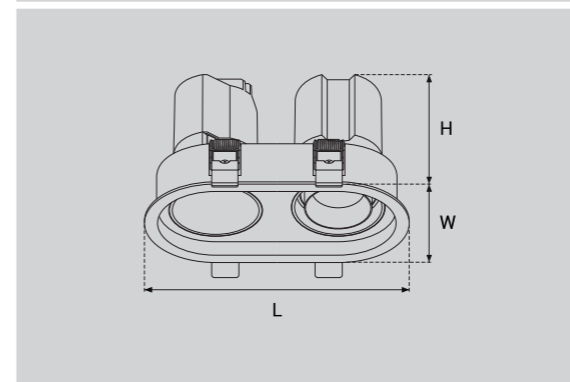




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-FOSSIL2-C	2x6W	1340lm	L139.5*W78*H88mm	L125*W65mm
UPL-2x10W-FOSSIL2-C	2x10W	2247lm	L193.8*W104*H112mm	L180*W90mm
UPL-2x15W-FOSSIL2-C	2x15W	3379lm	L238.5*W124.5*H144mm	L225*W110mm


Function

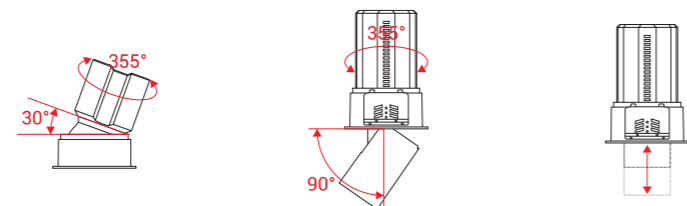

Adjustable

Tilt 90° & Rotatable 355°

Telescoping

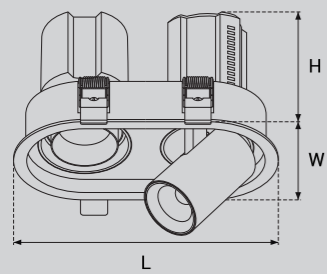


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-FOSSIL-TL2-A	2x6W	1340lm	L107.6*W53.8*H88mm	L110*W55mm
UPL-2x10W-FOSSIL-TL2-A	2x10W	2247lm	L147*W73.5*H112mm	L150*W75mm
UPL-2x15W-FOSSIL-TL2-A	2x15W	3379lm	L187.2*W93.6*H144mm	L190*W95mm


Function

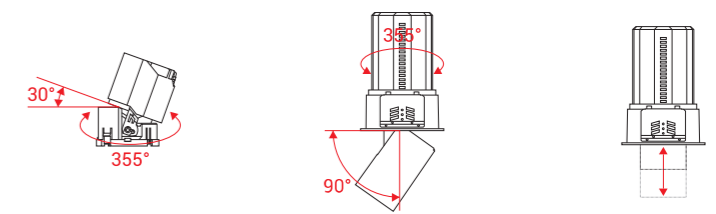


Adjustable

Tilt 90° & Rotatable 355°


Telescoping

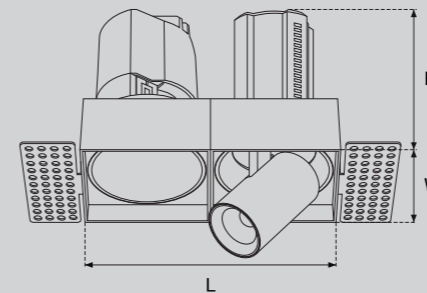

FOSSIL LED DOWNLIGHT

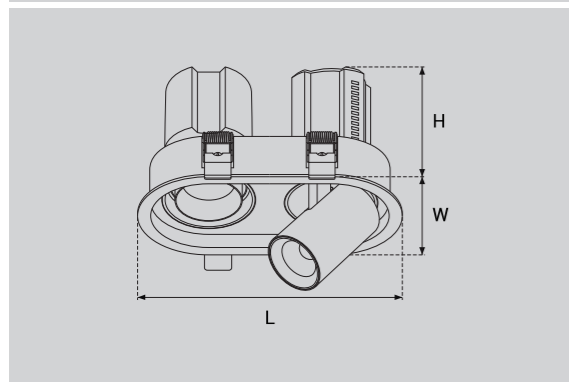


FOSSIL LED DOWNLIGHT

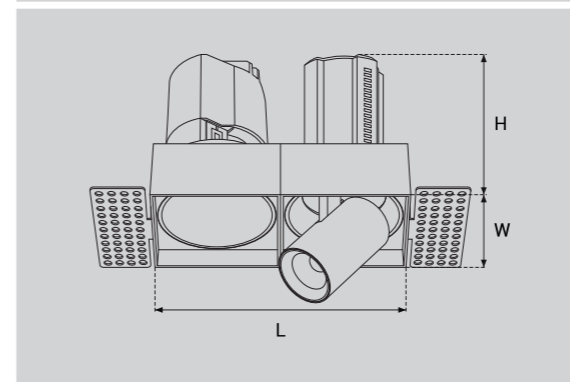



FOSSIL

LED DOWNLIGHT

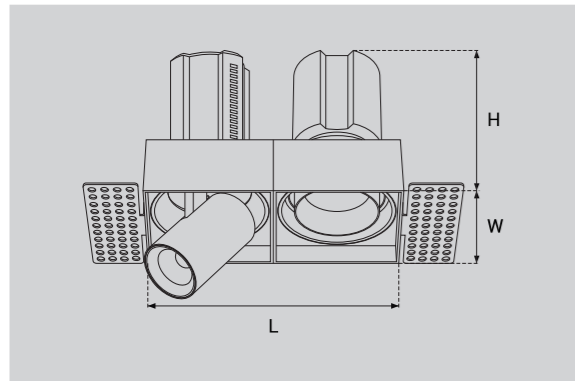


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-FOSSIL-TL2-B	2x6W	1340lm	L107.6*W53.8*H88mm	L110*W55mm
UPL-2x10W-FOSSIL-TL2-B	2x10W	2247lm	L147*W73.5*H112mm	L150*W75mm
UPL-2x15W-FOSSIL-TL2-B	2x15W	3379lm	L187.2*W93.6*H144mm	L190*W95mm


Function



Adjustable



Tilt 90° & Rotatable 355°




Telescoping



FOSSIL

LED DOWNLIGHT

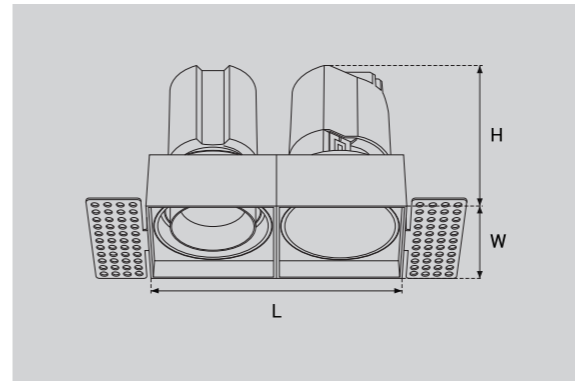


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-2x6W-FOSSIL-TL2-C	2x6W	1340lm	L107.6*W53.8*H88mm	L110*W55mm
UPL-2x10W-FOSSIL-TL2-C	2x10W	2247lm	L147*W73.5*H112mm	L150*W75mm
UPL-2x15W-FOSSIL-TL2-C	2x15W	3379lm	L187.2*W93.6*H144mm	L190*W95mm

Function



Adjustable






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-FOSSIL-S3-A	3x6W	2023lm	L171*W63.5*H88mm	L160*W55mm
UPL-3x10W-FOSSIL-S3-A	3x10W	3352lm	L231.5*W84.5*H112mm	L220*W75mm
UPL-3x15W-FOSSIL-S3-A	3x15W	5012lm	L293.5*W104.5*H144mm	L285*W95mm

Function

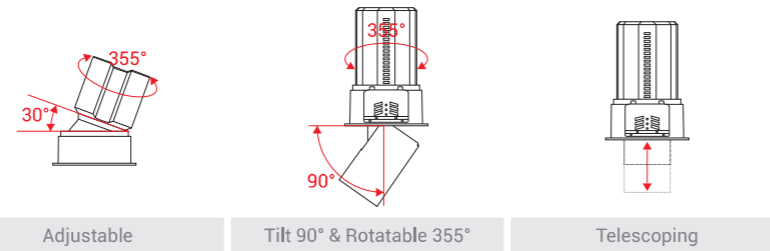

FOSSIL LED DOWNLIGHT

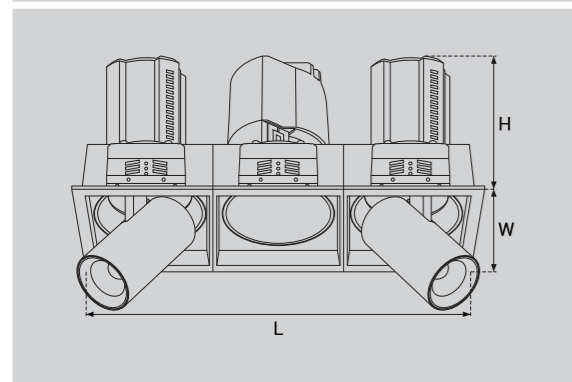


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-FOSSIL-S3-B	3x6W	2023lm	L171*W63.5*H88mm	L160*W55mm
UPL-3x10W-FOSSIL-S3-B	3x10W	3352lm	L231.5*W84.5*H112mm	L220*W75mm
UPL-3x15W-FOSSIL-S3-B	3x15W	5012lm	L293.5*W104.5*H144mm	L285*W95mm

Function

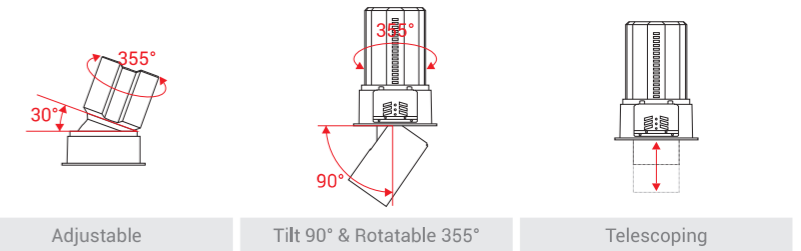


FOSSIL LED DOWNLIGHT

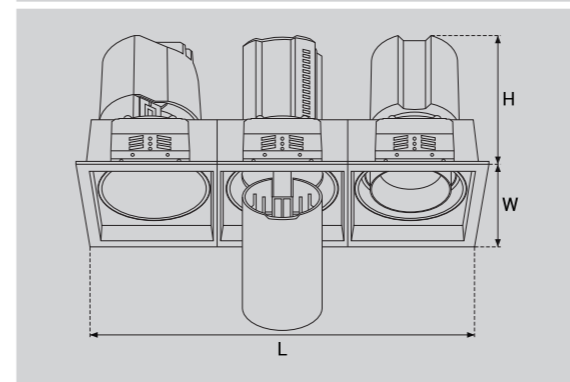



FOSSIL

LED DOWNLIGHT

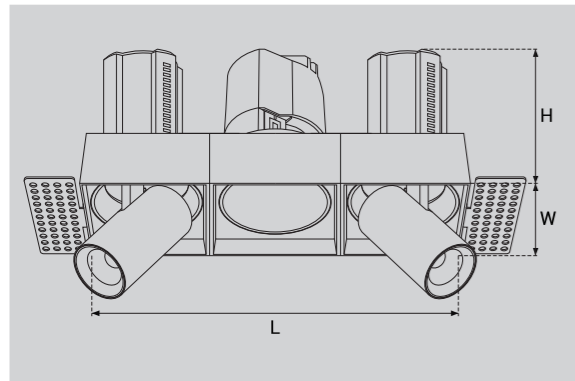


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection


Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-FOSSIL-TLS3-A	3x6W	2023lm	L161.5*W53.8*H88mm	L165*W55mm
UPL-3x10W-FOSSIL-TLS3-A	3x10W	3352lm	L220.5*W73.5*H112mm	L225*W75mm
UPL-3x15W-FOSSIL-TLS3-A	3x15W	5012lm	L280.8*W93.6*H144mm	L285*W95mm

Function

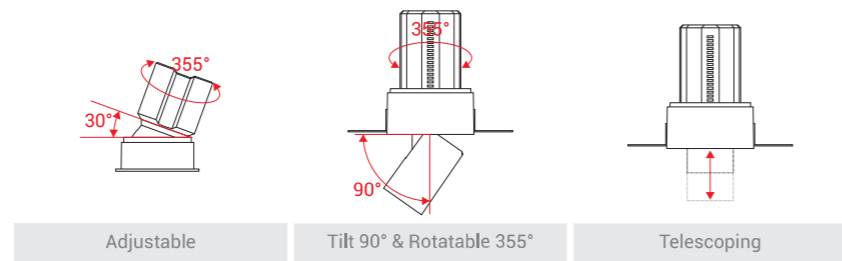

FOSSIL

LED DOWNLIGHT

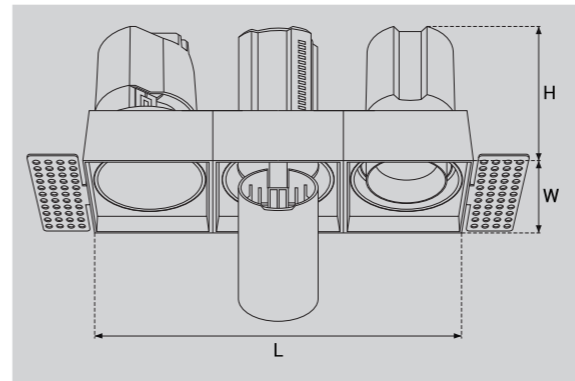


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-3x6W-FOSSIL-TLS3-B	3x6W	2023lm	L161.5*W53.8*H88mm	L165*W55mm
UPL-3x10W-FOSSIL-TLS3-B	3x10W	3352lm	L220.5*W73.5*H112mm	L225*W75mm
UPL-3x15W-FOSSIL-TLS3-B	3x15W	5012lm	L280.8*W93.6*H144mm	L285*W95mm

Function

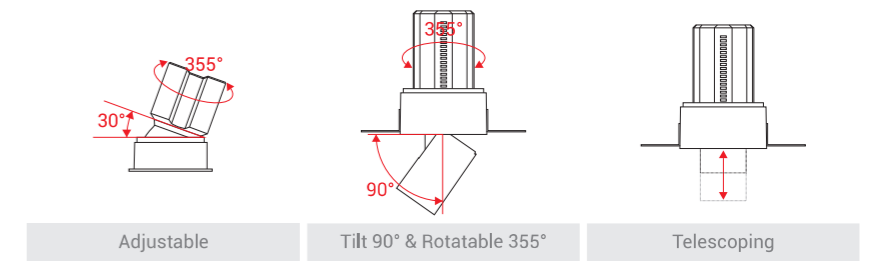




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-4x6W-FOSSIL-S4	4x6W	2682lm	L117.5*W117.5*H88mm	L108*W108mm
UPL-4x10W-FOSSIL-S4	4x10W	4493lm	L158*W158*H112mm	L150*W150mm
UPL-4x15W-FOSSIL-S4	4x15W	6671lm	L198*W198*H144mm	L190*W190mm

Function

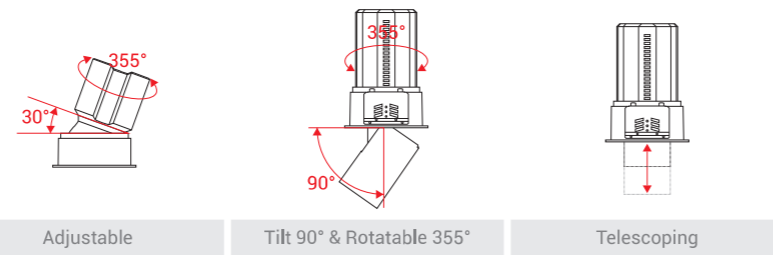

FOSSIL LED DOWNLIGHT

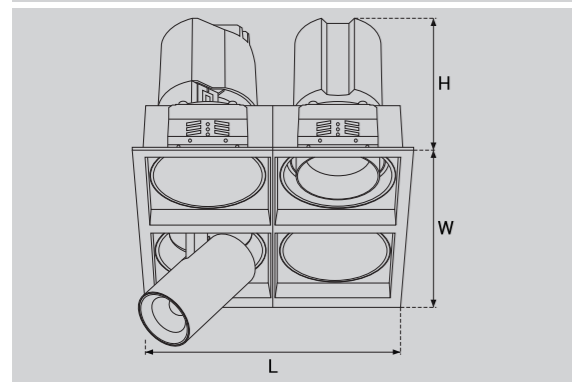


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable & Rotatable
Feature	Trimless & Frameless
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-4x6W-FOSSIL-S4	4x6W	2682lm	L107.6*W107.6*H88mm	L110*W110mm
UPL-4x10W-FOSSIL-S4	4x10W	4493lm	L147*W147*H112mm	L150*W150mm
UPL-4x15W-FOSSIL-S4	4x15W	6671lm	L187.2*W187.2*H144mm	L190*W190mm

Function

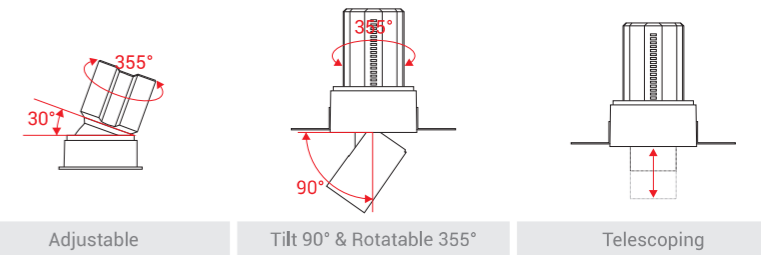

FOSSIL LED DOWNLIGHT

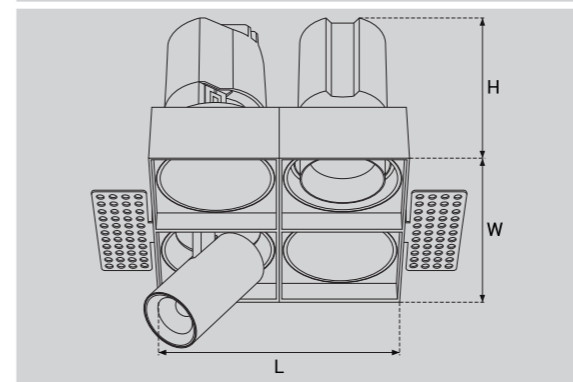




Technical Parameter

Input voltage	AC230V 50HZ
Light source	BRIDGELUX COB LEDs
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Function	Adjustable fixture & Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	24°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-10W-MINI	10W	1076lm	Dia85*H35mm	Dia70-75mm

MINI
LED CEILING LIGHTS

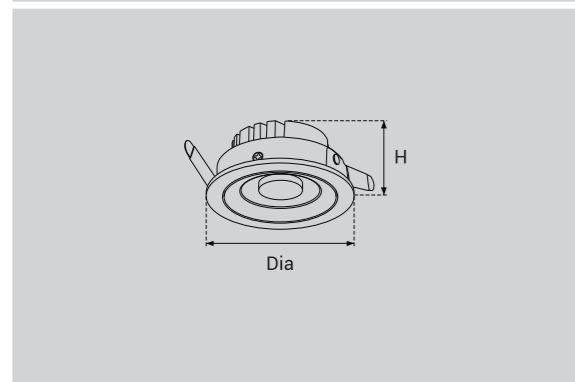


Technical Parameter

Input voltage	AC230V 50HZ
Light source	BRIDGELUX COB LEDs
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Function	Adjustable fixture & Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-10W-BIN	10W	1079lm	Dia90*H40mm	Dia70-75mm

MINI
LED CEILING LIGHTS

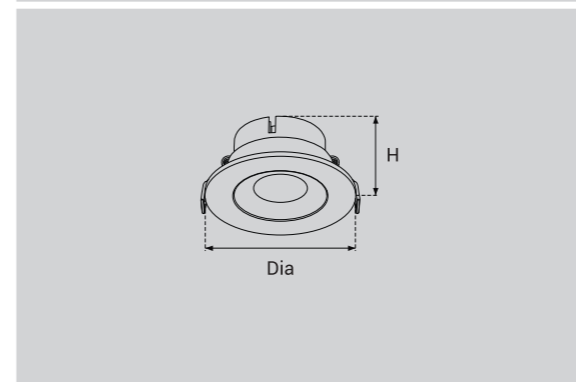





Technical Parameter

Input voltage	AC230V 50HZ
Light source	CITIZEN COB LEDs
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Function	Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-CL-6W-SLIM	6W	620lm	Dia62*H25mm	Dia55mm
UPL-CL-9W-SLIM	9W	928lm	Dia72*H28mm	Dia60-65mm
UPL-CL-12W-SLIM	12W	1279lm	Dia83*H31mm	Dia70-75mm
UPL-CL-15W-SLIM	15W	1605lm	Dia105*H34.5mm	Dia90-95mm

MINI
LED CEILING LIGHTS

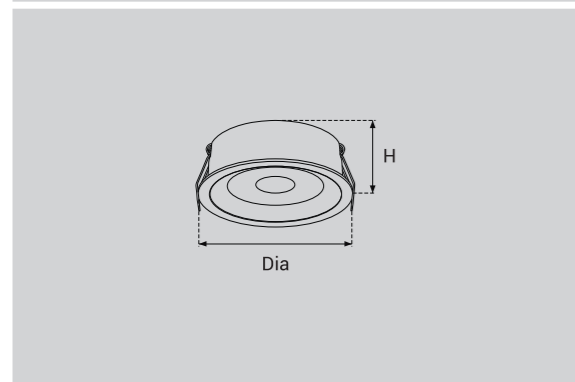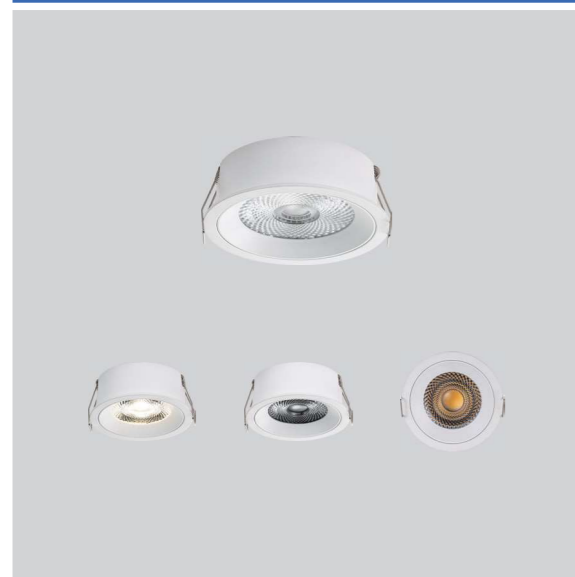



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CITIZEN COB LEDs
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Function	Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-7W-MIRA-R	7W	730lm	Dia85*H35mm	Dia75mm
UPL-ADJ-7W-MIRA	7W	728lm	L85*W85*H35mm	L75*W75mm

MINI
LED CEILING LIGHTS

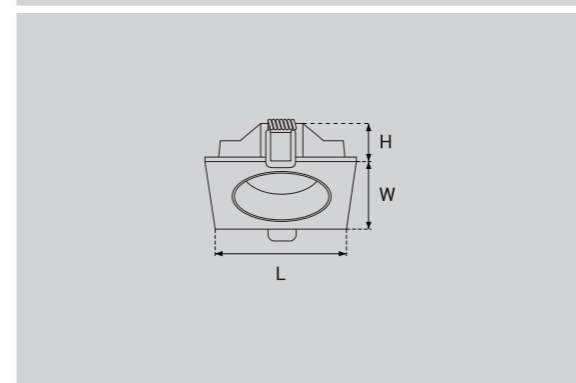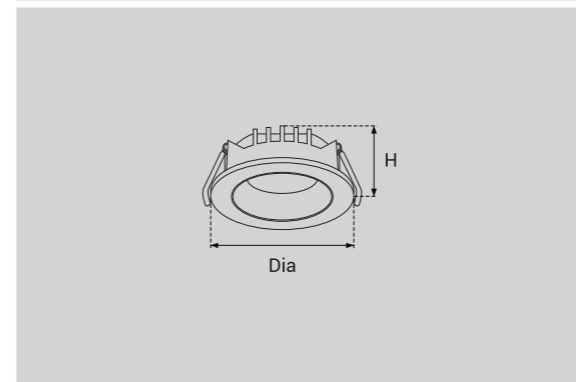





MINI LED CEILING LIGHTS



UPL-ADJ-2x7W-MIRA

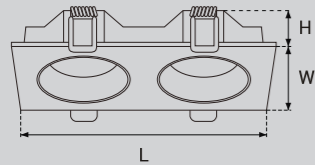

UPL-ADJ-3x7W-MIRA-R

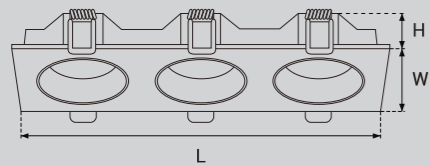

Technical Parameter


Input voltage	AC230V 50HZ
Light source	CITIZEN COB LEDs
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Function	Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-2x7W-MIRA	2x7W	1448lm	L170*W85*H35mm	L160*W75mm
UPL-ADJ-3x7W-MIRA	3x7W	2162lm	L247*W85*H35mm	L233*W75mm



MINI ANTI-GLARE LED CEILING LIGHTS



Technical Parameter

Input voltage	AC230V 50HZ
Light source	OSRAM/CREE COB LEDs
LED drivers	Lifud
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/25°/45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-CL-2W-D25	2W	201lm	Dia30*H24mm	Dia25mm
UPL-CL-3W-D35	3W	305lm	Dia40*H31mm	Dia35mm
UPL-CL-5W-D50	5W	513lm	Dia55*H51.5mm	Dia50mm
UPL-CL-8W-D60	8W	828lm	Dia65*H62mm	Dia60mm
UPL-CL-12W-D70	12W	1255lm	Dia75*H70mm	Dia70mm





CAMELLIA LED DOWNLIGHTS



Technical Parameter


Input voltage	AC230V 50HZ
Light source	CREE COB LEDs
LED drivers	TRIDONIC/PHILIPS/OSARM/TCI
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Waterproof Grade	IP65
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-15W-CAMELLIA-IP65	15W	1554lm	L110*W110*H59mm	L90*W90mm
UPL-DL-20W-CAMELLIA-IP65	20W	2061lm	L127*W127*H70mm	L110*W110mm
UPL-DL-30W-CAMELLIA-IP65	30W	3067lm	L165*W165*H80mm	L145*W145mm
UPL-DL-45W-CAMELLIA-IP65	45W	4589lm	L220*W220*H90mm	L200*W200mm



COCO LED DOWNLIGHTS



Technical Parameter


Input voltage	AC230V 50HZ
Light source	CREE COB LEDs
LED drivers	TRIDONIC/PHILIPS/OSARM/TCI
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Waterproof Grade	IP65
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-15W-COCO-IP65	15W	1552lm	Dia110*H59mm	Dia90-100mm
UPL-DL-20W-COCO-IP65	20W	2060lm	Dia127*H70mm	Dia110-115mm
UPL-DL-30W-COCO-IP65	30W	3065lm	Dia165*H80mm	Dia145-150mm
UPL-DL-45W-COCO-IP65	45W	4582lm	Dia220*H90mm	Dia200mm

RECESSED LINEAR

LED DOWNLIGHTS

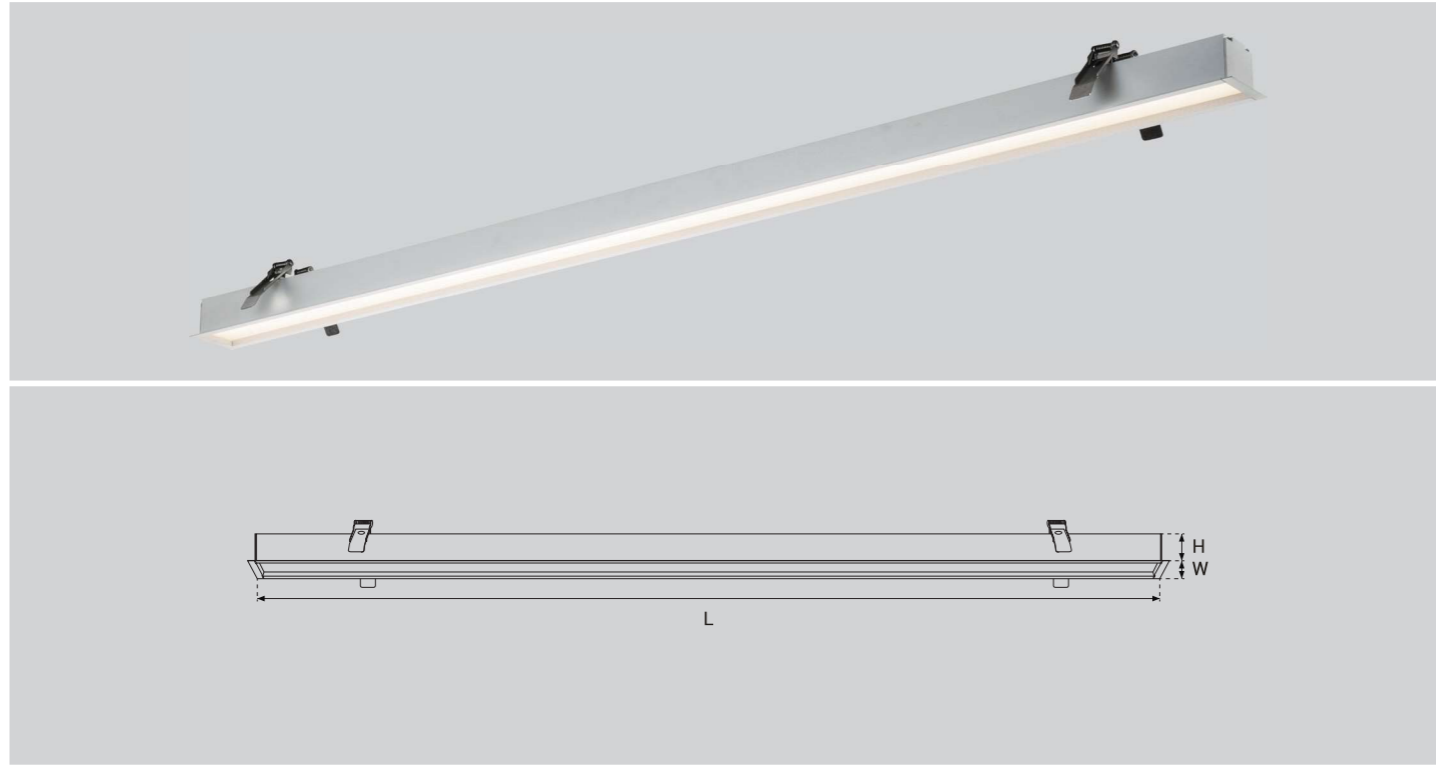


Technical Parameter	
Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	OSRAM/PHILIPS/TCI/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Lumens	120-130LM/W
CCT	3000K/3500K/4000K/5000K
Beam angle	120°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection					
Model	Power	Lumens	Dimensions	Hole cutting	
UPL-LP-40W-120	40W	4080lm	L1219xW62xH42mm	L1208*W52mm	
UPL-LP-60W-120	60W	6112lm	L1219xW62xH42mm	L1208*W52mm	

RECESSED LINEAR

LED DOWNLIGHTS

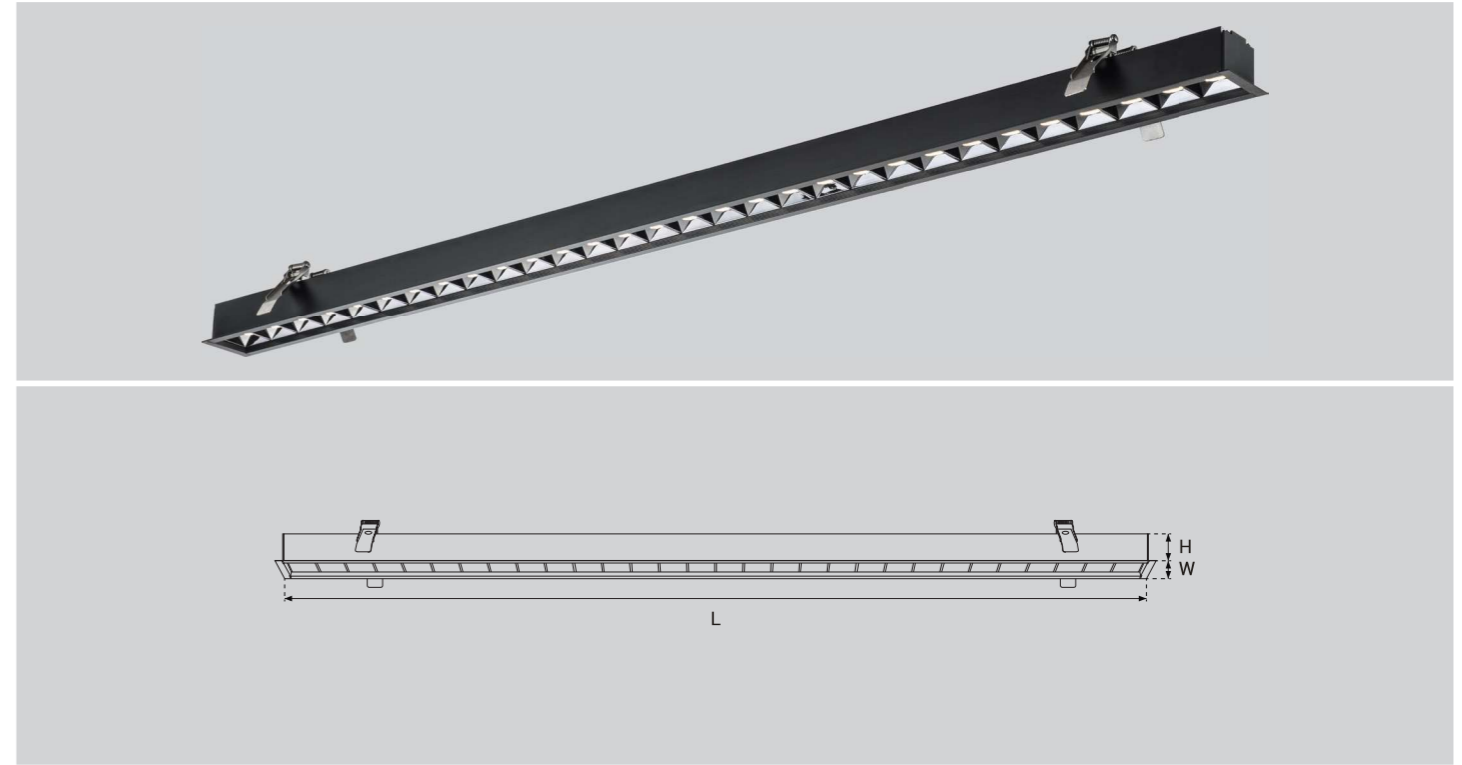

Technical Parameter	
Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	OSRAM/PHILIPS/TCI/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Lumens	120-130LM/W
CCT	3000K/3500K/4000K/5000K
Beam angle	12°/24°/38°/50°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection					
Model	Power	Lumens	Dimensions	Hole cutting	
UPL-LL-40W-120	40W	4080lm	L1165*W62*H42mm	L1155*W52mm	
UPL-LL-60W-120	60W	6112lm	L1165*W62*H42mm	L1155*W52mm	




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/30°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ1-15W	15W	1596lm	Dia96*H90mm	Dia90mm
UPL-ADJ1-25W	25W	2589lm	Dia128*H120mm	Dia120mm

ADJ1
LED DOWNLIGHTS

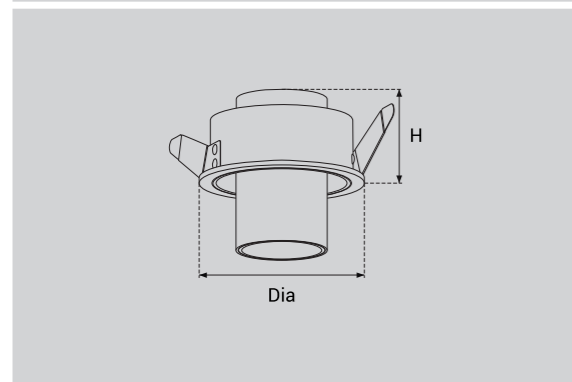



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/30°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ2-15W	15W	1596lm	Dia120*H90mm	Dia90mm
UPL-ADJ2-25W	25W	2589lm	Dia145*H120mm	Dia120mm

ADJ2
LED DOWNLIGHTS

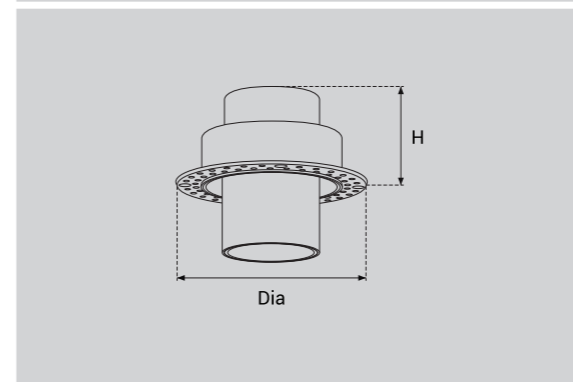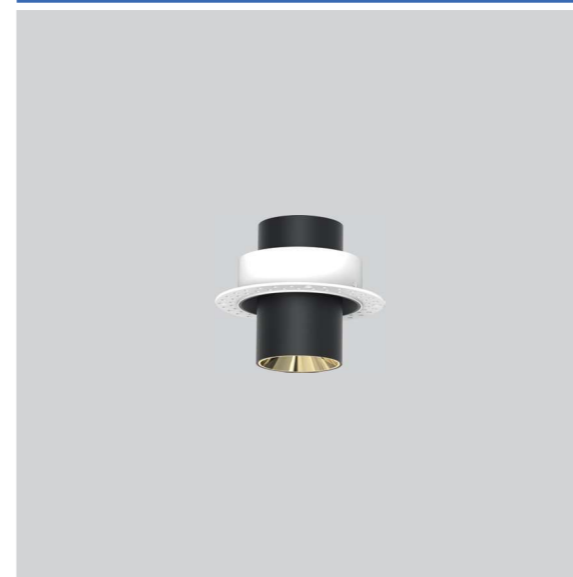




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/40°/Asymmetric
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ4-7W	7W	785lm	Dia65*H84mm	Dia60mm
UPL-ADJ4-12W	12W	1356lm	Dia88*H108mm	Dia80mm
UPL-ADJ4-20W	20W	2201lm	Dia110*H130mm	Dia100mm

Function



Adjustable

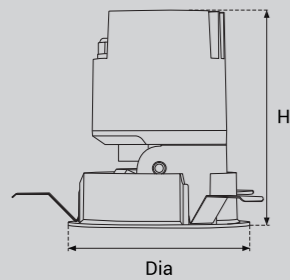


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/40°/Asymmetric
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ4-7W-S	7W	785lm	L65*W65*H84mm	L60*W60mm
UPL-ADJ4-12W-S	12W	1356lm	L88*W88*H108mm	L80*W80mm
UPL-ADJ4-20W-S	20W	2201lm	L110*W110*H130mm	L100*W100mm

Function



Adjustable

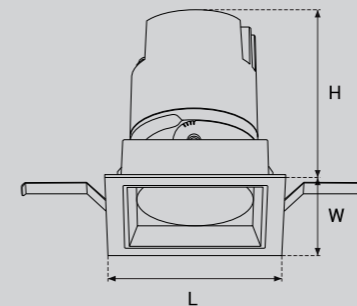




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ5-20W-120mm	20W	2231lm	Dia140*H115mm	Dia120mm
UPL-ADJ5-30W-120mm	30W	3312lm	Dia140*H115mm	Dia120mm
UPL-ADJ5-30W-140mm	30W	3319lm	Dia150*H115mm	Dia140mm
UPL-ADJ5-35W-140mm	35W	3920lm	Dia150*H115mm	Dia140mm
UPL-ADJ5-30W-160mm	30W	3320lm	Dia170*H110mm	Dia160mm
UPL-ADJ5-45W-160mm	45W	5053lm	Dia170*H110mm	Dia160mm
UPL-ADJ5-30W-170mm	30W	3318lm	Dia180*H185mm	Dia170mm
UPL-ADJ5-45W-170mm	45W	5048lm	Dia180*H185mm	Dia170mm

ADJ5 LED DOWNLIGHTS




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ6-30W-130mm	30W	3301lm	Dia140*H115mm	Dia130mm
UPL-ADJ6-35W-130mm	35W	3955lm	Dia140*H115mm	Dia130mm
UPL-ADJ6-30W-145mm	30W	3314lm	Dia160*H170mm	Dia145mm
UPL-ADJ6-45W-145mm	45W	5049lm	Dia160*H170mm	Dia145mm
UPL-ADJ6-30W-160mm	30W	3321lm	Dia170*H125mm	Dia160mm
UPL-ADJ6-45W-160mm	45W	5052lm	Dia170*H180mm	Dia160mm
UPL-ADJ6-45W-185mm	45W	5046lm	Dia195*H135mm	Dia185mm
UPL-ADJ6-55W-185mm	55W	6171lm	Dia195*H135mm	Dia185mm

ADJ6 LED DOWNLIGHTS






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/30°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ7-15W-125mm	15W	1652lm	Dia135*H175mm	Dia125mm
UPL-ADJ7-20W-125mm	20W	2216lm	Dia135*H175mm	Dia125mm
UPL-ADJ7-25W-125mm	25W	2841lm	Dia135*H175mm	Dia125mm
UPL-ADJ7-25W-150mm	25W	2838lm	Dia160*H185mm	Dia150mm
UPL-ADJ7-30W-150mm	30W	3356lm	Dia160*H185mm	Dia150mm
UPL-ADJ7-35W-150mm	35W	3941lm	Dia160*H185mm	Dia150mm

Function



Adjustable



ADJ7 LED DOWNLIGHTS




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/30°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-15W-HD-125mm	15W	1652lm	Dia135*H175mm	Dia125mm
UPL-DL-20W-HD-125mm	20W	2216lm	Dia135*H175mm	Dia125mm
UPL-DL-25W-HD-125mm	25W	2841lm	Dia135*H175mm	Dia125mm
UPL-DL-25W-HD-150mm	25W	2838lm	Dia160*H185mm	Dia150mm
UPL-DL-30W-HD-150mm	30W	3356lm	Dia160*H185mm	Dia150mm
UPL-DL-35W-HD-150mm	35W	3941lm	Dia160*H185mm	Dia150mm



HD LED DOWNLIGHTS




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Function	Retractable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection


Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ8-20W	20W	2215lm	Dia140*H92mm	Dia125mm
UPL-ADJ8-25W	25W	2811lm	Dia140*H92mm	Dia125mm
UPL-ADJ8-30W	30W	3342lm	Dia165*H125mm	Dia155mm
UPL-ADJ8-35W	35W	3944lm	Dia165*H125mm	Dia155mm
UPL-ADJ8-40W	40W	4512lm	Dia195*H144mm	Dia185mm
UPL-ADJ8-50W	50W	5595lm	Dia195*H144mm	Dia185mm

Function

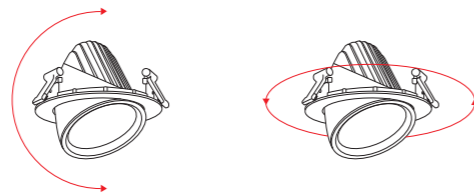

Retractable

Rotatable




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Brown
Reflector color	White/Black/Silver
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-7W-ARCO	7W	795lm	Dia90*H45mm	Dia70-75mm
UPL-DL-10W-ARCO	10W	1146lm	Dia115*65mm	Dia86-90mm
UPL-DL-15W-ARCO	15W	1699lm	Dia130*68mm	Dia105-110mm
UPL-DL-20W-ARCO	20W	2244lm	Dia165*90mm	Dia140-150mm
UPL-DL-30W-ARCO	30W	3393lm	Dia190*95mm	Dia165-175mm
UPL-DL-40W-ARCO	40W	4438lm	Dia190*95mm	Dia165-175mm



Dia

H




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Function	Retractable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection


Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ9-10W	10W	1115lm	Dia95*H70mm	Dia75mm
UPL-ADJ9-15W	15W	1680lm	Dia115*H95mm	Dia100mm
UPL-ADJ9-20W	20W	2252lm	Dia138*H120mm	Dia125mm
UPL-ADJ9-25W	25W	2841lm	Dia138*H120mm	Dia125mm
UPL-ADJ9-30W	30W	3357lm	Dia165*H145mm	Dia150mm
UPL-ADJ9-35W	35W	3890lm	Dia165*H145mm	Dia150mm
UPL-ADJ9-40W	40W	4405lm	Dia190*H165mm	Dia175mm
UPL-ADJ9-50W	50W	5513lm	Dia190*H165mm	Dia175mm

Function

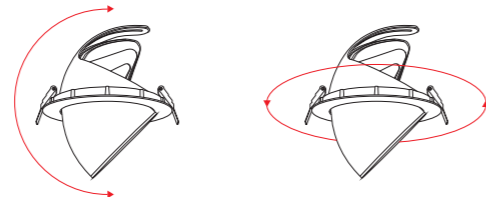

Retractable

Rotatable



ADJ9 LED DOWNLIGHTS




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Function	Retractable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection


Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ9-10W-S	10W	1115lm	L115*W115*H95mm	L100*W100mm
UPL-ADJ9-15W-S	15W	1680lm	L115*W115*H95mm	L100*W100mm
UPL-ADJ9-20W-S	20W	2252lm	L138*W138*H120mm	L125*W125mm
UPL-ADJ9-25W-S	25W	2841lm	L138*W138*H120mm	L125*W125mm
UPL-ADJ9-30W-S	30W	3357lm	L165*W165*H145mm	L150*W150mm
UPL-ADJ9-35W-S	35W	3890lm	L165*W165*H145mm	L150*W150mm

Function

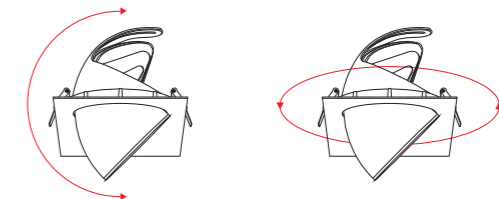

Retractable

Rotatable

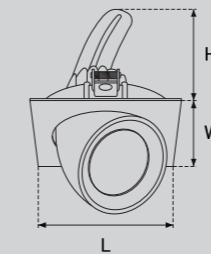

ADJ9 LED DOWNLIGHTS






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Function	Retractable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ9-2x10W-S	2x10W	2215lm	L230*W115*H95mm	L215*W100mm
UPL-ADJ9-2x15W-S	2x15W	3302lm	L230*W115*H95mm	L215*W100mm
UPL-ADJ9-2x20W-S	2x20W	4512lm	L278*W138*H120mm	L265*W125mm
UPL-ADJ9-2x25W-S	2x25W	5682lm	L278*W138*H120mm	L265*W125mm
UPL-ADJ9-2x30W-S	2x30W	6693lm	L330*W165*H145mm	L315*W150mm
UPL-ADJ9-2x35W-S	2x35W	7776lm	L330*W165*H145mm	L315*W150mm


Function



Retractable



Rotatable

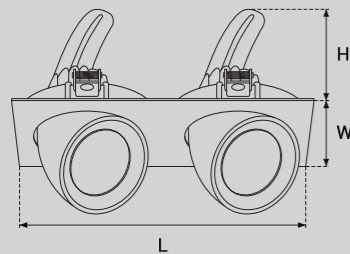


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Function	Retractable & Rotatable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ9-3x10W-S	3x10W	3322lm	L350*W115*H95mm	L335*W100mm
UPL-ADJ9-3x15W-S	3x15W	4948lm	L350*W115*H95mm	L335*W100mm
UPL-ADJ9-3x20W-S	3x20W	6762lm	L417*W138*H120mm	L400*W125mm
UPL-ADJ9-3x25W-S	3x25W	8520lm	L417*W138*H120mm	L400*W125mm
UPL-ADJ9-3x30W-S	3x30W	10032lm	L495*W165*H145mm	L480*W150mm
UPL-ADJ9-3x35W-S	3x35W	11665lm	L495*W165*H145mm	L480*W150mm


Function



Retractable



Rotatable

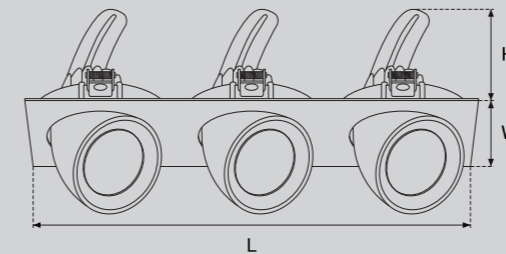

ADJ9 LED DOWNLIGHTS



ADJ9 LED DOWNLIGHTS







Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	30°/45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-30W-135mm-LUNA1	30W	3397lm	Dia145*H106mm	Dia135mm
UPL-DL-40W-135mm-LUNA1	40W	4516lm	Dia145*H125mm	Dia135mm

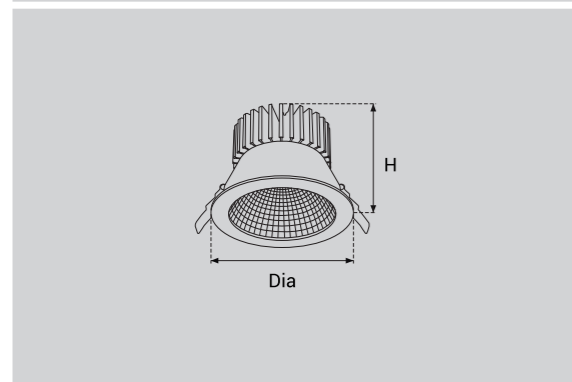
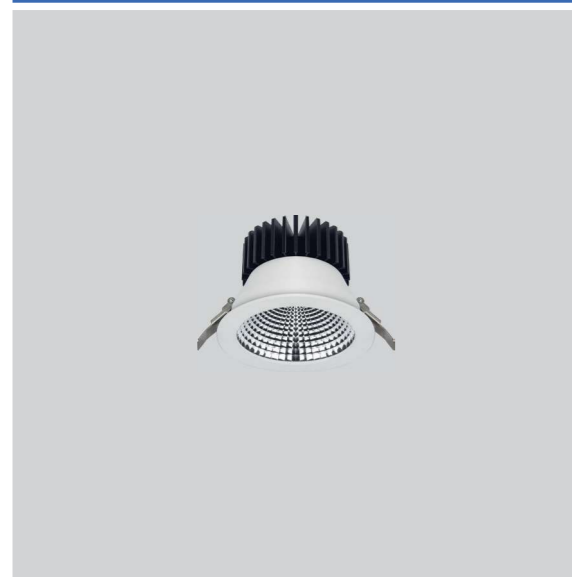


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/30°/45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Beam angle	Dimensions	Hole cutting
UPL-DL-25W-115mm-LUNA2	25W	2817lm	20°/30°/45°	Dia125*H113mm	Dia115mm
UPL-DL-35W-140mm-LUNA2	35W	3911lm	30°/45°	Dia150*H105mm	Dia140mm

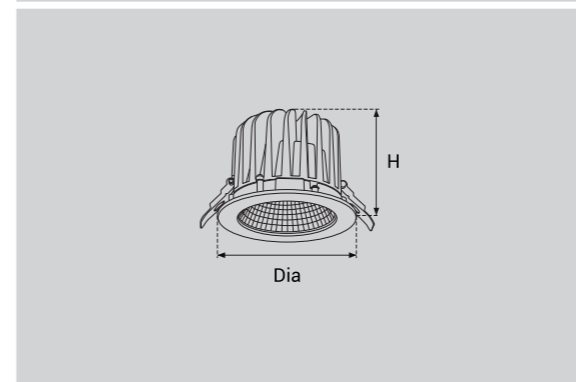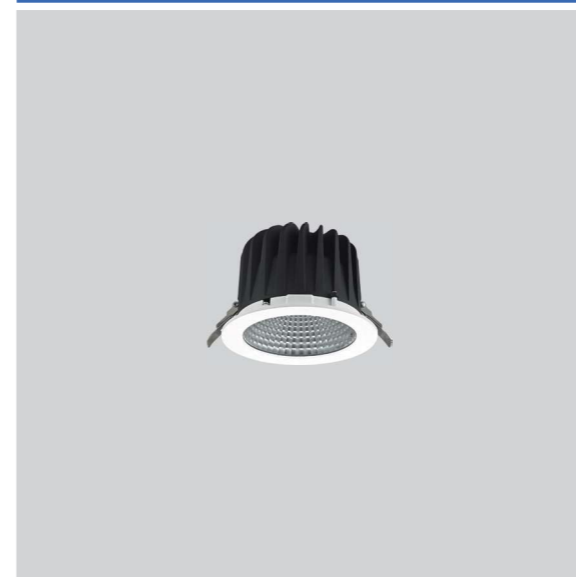




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/30°/45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Beam angle	Dimensions	Hole cutting
UPL-DL-25W-115mm-LUNA3	25W	2717lm	20°/30°/45°	Dia125*H110mm	Dia115mm
UPL-DL-35W-115mm-LUNA3	35W	3811lm	20°/30°/45°	Dia125*H110mm	Dia115mm
UPL-DL-25W-130mm-LUNA3	25W	2721lm	45°	Dia140*H110mm	Dia130mm
UPL-DL-35W-130mm-LUNA3	35W	3815lm	45°	Dia140*H110mm	Dia130mm
UPL-DL-35W-140mm-LUNA3	35W	3810lm	30°/45°	Dia150*H105mm	Dia140mm
UPL-DL-45W-140mm-LUNA3	45W	4983lm	30°/45°	Dia150*H105mm	Dia140mm
UPL-DL-35W-145mm-LUNA3	35W	3810lm	45°	Dia160*H110mm	Dia145mm
UPL-DL-45W-145mm-LUNA3	45W	4983lm	45°	Dia160*H115mm	Dia145mm
UPL-DL-35W-170mm-LUNA3	35W	3810lm	45°	Dia180*H125mm	Dia170mm
UPL-DL-55W-170mm-LUNA3	55W	5995lm	45°	Dia180*H135mm	Dia170mm
UPL-DL-35W-190mm-LUNA3	35W	3810lm	25°/48°	Dia200*H120mm	Dia190mm
UPL-DL-55W-190mm-LUNA3	55W	5995lm	25°/48°	Dia200*H135mm	Dia190mm
UPL-DL-35W-200mm-LUNA3	35W	3810lm	45°	Dia220*H127mm	Dia200-210mm
UPL-DL-45W-200mm-LUNA3	45W	4983lm	45°	Dia220*H135mm	Dia200-210mm
UPL-DL-55W-200mm-LUNA3	55W	5995lm	45°	Dia220*H140mm	Dia200-210mm
UPL-DL-35W-210mm-LUNA3	35W	3811lm	25°/45°	Dia225*H129mm	Dia210mm
UPL-DL-45W-210mm-LUNA3	45W	4983lm	90°	Dia225*H129mm	Dia210mm
UPL-DL-55W-210mm-LUNA3	55W	5985lm	25°/45°	Dia225*H129mm	Dia210mm
UPL-DL-55W-240mm-LUNA3	55W	5995lm	90°	Dia260*H160mm	Dia240mm



LUNA LED DOWNLIGHTS




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/24°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-45W-AP-200	45W	4959lm	Dia230*H190mm	Dia200mm
UPL-DL-55W-AP-200	55W	6096lm	Dia230*H210mm	Dia200mm
UPL-DL-60W-AP-230	60W	6660lm	Dia260*H210mm	Dia230-240mm
UPL-DL-70W-AP-230	70W	7861lm	Dia260*H225mm	Dia230-240mm



AP LED DOWNLIGHTS




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-30W-BH	30W	3368lm	L168*W168*H150mm	L157*W157mm
UPL-GDL-35W-BH	35W	3926lm	L168*W168*H150mm	L157*W157mm
UPL-GDL-45W-BH	45W	4995lm	L168*W168*H150mm	L157*W157mm

GRILLE LED DOWNLIGHT




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-2x30W-BH	2x30W	6678lm	L322*W168*H150mm	L307*W157mm
UPL-GDL-2x35W-BH	2x35W	7762lm	L322*W168*H150mm	L307*W157mm
UPL-GDL-2x45W-BH	2x45W	9981lm	L322*W168*H150mm	L307*W157mm

GRILLE LED DOWNLIGHT






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-3x30W-BH	3x30W	9972lm	L465*W168*H150mm	L457*W157mm
UPL-GDL-3x35W-BH	3x35W	11157lm	L465*W168*H150mm	L457*W157mm
UPL-GDL-3x45W-BH	3x45W	14917lm	L465*W168*H150mm	L457*W157mm

GRILLE LED DOWNLIGHT

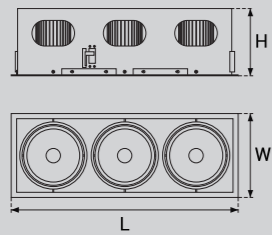


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-30W-190	30W	3368lm	L205*W205*H157mm	L190*W190mm
UPL-GDL-35W-190	35W	3926lm	L205*W205*H157mm	L190*W190mm
UPL-GDL-45W-190	45W	4998lm	L205*W205*H157mm	L190*W190mm

GRILLE LED DOWNLIGHT






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-2x30W-360	2x30W	6678lm	L380*W205*H157mm	L360*W190mm
UPL-GDL-2x35W-360	2x35W	7762lm	L380*W205*H157mm	L360*W190mm
UPL-GDL-2x45W-360	2x45W	9981lm	L380*W205*H157mm	L360*W190mm

GRILLE
LED DOWNLIGHT

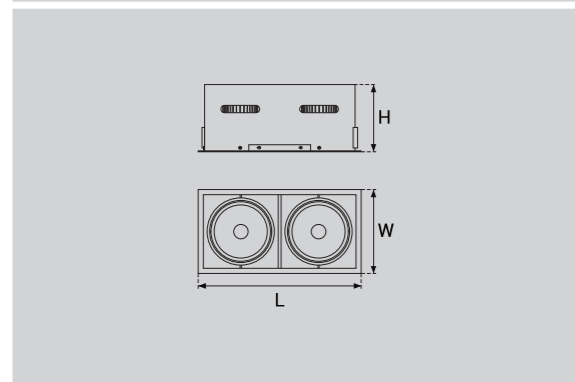


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-3x30W-540	3x30W	9972lm	L557*W205*H157mm	L540*W190mm
UPL-GDL-3x35W-540	3x35W	11157lm	L557*W205*H157mm	L540*W190mm
UPL-GDL-3x45W-540	3x45W	14917lm	L557*W205*H157mm	L540*W190mm



GRILLE
LED DOWNLIGHT

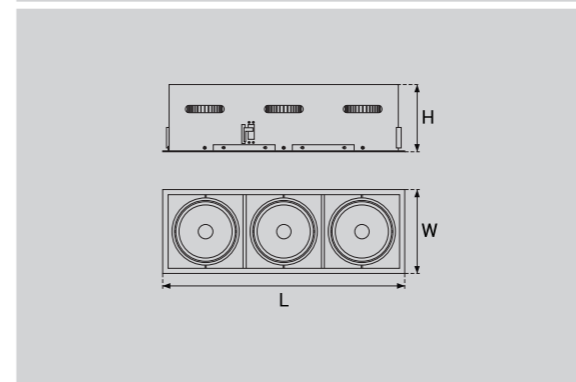



GDL

LED DOWNLIGHT

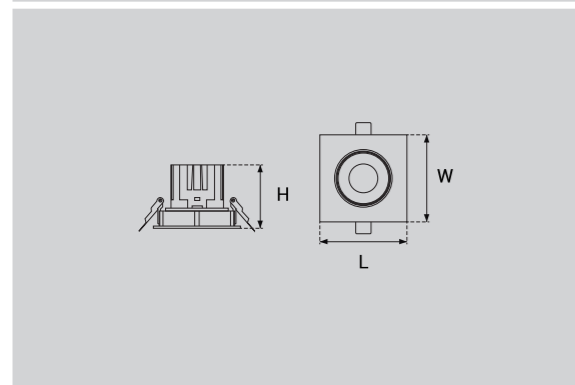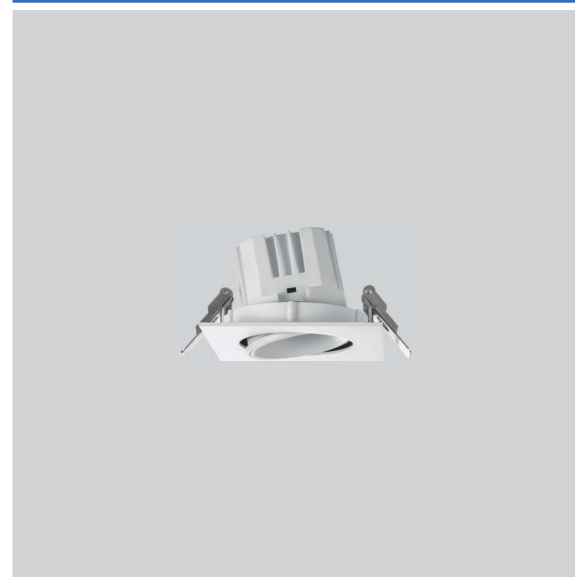



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Reflector color	White/Black
Function	Rotatable 360° & Tilt 30°
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-1x12W-S	1x12W	1363lm	L115*W115*H70mm	L100*W100mm
UPL-GDL-1x20W-S	1x20W	2296lm	L138*W138*H85mm	L125*W125mm
UPL-GDL-1x30W-S	1x30W	3358lm	L163*W163*H97mm	L150*W150mm

Function



Rotatable 360°

Tilt 30°

Accessories




Honey Comb



GDL

LED DOWNLIGHT

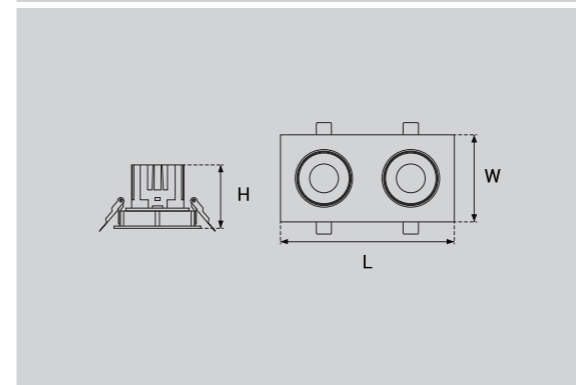



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Reflector color	White/Black
Function	Rotatable 360° & Tilt 30°
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-2x12W-S	2x12W	2684lm	L230*W115*H70mm	L215*W100mm
UPL-GDL-2x20W-S	2x20W	4483lm	L278*W138*H85mm	L263*W125mm
UPL-GDL-2x30W-S	2x30W	6738lm	L330*W163*H97mm	L315*W150mm

Function



Rotatable 360°

Tilt 30°

Accessories



Honey Comb





Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Reflector color	White/Black
Function	Rotatable 360° & Tilt 30°
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-3x12W-S	3x12W	4003lm	L350*W115*H70mm	L335*W100mm
UPL-GDL-3x20W-S	3x20W	6779lm	L417*W138*H85mm	L400*W125mm
UPL-GDL-3x30W-S	3x30W	9976lm	L495*W163*H97mm	L480*W150mm

Function




Rotatable 360°

Tilt 30°

Accessories



Honey Comb

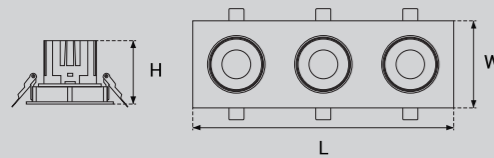

GDL LED DOWNLIGHT





Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Reflector color	White/Black
Function	Rotatable 360° & Tilt 30°
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-GDL-20W-R	20W	2296lm	Dia138*H97mm	Dia125mm
UPL-GDL-30W-R	30W	3358lm	Dia165*H100mm	Dia150mm

Function




Rotatable 360°

Tilt 30°

Accessories



Honey Comb



GDL LED DOWNLIGHT





Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Reflector color	White/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-12W-R	12W	1365lm	Dia85*H70mm	Dia75mm
UPL-DL-20W-R	20W	2296lm	Dia105*H85mm	Dia95mm

Accessories



Honey Comb




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Color rendering index	CRI≥80/90 (CRI97 is available)
Beam angle	Asymmetric
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-ASY-10W	10W	1165lm	Dia85*H70mm	Dia75mm
UPL-DL-ASY-15W	15W	1696lm	Dia85*H70mm	Dia75mm
UPL-DL-ASY-20W	20W	2212lm	Dia108*H85mm	Dia95mm
UPL-DL-ASY-30W	30W	3316lm	Dia135*H97mm	Dia125mm





RECESSED LED SPOTLIGHTS



Technical Parameter


Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-IORS-20W-135	20W	2238lm	L145*W145*H123mm	L135*W135mm
UPL-IORS-25W-135	25W	2785lm	L145*W145*H123mm	L135*W135mm
UPL-IORS-30W-145	30W	3362lm	L160*W160*H137mm	L145*W145mm
UPL-IORS-35W-145	35W	3920lm	L160*W160*H137mm	L145*W145mm
UPL-IORS-40W-155	40W	4478lm	L170*W170*H162mm	L155*W155mm
UPL-IORS-45W-155	45W	5001lm	L170*W170*H162mm	L155*W155mm



RECESSED LED SPOTLIGHTS

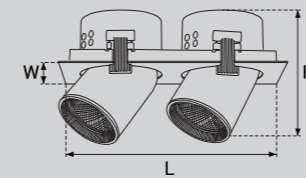

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-IORS-2x20W-260	2x20W	4475lm	L275*W145*H123mm	L260*W135mm
UPL-IORS-2x25W-260	2x25W	2612lm	L275*W145*H123mm	L260*W135mm
UPL-IORS-2x30W-280	2x30W	6731lm	L300*W160*H137mm	L280*W145mm
UPL-IORS-2x35W-280	2x35W	7737lm	L300*W160*H137mm	L280*W145mm
UPL-IORS-2x40W-310	2x40W	8920lm	L325*W170*H162mm	L310*W155mm
UPL-IORS-2x45W-310	2x45W	9996lm	L325*W170*H162mm	L310*W155mm




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black/Grey
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-IORS-20W-130mm	20W	2216lm	Dia140*H170mm	Dia130mm
UPL-IORS-25W-130mm	25W	2772lm	Dia140*H170mm	Dia130mm
UPL-IORS-20W-135mm	20W	2218lm	Dia145*H125mm	Dia135mm
UPL-IORS-25W-135mm	25W	2770lm	Dia145*H125mm	Dia135mm
UPL-IORS-30W-145mm	30W	3328lm	Dia160*H178mm	Dia145mm
UPL-IORS-35W-145mm	35W	3889lm	Dia160*H178mm	Dia145mm
UPL-IORS-30W-150mm	30W	3326lm	Dia160*H135mm	Dia150mm
UPL-IORS-35W-160mm	35W	3892lm	Dia170*H160mm	Dia160mm

**RECESSED
LED SPOTLIGHTS**

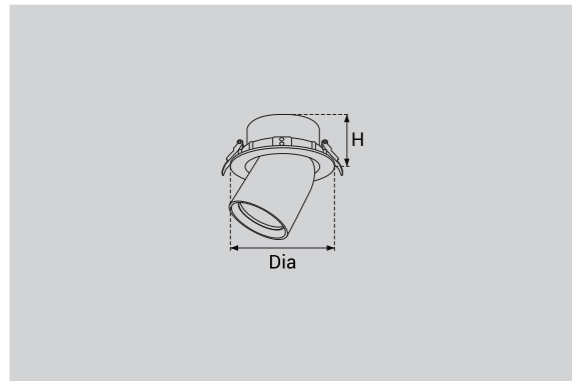



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/OSRAM COB LEDs
LED drivers	PHILIPS/OSRAM
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/25°/45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-CL-7W-CAM-R	7W	805lm	Dia65*H45mm	Dia55mm
UPL-CL-12W-CAM-R	12W	1324lm	Dia85*H58mm	Dia75mm

**CAM
LED CEILING LIGHTS**

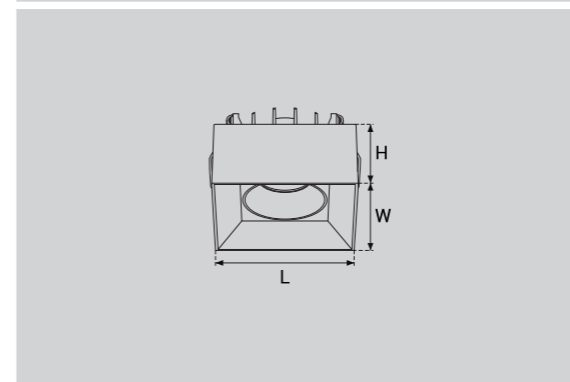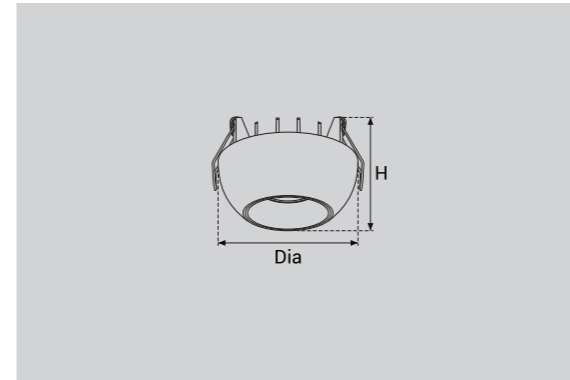

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-CL-7W-CAM-S	7W	805lm	L65*W65*H65mm	L55*W55mm
UPL-CL-12W-CAM-S	12W	1324lm	L85*W85*H65mm	L75*W75mm




RAINBOW LED DOWNLIGHT

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Reflector color	White/Black/Silver/Golden/Mirror
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-3"-RAINBOW-10W	10W	1152lm	Dia100*H75mm	Dia90mm
UPL-DL-4"-RAINBOW-20W	20W	2216lm	Dia140*H90mm	Dia130mm
UPL-DL-6"-RAINBOW-30W	30W	3329lm	Dia190*H105mm	Dia170-175mm
UPL-DL-6"-RAINBOW-35W	35W	3928lm	Dia190*H105mm	Dia170-175mm
UPL-DL-8"-RAINBOW-40W	40W	4439lm	Dia230*H128mm	Dia200mm
UPL-DL-8"-RAINBOW-45W	45W	5012lm	Dia230*H128mm	Dia200mm




ELEGANT LED DOWNLIGHT

Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Reflector color	White/Black/Silver/Shiny
Lumens	120-130LM/W
CCT	3000K/4000K/5000K
Beam angle	90°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-SMD-ELEGANT 2.5F-10W	10W	1219lm	Dia90*H56mm	Dia75mm
UPL-DL-SMD-ELEGANT 3F-15W	15W	1819lm	Dia110*H68mm	Dia90mm
UPL-DL-SMD-ELEGANT 4F-20W	20W	2432lm	Dia138*H82mm	Dia120mm
UPL-DL-SMD-ELEGANT 5F-25W	25W	3027lm	Dia165*H91mm	Dia140-145mm
UPL-DL-SMD-ELEGANT 6F-30W	30W	3630lm	Dia195*H107mm	Dia170-175mm
UPL-DL-SMD-ELEGANT 6F-35W	35W	4249lm	Dia195*H107mm	Dia170-175mm
UPL-DL-SMD-ELEGANT 8F-45W	45W	5422lm	Dia235*H128mm	Dia200mm






Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black/Grey
Reflector color	White/Black/Silver/Mirror
Lumens	120-130LM/W
CCT	3000K/4000K/5000K
Beam angle	110°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-SMD-2"-V5-5W	5W	625lm	Dia80*H40mm	Dia75mm
UPL-DL-SMD-3"-V5-7W	7W	872lm	Dia95*H47mm	Dia85mm
UPL-DL-SMD-3.5"-V5-10W	10W	1246lm	Dia113*H55mm	Dia100mm
UPL-DL-SMD-4"-V5-12W	12W	1489lm	Dia130*H64mm	Dia120mm
UPL-DL-SMD-5"-V5-15W	15W	1860lm	Dia165*H74mm	Dia140-145mm
UPL-DL-SMD-6"-V5-20W	20W	2467lm	Dia195*H85mm	Dia170-175mm
UPL-DL-SMD-8"-V5-30W	30W	3683lm	Dia228*H97mm	Dia200-210mm

V5 LED SPOTLIGHTS




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-4"-DRUM-15W	15W	1665lm	Dia140*H90mm	Dia120mm
UPL-DL-4"-DRUM-20W	20W	2243lm	Dia140*H90mm	Dia120mm
UPL-DL-4"-DRUM-25W	25W	2805lm	Dia140*H90mm	Dia120 mm
UPL-DL-5"-DRUM-20W	20W	2247lm	Dia170*H100mm	Dia150-155mm
UPL-DL-5"-DRUM-30W	30W	3357lm	Dia170*H100mm	Dia150-155mm
UPL-DL-5"-DRUM-35W	35W	3885lm	Dia170*H100mm	Dia150-155mm
UPL-DL-6"-DRUM-25W	25W	2801lm	Dia190*H105mm	Dia170-175mm
UPL-DL-6"-DRUM-30W	30W	3359lm	Dia190*H105mm	Dia170-175mm
UPL-DL-6"-DRUM-35W	35W	3880lm	Dia190*H105mm	Dia170-175mm
UPL-DL-8"-DRUM-30W	30W	3357lm	Dia225*H95mm	Dia200mm
UPL-DL-8"-DRUM-40W	40W	4439lm	Dia225*H95mm	Dia200mm
UPL-DL-8"-DRUM-55W	55W	6096lm	Dia225*H95mm	Dia200mm

SUNFLOWER LED DOWNLIGHT






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Reflector color	Silver/Mirror
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-10W-PLUS	10W	1145lm	Dia115*H65mm	Dia100mm
UPL-DL-15W-PLUS	15W	1707lm	Dia140*H80mm	Dia125mm
UPL-DL-20W-PLUS	20W	2272lm	Dia140*H80mm	Dia125mm
UPL-DL-25W-PLUS	25W	2795lm	Dia160*H85mm	Dia145mm
UPL-DL-30W-PLUS	30W	3390lm	Dia160*H85mm	Dia145mm
UPL-DL-35W-PLUS	35W	3984lm	Dia198*H98mm	Dia175-180mm
UPL-DL-40W-PLUS	40W	4496lm	Dia198*H98mm	Dia175-180mm
UPL-DL-45W-PLUS	45W	5040lm	Dia230*H102mm	Dia210-215mm
UPL-DL-50W-PLUS	50W	5590lm	Dia230*H102mm	Dia210-215mm

PLUS LED DOWNLIGHT





Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Reflector color	Silver/Mirror
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-10W-MONO	10W	1145lm	L115*W115*H60mm	L100*W100mm
UPL-DL-15W-MONO	15W	1707lm	L140*W140*H75mm	L125*W125mm
UPL-DL-20W-MONO	20W	2272lm	L140*W140*H75mm	L125*W125mm
UPL-DL-25W-MONO	25W	2795lm	L160*W160*H80mm	L145*W145mm
UPL-DL-30W-MONO	30W	3390lm	L160*W160*H80mm	L145*W145mm
UPL-DL-35W-MONO	35W	3984lm	L195*W195*H95mm	L180*W180mm
UPL-DL-40W-MONO	40W	4496lm	L195*W195*H95mm	L180*W180mm

MONO LED DOWNLIGHT






Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Tilt 30°
Waterproof Grade	IP65
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	24°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-TEC	6W	693lm	Dia83*H68mm	Dia75mm
UPL-10W-TEC	10W	1125lm	Dia100*H77mm	Dia95mm
UPL-15W-TEC	15W	1699lm	Dia100*H77mm	Dia95mm

Function



TEC LED DOWNLIGHT




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Waterproof Grade	IP65
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	24°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-6W-ISO	6W	693lm	Dia70*H64mm	Dia65mm
UPL-10W-ISO	10W	1125lm	Dia92*H73mm	Dia85mm
UPL-15W-ISO	15W	1699lm	Dia92*H73mm	Dia85mm



ISO LED DOWNLIGHT




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black/Grey
Function	3CCT Adjustable 3000K-4000K-6000K (15W/20W/24W)
Lumens	110-120LM/W
CCT	3000K/4000K/5000K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-7W-MF	7W	872lm	Dia125*H54mm	Dia100mm
UPL-DL-12W-MF	12W	1492lm	Dia140*H48mm	Dia125mm
UPL-DL-15W-MF	15W	1861lm	Dia170*H48mm	Dia145mm
UPL-DL-20W-MF	20W	2447lm	Dia190*H58mm	Dia165-175mm
UPL-DL-24W-MF	24W	2936lm	Dia230*H58mm	Dia200-210mm

Function



15W/20W/24W



MF
LED DOWNLIGHT





Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black/Grey
Function	3CCT Adjustable
Lumens	120-130LM/W
CCT	3000K/4200K/5700K
Beam angle	110°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-MG-6"-20W	20W	2421lm	Dia190*H59mm	Dia160-170mm
UPL-DL-MG-8"-30W	30W	3659lm	Dia230*H72mm	Dia195-210mm

Function



MG
LED DOWNLIGHT





Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	3000K/4200K/5700K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-TD-COB-3.5"-10W	10W	1149lm	Dia118*H57mm	Dia90mm
UPL-TD-COB-4"-12W	12W	1372lm	Dia138*H60mm	Dia115-120mm
UPL-TD-COB-5"-15W	15W	1705lm	Dia178*H70mm	Dia155-160mm
UPL-TD-COB-6"-20W	20W	2226lm	Dia190*H78mm	Dia160-175mm
UPL-TD-COB-6"-25W	25W	2812lm	Dia190*H78mm	Dia160-175mm
UPL-TD-COB-8"-30W	30W	3360lm	Dia240*H93mm	Dia200-220mm
UPL-TD-COB-8"-35W	35W	3909lm	Dia240*H930mm	Dia200-220mm

TD COB LED DOWNLIGHT

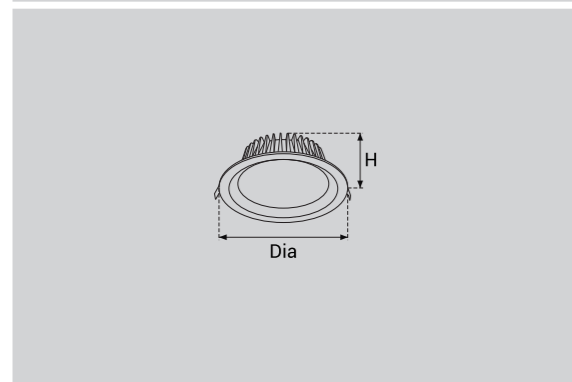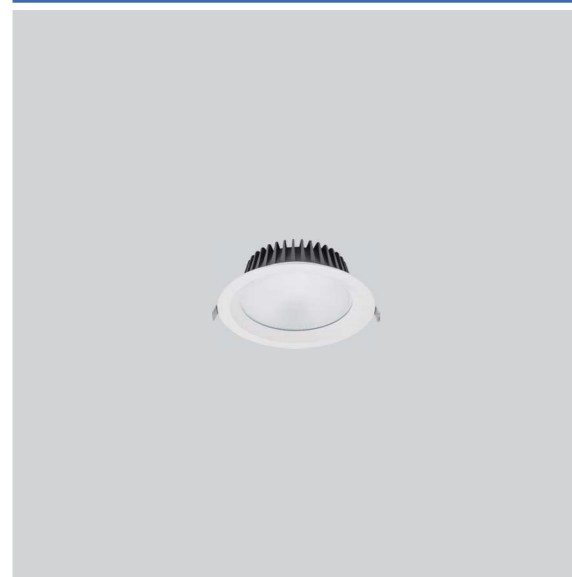


Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	120-130LM/W
CCT	3000K/4200K/5700K
Beam angle	110°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-TD-SMD-3.5"-10W	10W	1253lm	Dia118*H57mm	Dia90mm
UPL-TD-SMD-4"-12W	12W	1512lm	Dia138*H60mm	Dia115-120mm
UPL-TD-SMD-5"-15W	15W	1866lm	Dia178*H70mm	Dia155-160mm
UPL-TD-SMD-6"-20W	20W	2480lm	Dia190*H78mm	Dia160-175mm
UPL-TD-SMD-6"-25W	25W	3087lm	Dia190*H78mm	Dia160-175mm
UPL-TD-SMD-8"-30W	30W	3691lm	Dia240*H93mm	Dia200-220mm
UPL-TD-SMD-8"-35W	35W	4283lm	Dia240*H930mm	Dia200-220mm

TD SMD LED DOWNLIGHT

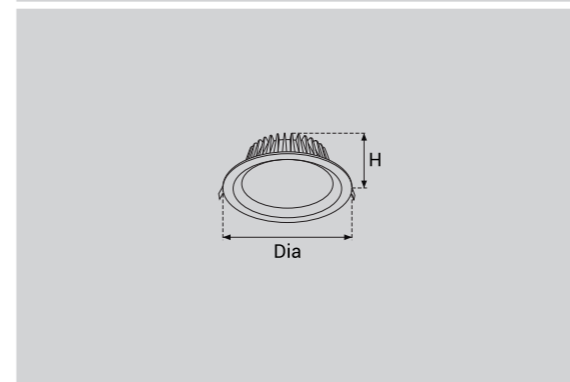




Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White
Function	CCT Adjustable 3000K-6000K (15W)
Lumens	120-130LM/W
CCT	3000K/4000K/5000K
Beam angle	120°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-COMFORT-7W	7W	868lm	Dia83*H43mm	Dia75mm
UPL-DL-COMFORT-10W	10W	1235lm	Dia103*H50mm	Dia95mm
UPL-DL-COMFORT-15W	15W	1846lm	Dia133*H120mm	Dia120mm

COMFORT LED DOWNLIGHT




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Grey/Black
Reflector color	Golden/Black/Silver
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/30°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-15W-TUBE	15W	1679lm	Dia53*H130*P100mm	Dia45mm
UPL-DL-25W-TUBE	25W	2826lm	Dia73*H150*P120mm	Dia55mm
UPL-DL-35W-TUBE	35W	3921lm	Dia90*H170*P140mm	Dia75mm

TUBE LED SPOTLIGHTS

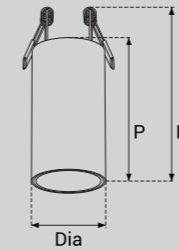



Technical Parameter


Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Tilt 30°/Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	24°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-10W-A	10W	1125lm	Dia84*H58mm	Dia70-75mm


Function

1800K 3000K



Dim-to-warm (Optional)

Tilt 30°



HOTEL
LED DOWNLIGHT



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Tilt 30°/Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	24°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-10W-B	10W	1125lm	Dia84*H62mm	Dia70-75mm

Function

1800K 3000K

Dim-to-warm (Optional)



HOTEL
LED DOWNLIGHT



Technical Parameter


Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Tilt 30°/Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	24°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-10W-C	10W	1125lm	Dia84*H58mm	Dia70-75mm


Function

1800K 3000K



Dim-to-warm (Optional)

Tilt 30°



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Tilt 30°/Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	24°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-10W-D	10W	1125lm	Dia80*H70mm	Dia70-75mm


Function

1800K 3000K



Dim-to-warm (Optional)

Tilt 30°





Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Tilt 30°/Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	24°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-10W-E	10W	1125lm	Dia80*H70mm	Dia70-75mm


Function

1800K 3000K



Dim-to-warm (Optional)

Tilt 30°



HOTEL
LED DOWNLIGHT



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Function	Tilt 30°/Dim-to-warm (Optional)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	24°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-ADJ-10W-F	10W	1125lm	Dia80*H70mm	Dia70-75mm

Function

1800K 3000K



Dim-to-warm (Optional)



HOTEL
LED DOWNLIGHT



REFLEX LED DOWNLIGHT

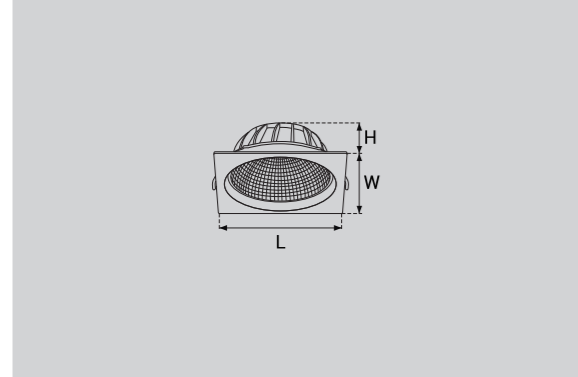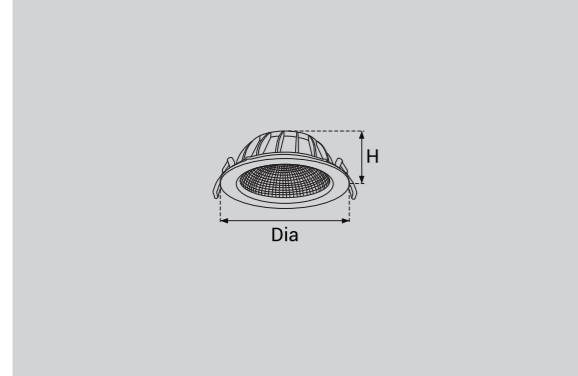

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection


Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-REFLEX-10W	10W	1148lm	Dia110*H40mm	Dia100mm
UPL-DL-REFLEX-15W	15W	1695lm	Dia140*H50mm	Dia130mm
UPL-DL-REFLEX-20W	20W	2210lm	Dia170*H55mm	Dia160mm
UPL-DL-REFLEX-25W	25W	2815lm	Dia195*H60mm	Dia175mm
UPL-DL-REFLEX-30W	30W	3326lm	Dia230*H65mm	Dia210mm
UPL-DL-REFLEX-35W	35W	3927lm	Dia260*H70mm	Dia240-245mm

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-REFLEX-10W-S	10W	1148lm	L110*W110*H60mm	L100*W100mm
UPL-DL-REFLEX-15W-S	15W	1695lm	L140*W140*H70mm	L130*W130mm
UPL-DL-REFLEX-20W-S	20W	2210lm	L170*W170*H75mm	L160*W160mm
UPL-DL-REFLEX-25W-S	25W	2815lm	L190*W190*H80mm	L175*W175mm
UPL-DL-REFLEX-30W-S	30W	3326lm	L230*W230*H85mm	L210*W210mm
UPL-DL-REFLEX-35W-S	35W	3927lm	L260*W260*H90mm	L240*W240mm



COB RECTANGULAR LED DOWNLIGHT

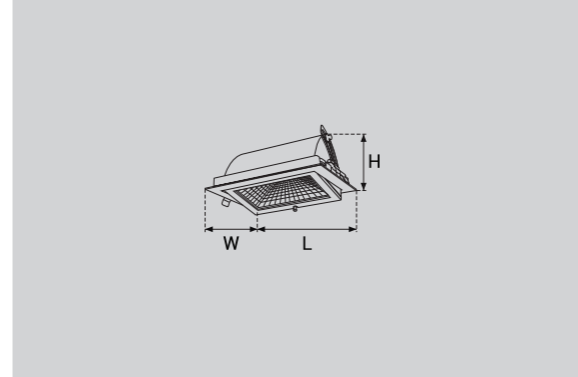

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Grey/Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-20W-RT-COB	20W	2236lm	L175*W133*H88mm	L165*W120mm
UPL-DL-30W-RT-COB	30W	3354lm	L175*W133*H88mm	L165*W120mm
UPL-DL-40W-RT-COB	40W	4478lm	L222*W157*H100mm	L210*W140mm
UPL-DL-45W-RT-COB	45W	5053lm	L222*W157*H100mm	L210*W140mm



CATERPILLAR LED DOWNLIGHTS



UPL-WW-2W-1H



UPL-WW-4W-2H



UPL-WW-10W-5H



UPL-WW-20W-10H



UPL-WW-30W-15H

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE 3535
LED drivers	KEGU/EAGLERISE
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Grey
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/30°/45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-WW-2W-1H	2W	229lm	L45*W45*H49mm	L37*W37mm
UPL-WW-4W-2H	4W	462lm	L75*W45*H49mm	L68*W37mm
UPL-WW-10W-5H	10W	1155lm	L147*W45*H49mm	L140*W37mm
UPL-WW-20W-10H	20W	2307lm	L280*W45*H49mm	L273*W37mm
UPL-WW-30W-15H	30W	3396lm	L415*W45*H49 mm	L405*W37mm



CATERPILLAR LED DOWNLIGHTS



UPL-WW-4W-2H



UPL-WW-10W-5H



UPL-WW-20W-10H



UPL-WW-30W-15H

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE 3535
LED drivers	PHILIPS/OSRAM/KEGU
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/30°/45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-WW-1x20W-1x10H	20W	2289lm	L311*W104*H96mm	L195*W90mm
UPL-WW-1x30W-1x15H	30W	3420lm	L444*W104*H96mm	L425*W145mm
UPL-WW-2x20W-2x10H	2x20W	4523lm	L311*W159*H96mm	L295*W90mm
UPL-WW-2x30W-2x15H	2x30W	6785lm	L444*W159*H96mm	L425*W145mm



CATERPILLAR

LED DOWNLIGHTS



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE 3535
LED drivers	PHILIPS/OSRAM/KEGU
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/30°/45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-WW-2W-1H-Frameless	2W	231lm	L72*W41*H49mm	L42*W41mm
UPL-WW-4W-2H-Frameless	4W	453lm	L71*W72*H49mm	L72*W41mm
UPL-WW-10W-5H-Frameless	10W	1162lm	L141*W72*H49mm	L145*W41mm
UPL-WW-20W-10H-Frameless	20W	2313lm	L274*W72*H49mm	L277*W41mm
UPL-WW-30W-15H-Frameless	30W	3496lm	L406*W72*H49mm	L410*W41mm



V2 CATERPILLAR

LED DOWNLIGHTS



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE 5050
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/24°/38°/48°/48°x48°/70°x70°/35°x70°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-WW-4W-1H-V2	4W	460lm	L54*W54*H50mm	L49*W49mm
UPL-WW-12W-3H-V2	12W	1353lm	L130*W54*H52mm	L125*W49mm
UPL-WW-15W-2X2H-V2	15W	1705lm	L92*W92*H52mm	L87*W87mm
UPL-WW-20W-5H-V2	20W	2298lm	L206*W54*H52mm	L201*W49mm
UPL-WW-36W-3X3H-V2	36W	4146lm	L130*W130*H52mm	L125*W125mm
UPL-WW-40W-10H-V2	40W	4652lm	L396*W54*H52mm	L390*W49mm



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE 5050
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/24°/38°/48°/48°x48°/70°x70°/35°x70°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-WW-15W-SM-2X2H-V2	15W	1705lm	L82*W82*H80mm	
UPL-WW-36W-SM-3X3H-V2	36W	4146lm	L120*W120*H90mm	

SURFACE CATERPILLAR LED DOWNLIGHTS



UPL-WW-4W-1H-V2



UPL-WW-12W-3H-V2



V3 CATERPILLAR LED DOWNLIGHTS



UPL-WW-3W-2H-V3



UPL-WW-5W-3H-V3




UPL-WW-8W-2X2H-V3



UPL-WW-10W-6H-V2



UPL-WW-15W-3X3H-V3



UPL-WW-20W-12H-V3

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE 5050
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/24°/38°/48°/48°x48°/70°x70°/35°x70°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-WW-3W-2H-V3	3W	349lm	L52*W32*H40mm	L48*W27mm
UPL-WW-5W-3H-V3	5W	568lm	L63*W32*H40mm	L57*W27mm
UPL-WW-8W-2X2H-V3	8W	906lm	L52*W52*H40mm	L48*W48mm
UPL-WW-10W-6H-V2	10W	1156lm	L108*W32*H40mm	L104*W27mm
UPL-WW-15W-3X3H-V3	15W	1699lm	L71*W71*H40mm	L68*W68mm
UPL-WW-20W-12H-V3	20W	2296lm	L204*W32*H40mm	L200*W27mm



V4 CATERPILLAR LED DOWNLIGHTS



UPL-WW-8W-3H-V4



UPL-WW-15W-6H-V4



UPL-WW-24W-12H-V4

Technical Parameter


Input voltage	AC230V 50HZ
Light source	OSRAM 3030
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Black
Reflector color	Golden/Black
Waterproof Grade	IP44
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	20°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-WW-8W-3H-V4	8W	942lm	L95*W45*H49mm	L87*W37mm
UPL-WW-15W-6H-V4	15W	1686lm	L175*W45*H49mm	L165*W37mm
UPL-WW-24W-12H-V4	24W	2712lm	L333*W45*H49mm	L325*W37mm



CATERPILLAR LED DOWNLIGHTS



UPL-WW-10W-5H-ASY



UPL-WW-20W-10H-ASY



UPL-WW-30W-15H-ASY

Technical Parameter

Input voltage	AC230V 50HZ
Light source	PHILIPS 3030
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White+Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	Asymmetric 60°x90°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours



Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-WW-10W-5H-ASY	10W	1123lm	L147*W45*H49 mm	L140*W37mm
UPL-WW-20W-10H-ASY	20W	2319lm	L280*W45*H49 mm	L272*W37mm
UPL-WW-30W-15H-ASY	30W	3496lm	L413*W45*H49 mm	L405*W37mm



EYE

LED SPOTLIGHTS

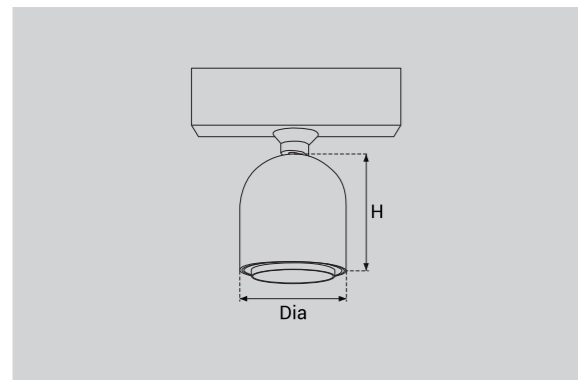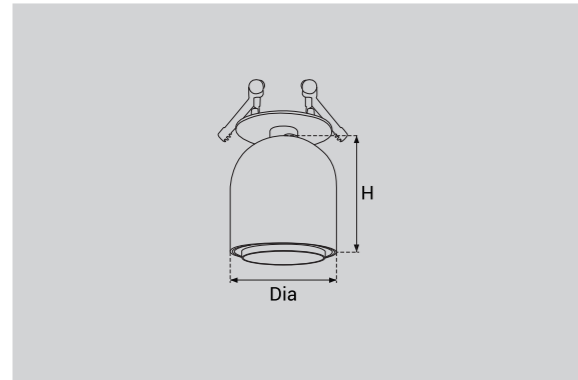

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/25°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions	Hole cutting
UPL-DL-20W-EYE	20W	2245lm	Dia80*H95mm	Dia70mm
UPL-DL-30W-EYE	30W	3319lm	Dia95*H110mm	Dia85mm



Model Selection

Model	Power	Lumens	Dimensions
UPL-DL-20W-EYE-SM	20W	2245lm	Dia80*H95mm
UPL-DL-30W-EYE-SM	30W	3319lm	Dia95*H110mm



MINO

LED DOWNLIGHT

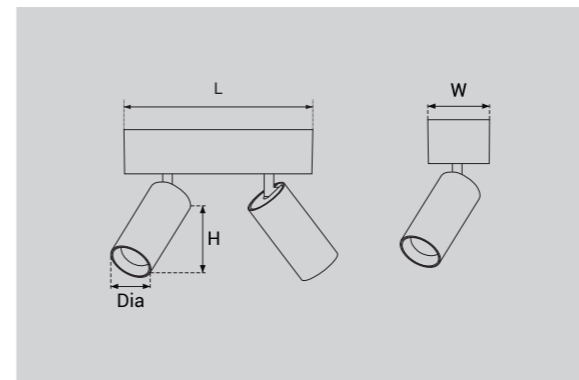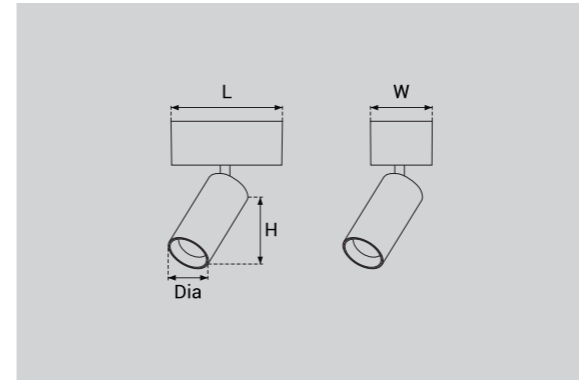

Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Grey/Black
Function	Adjustable
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/25°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection


Model	Power	Lumens	Dimensions	Surface bas
UPL-DL-15W-MINO	15W	1679lm	Dia58*H130mm	L165*H65mm
UPL-DL-20W-MINO	20W	2236lm	Dia66*H135mm	L165*H65mm

Model Selection

Model	Power	Lumens	Dimensions	Surface bas
UPL-DL-2x15W-MINO	2x15W	3302lm	Dia58*H130mm	L280*W65mm
UPL-DL-2x20W-MINO	2x20W	4519lm	Dia66*H135mm	L280*W65mm



V2 SURFACE LED DOWNLIGHT



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Grey/Black
Reflector color	White/Black/Silver/Mirror
Function	Dim-to-warm 1800K-3000K (10W)
Waterproof Grade	IP65
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Color rendering index	CRI≥80/90 (CRI97 is available)
Beam angle	20°/45°
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection


Model	Power	Lumens	Dimensions
UPL-10W-V2	10W	1165lm	Dia75*H100mm
UPL-20W-V2	20W	2220lm	Dia95*H152mm
UPL-30W-V2	30W	3316lm	Dia115*H152mm
UPL-40W-V2	40W	4429lm	Dia140*H162mm
UPL-50W-V2	50W	5625lm	Dia170*H182mm
UPL-60W-V2	60W	6720lm	Dia205*H212mm
UPL-80W-V2	80W	8952lm	Dia205*H212mm

Function

1800K 3000K

Dim-to-warm (10W)

Installation

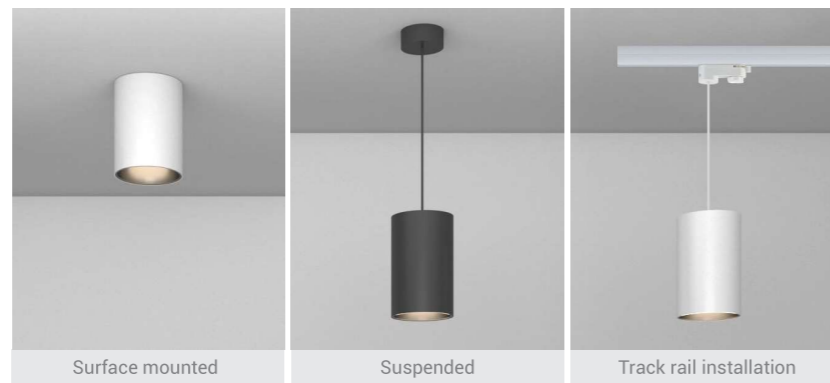


Surface mounted

Suspended

Track rail installation



ADJUSTABLE SURFACE LED DOWNLIGHTS

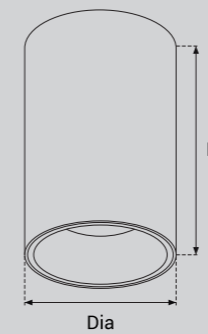


Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN COB LEDs
LED drivers	PHILIPS
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Reflectors color	Silver
Waterproof rated	IP20
Installation	Surface/Suspended/Track rail
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions
UPL-ADJ-12W-Focus	12W	1258lm	Dia75*H150mm
UPL-ADJ-18W-Focus	18W	1866lm	Dia95*H150mm
UPL-ADJ-25W-Focus	25W	2605lm	Dia115*H160mm

Function



Adjustable




Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Black
Function	Dim-to-warm 1800K-3000K (10W)
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Color rendering index	CRI≥80/90 (CRI97 is available)
Beam angle	20°/45°/60°
Material	Die-casting Aluminum
Life-span	50 000 hours


Model Selection

Model	Power	Lumens	Dimensions
UPL-10W-JEWEL	10W	1165lm	L90*W90*H90mm
UPL-20W-JEWEL	20W	2220lm	L110*W110*H120mm
UPL-30W-JEWEL	30W	3316lm	L130*W130*H135mm

Function



JEWEL LED DOWNLIGHT

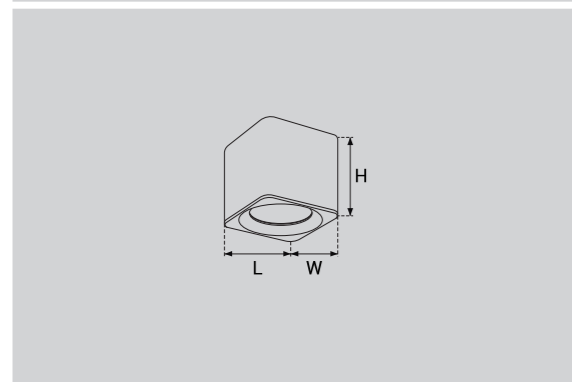



Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Dimming	CASAMBI/ZigBee/Triac/1-10V/DALI
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/36°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection

Model	Power	Lumens	Dimensions
UPL-DL-1x10W-SM	10W	1137lm	L97*W97*H120mm

SURFACE LED DOWNLIGHT

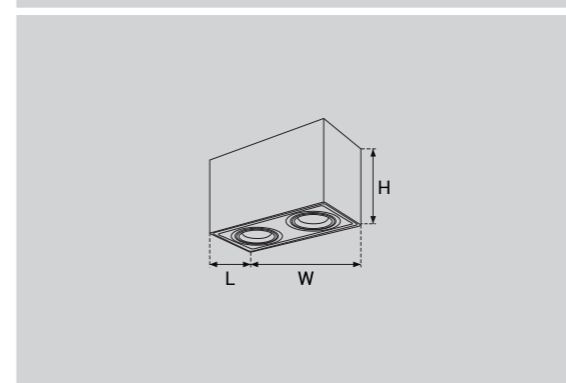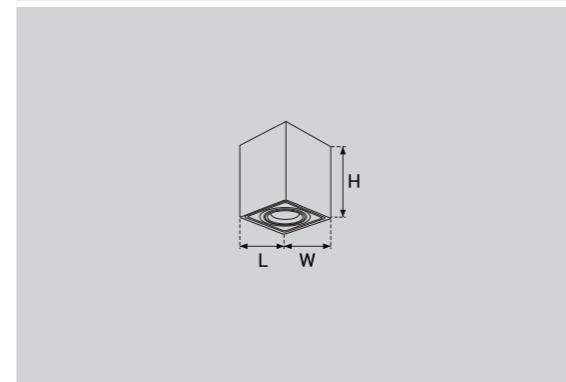

Model Selection

Model	Power	Lumens	Dimensions
UPL-DL-2x10W-SM	20W	2319lm	L127*W97*H120mm