



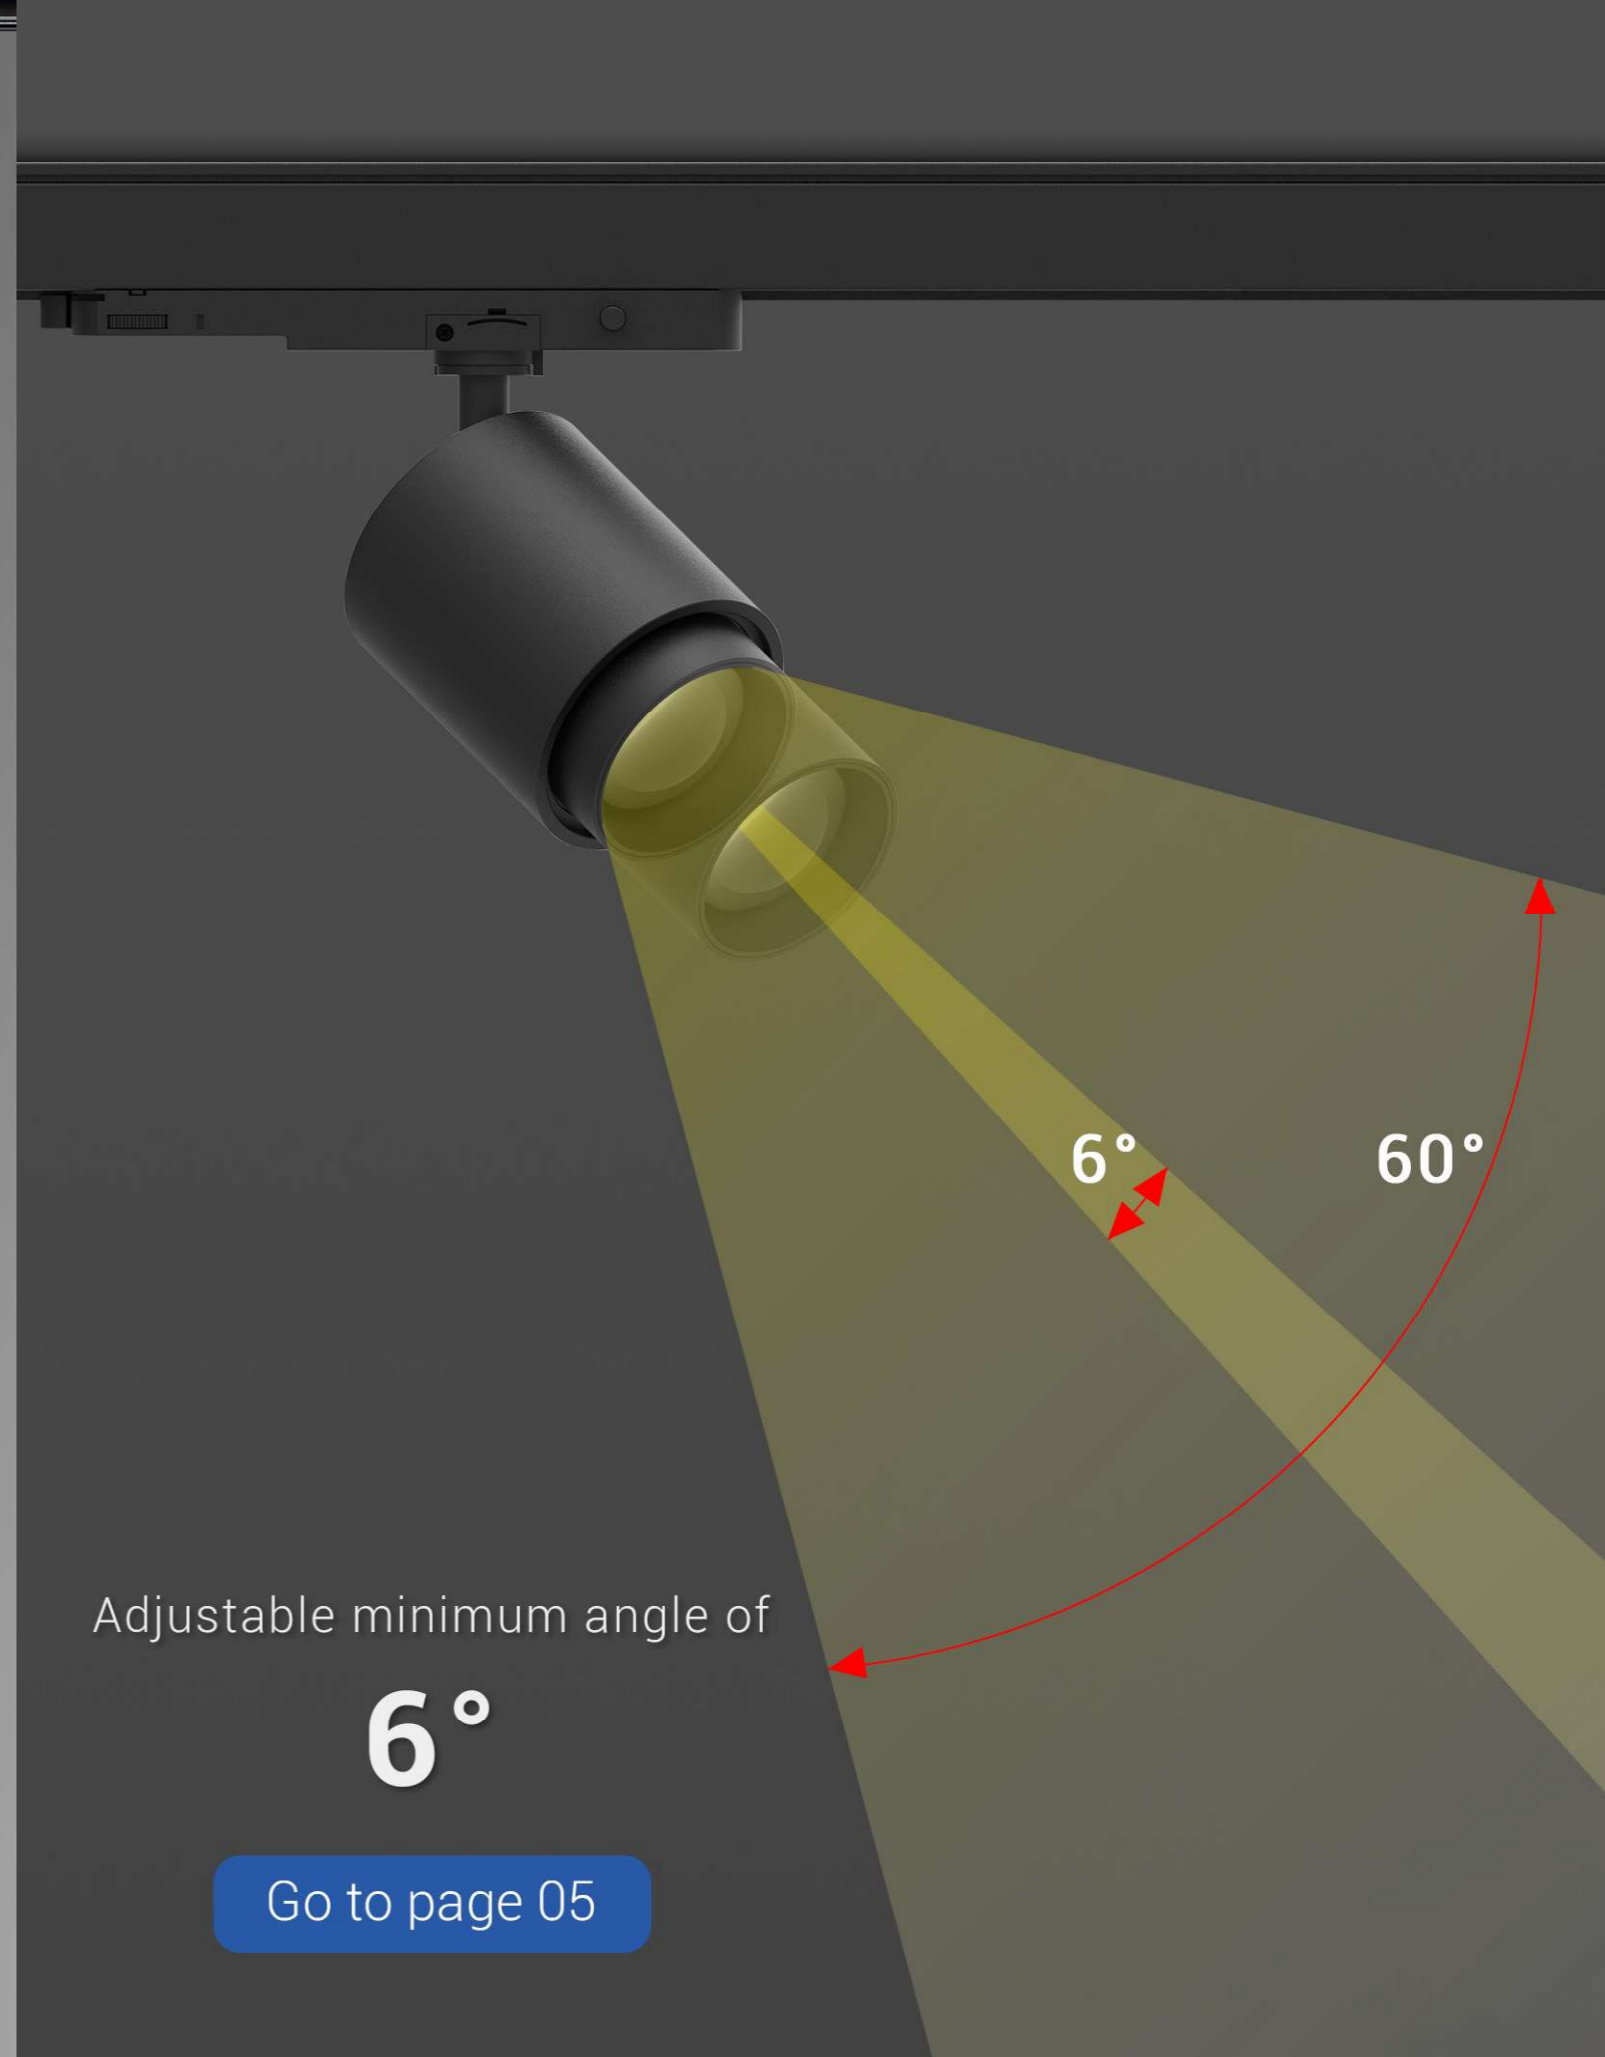

## MUSEUM LIGHTING

[Go to page 06](#)

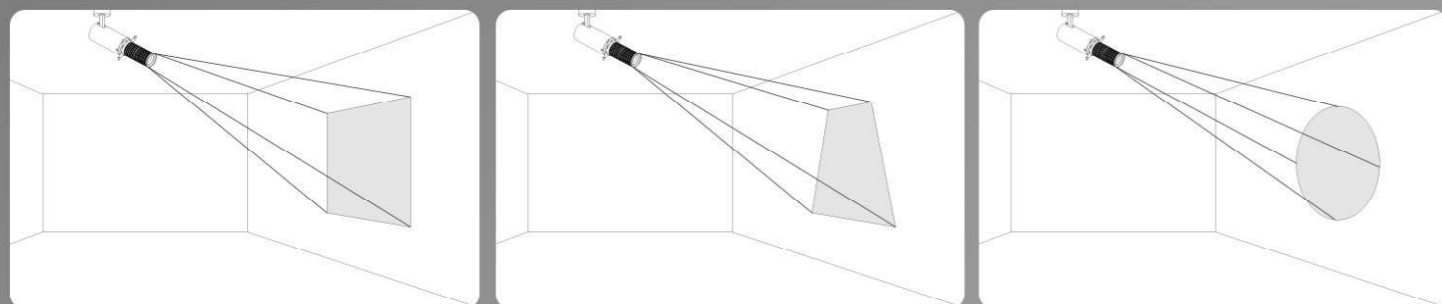

Adjustable minimum angle of  
**6°**


[Go to page 05](#)



# ZOOMABLE TRACK LIGHTS

[Go to page 07](#)


Beam angle Adjustable 15°-60°

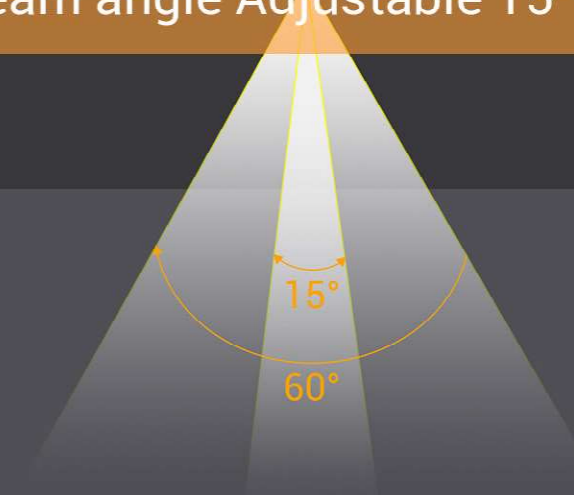

CCT Adjustable 2800K-6000K



Knob Dimming 10%-100%

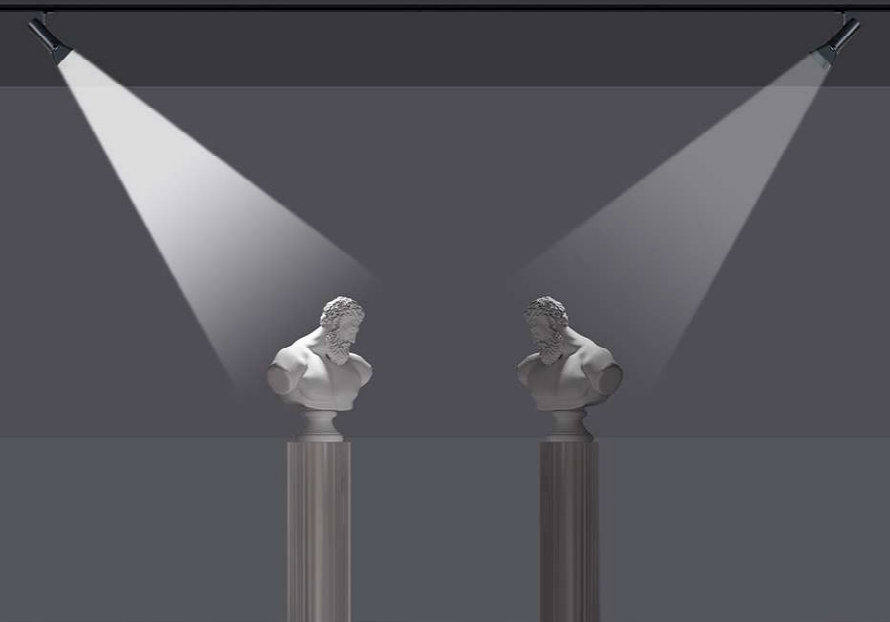

# Contents


## COMPANY PROFILE

P001-P002

## PRODUCTS


P003-026

### LED TRACKLIGHTS

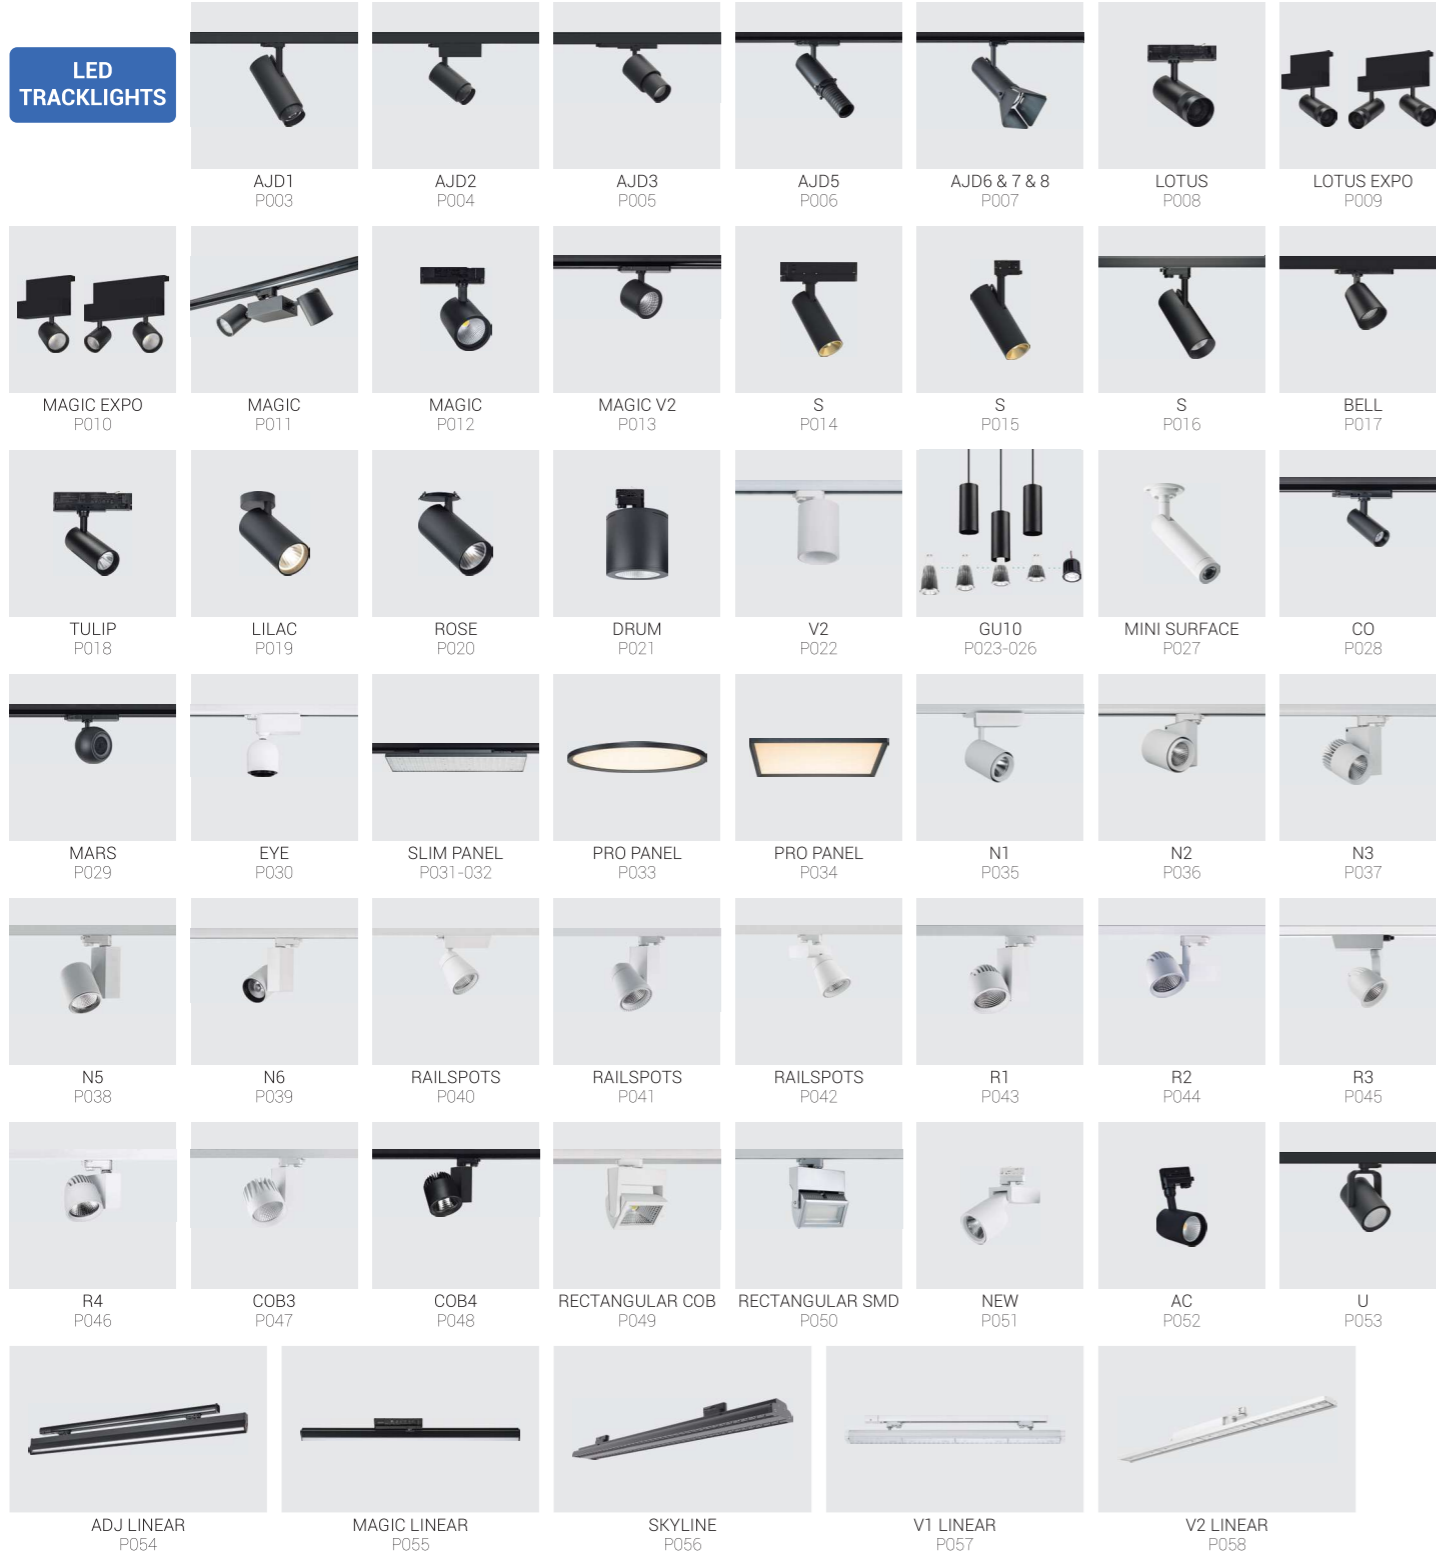

### LED TRACKLIGHTS



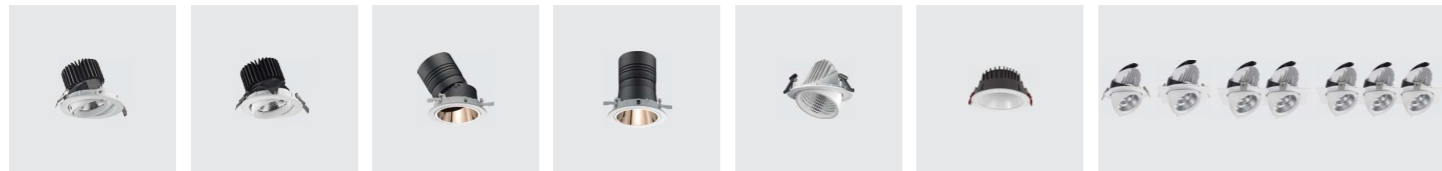

ADJ5  
P129

ADJ6  
P130

ADJ7  
P131

HD  
P132


ADJ8  
P133

ARCO  
P134

ADJ9  
P135-138



LOTUS EXPO  
P139-141



AP  
P142




GRILLE-BH  
P143-145



GRILLE  
P146-148



S  
P149-152



DL  
P153



DL-ASY  
P154



RECESSED  
P155-157




CAM  
P158




RAINBOW  
P159




ELEGANT  
P160



V5  
P161



SUNFLOWER  
P162




PLUS  
P163




MONO  
P164



TEC  
P165



ISO  
P166



MF  
P167



MG  
P168



TD COB  
P169



TD SMD  
P170




COMFORT  
P171



TUBE  
P172



HOTEL-A  
P173



HOTEL-B  
P174



HOTEL-C  
P175



HOTEL-D  
P176



HOTEL-E  
P177



HOTEL-F  
P178



REFLEX  
P179




COB RECTANGULAR  
P180



CATERPILLAR  
P181



CATERPILLAR  
P182

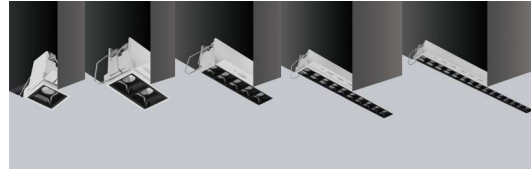


CATERPILLAR  
P183




V2 CATERPILLAR  
P184



SURFACE CATERPILLAR  
P185

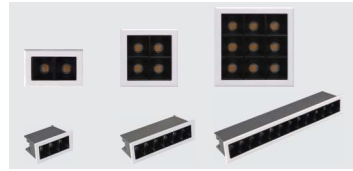

V3 CATERPILLAR  
P186




V4 CATERPILLAR  
P184



CATERPILLAR-ASY  
P188




EYE  
P189



MINO  
P190



V2SURFACE  
P191



ADJUSTABLE SURFACE  
P192



JEWEL  
P193



SURFACE  
P194

LED PLAFONNIER



BULKHEAD  
P195



BULKHEAD  
P196




BULKHEAD  
P197-199


LED WALL LAMP



OUTDOOR  
P200

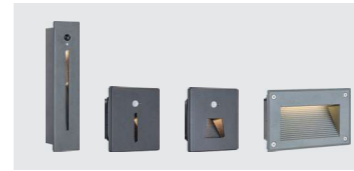

SENSOR CORNER  
P201

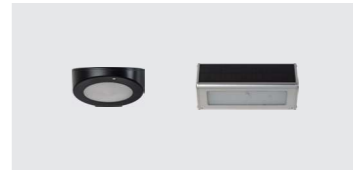

OUTDOOR  
P202

LED OUTDOOR




TUBULAR TRIPROOF  
P203



TP TRIPROOF  
P204



UFO  
P205



UFO V2  
P206



UFO V6  
P207



F  
P208



LINEAR  
P209



LN PANEL  
P210



SMD ASYMMETRIC  
P211



V3  
P212



CONVERTIBLE  
P213



WALL WASHER  
P214



MODULAR  
P215-216



GARDEN LIGHTING  
P217




### Technical Parameter

Input voltage	AC230V 50HZ
Light source	LUMILEDS/CITIZEN COB LEDs
LED drivers	OSRAM
Connection	European Standard 4-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi/Knob
Housing color	White/Black/Grey
Function	Zoomable
Lumens	100-110LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	Adjustable 15°~60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-20W-AJD1	20W	2059lm	Dia71*H169~180mm
UPL-TR-30W-AJD1	30W	3142lm	Dia85*H214~227mm
UPL-TR-35W-AJD1	35W	3675lm	Dia95*H228~245mm


### Beam Angle Adjustable

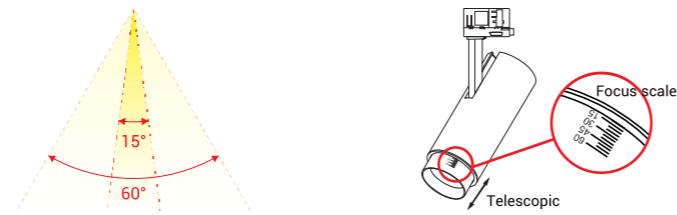

### Optional Accessories



Honeycomb

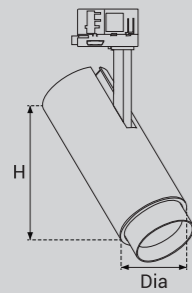


### Technical Parameter

Input voltage	AC230V 50HZ
Light source	LUMILEDS/CITIZEN COB LEDs
LED drivers	OSRAM
Connection	European Standard 4-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi/Knob
Housing color	White/Black/Grey
Function	Zoomable
Lumens	100-110LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	Adjustable 15°~60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-20W-AJD2	20W	2159lm	Dia71*H134~145mm
UPL-TR-30W-AJD2	30W	3142lm	Dia85*H152~165mm
UPL-TR-35W-AJD2	35W	3675lm	Dia95*H158~175mm



### Beam Angle Adjustable

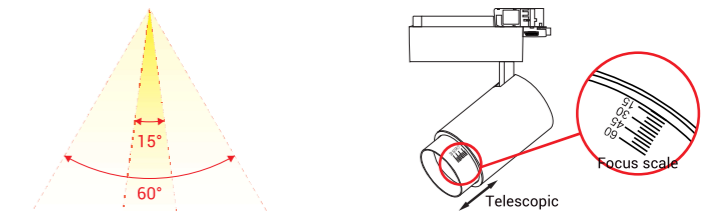

### Optional Accessories



Honeycomb

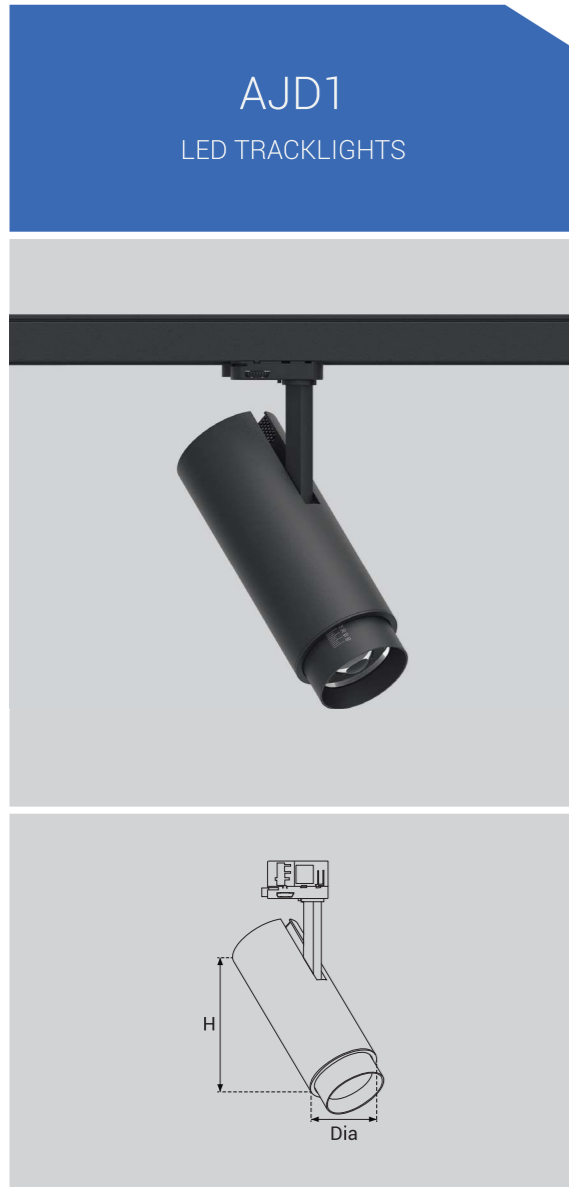




### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	Global/TCI/Tridonic
Connection	European standard 4-wire / 6-wire
Dimming	DALI/Zigbee/Casambi/Knob Dimming
Housing color	White/Black/Grey
Function	Zoomable
Lumens	100-110LM/W
CCT	3000K/4000K/5000K
Beam angle	Adjustable 6°~60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-20W-AJD3	20W	2162lm	Dia85*L190*H120~158mm
UPL-TR-30W-AJD3	30W	3256lm	Dia85*L190*H225~265mm


### Beam Angle Adjustable



### Features



Knob Dimming (Optional)



## AJD3 LED TRACKLIGHTS




### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CITIZEN COB LEDs
LED drivers	Global integrated driver
Connection	Global 4-wire / Tridonic 6-wire
Dimming	DALI/Zigbee/Casambi/Knob Dimming
Housing color	White/Black
Function	Shapeable & Zoomable
Lumens	100-110LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	Adjustable 15°~25°/20°~36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-15W-AJD5	15W	1592lm	Dia50*H168mm
UPL-TR-30W-AJD5	30W	3161lm	Dia80*H300mm


### Shapeable

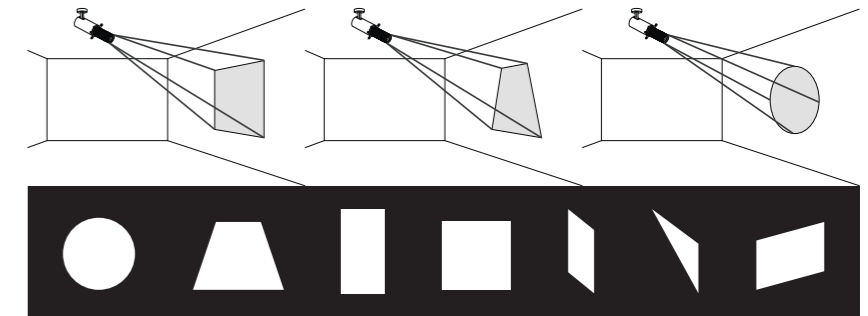

### Beam Angle Adjustable

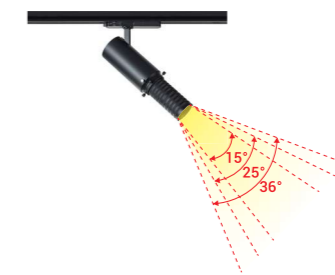

### Installation

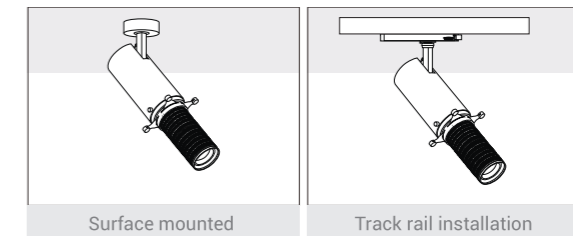

Surface mounted



Track rail installation

## AJD5 LED TRACKLIGHTS





## AJD6 & 7 & 8 LED TRACKLIGHTS

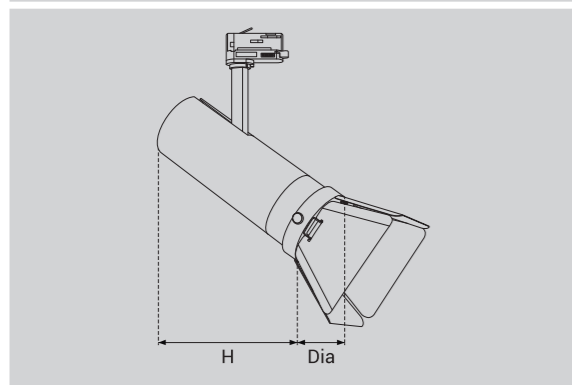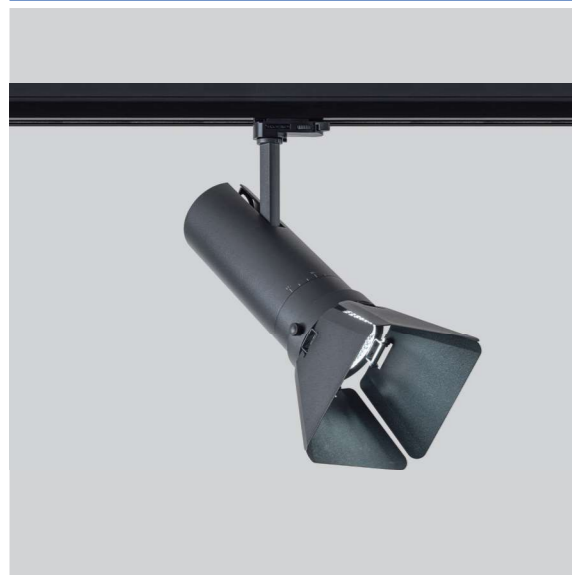

### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CITIZEN COB LEDs
LED drivers	Global/TCI/OSRAM/Tridonic
Connection	European standard 4-wire / 6-wire
Dimming	DALI/Triac/Tridonic/Knob Dimming
Housing color	White/Black/Grey
Function	Knob Dimming & CCT Adjustable 2800K-6000K
Lumens	100-110LM/W
CCT	2700K/3000K/3500K/4000K/5000K/Adjustable 2800K-6000K
Beam angle	Adjustable 15°~60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


### Model Selection

Model	Power	Lumens	Dimensions	Function
UPL-TR-30W-AJD6	30W	3161lm	Dia85*H225mm	/
UPL-TR-30W-AJD7	30W	3163lm	Dia85*H225mm	Knob Dimming
UPL-TR-30W-AJD8	30W	3161lm	Dia85*H225mm	Knob Dimming & CCT Adjustable 2800K-6000K

### Knob Dimming



### Beam Angle Adjustable



### Optional Accessories




Honeycomb




Louvre

### Installation





Surface mounted

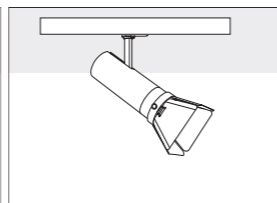

Track rail installation



## LOTUS LED TRACKLIGHTS

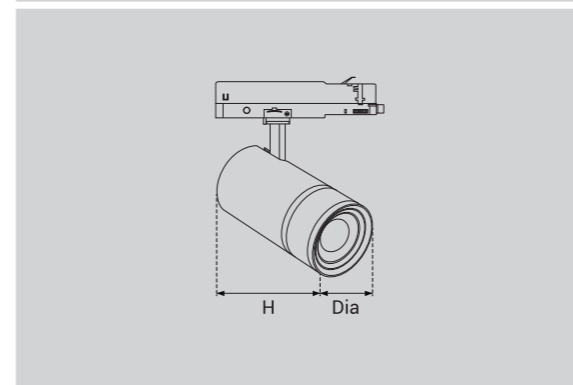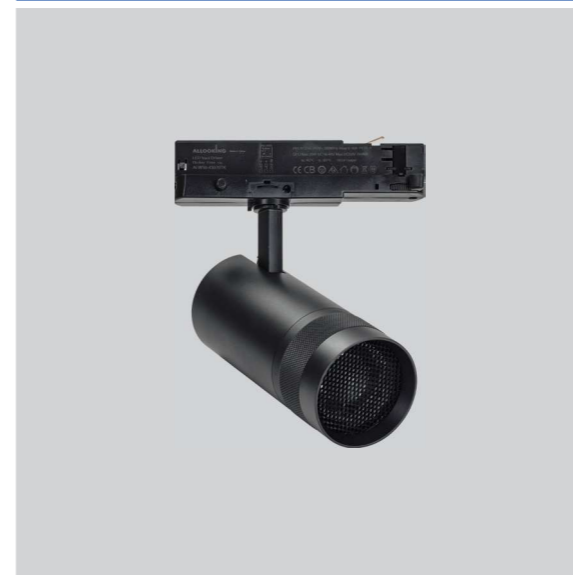


### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CITIZEN/PHILIPS COB LEDs
LED drivers	OSRAM/TCI (For non-dimming)
Connection	European standard 4 wire/6-wire for DALI dimming
Dimming	Knob/Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black
Function	Zoomable
Lumens	100-110LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	Adjustable 20°~60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-LOTUS-10W	10W	1048lm	Dia50*H160mm
UPL-LOTUS-15W	15W	1610lm	Dia62*H170mm
UPL-LOTUS-20W	20W	2156lm	Dia72*H172mm
UPL-LOTUS-25W	25W	2673lm	Dia80*H188mm
UPL-LOTUS-32W	32W	3403lm	Dia95*H190mm

### Beam Angle Adjustable



### Optional Accessories



Honeycomb



Louvre


### Features



Knob Dimming (Optional)




## LOTUS EXPO LED TRACKLIGHTS



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CITIZEN/PHILIPS COB LEDs
LED drivers	PHILIPS
Connection	2m cable with European Plug
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	Adjustable 20°~60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Beam Angle Adjustable



### Model Selection


Model	Power	Lumens	Dimensions
UPL-EXPO-10W-LOTUS	10W	1126lm	Dia50*H160mm
UPL-EXPO-15W-LOTUS	15W	1741lm	Dia62*H170mm
UPL-EXPO-20W-LOTUS	20W	2346lm	Dia72*H172mm
UPL-EXPO-25W-LOTUS	25W	2876lm	Dia80*H188mm
UPL-EXPO-32W-LOTUS	32W	3658lm	Dia95*H190mm

### Model Selection

Model	Power	Lumens	Dimensions
UPL-EXPO-2x10W-LOTUS	2x10W	2356lm	Dia50*H160mm
UPL-EXPO-2x15W-LOTUS	2x15W	3421lm	Dia62*H170mm
UPL-EXPO-2x20W-LOTUS	2x20W	4546lm	Dia72*H172mm
UPL-EXPO-2x25W-LOTUS	2x25W	5676lm	Dia80*H188mm
UPL-EXPO-2x32W-LOTUS	2x32W	7219lm	Dia95*H190mm



## MAGIC EXPO LED TRACKLIGHTS



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/PHILIPS COB LEDs
LED drivers	PHILIPS
Connection	2m cable with European Plug
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-EXPO-20W-MAGIC	20W	2346lm	Dia85*H104mm
UPL-EXPO-25W-MAGIC	25W	2875lm	Dia85xH104mm
UPL-EXPO-30W-MAGIC	30W	3428lm	Dia95*H112mm
UPL-EXPO-35W-MAGIC	35W	3979lm	Dia95*H112mm
UPL-EXPO-40W-MAGIC	40W	4516lm	Dia106*H123mm

### Model Selection

Model	Power	Lumens	Dimensions
UPL-EXPO-2x20W-MAGIC	2x20W	4526lm	Dia85*H104mm
UPL-EXPO-2x25W-MAGIC	2x25W	5755lm	Dia85xH104mm
UPL-EXPO-2x30W-MAGIC	2x30W	6818lm	Dia95*H112mm
UPL-EXPO-2x35W-MAGIC	2x35W	7916lm	Dia95*H112mm
UPL-EXPO-2x40W-MAGIC	2x40W	9024lm	Dia106*H123mm






**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	PHILIPS/CREE COB LEDs
LED drivers	OSRAM/TCl/TRIDONIC
Connection	European Standard 4-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-2x25W-MAGIC	2x25W	6253lm	Dia85*H104mm
UPL-TR-2x30W-MAGIC	2x30W	7415lm	Dia95*H112mm
UPL-TR-2x35W-MAGIC	2x35W	8611lm	Dia95*H112mm
UPL-TR-2x40W-MAGIC	2x40W	9776lm	Dia106*H123mm

**MAGIC**  
LED TRACKLIGHTS

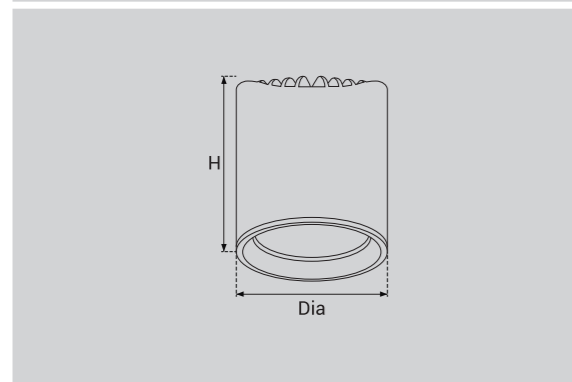

**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/PHILIPS/OSRAM COB LEDs
LED drivers	GLOBAL/TCl/PHILIPS/OSRAM
Connection	European standard 4 wire / 6-wire
Dimming	Knob/Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-20W-MAGIC-V2	20W	2318lm	Dia85*H104mm
UPL-TR-25W-MAGIC-V2	25W	2780lm	Dia85*H104mm
UPL-TR-30W-MAGIC-V2	30W	3388lm	Dia95*H112mm
UPL-TR-35W-MAGIC-V2	35W	3920lm	Dia95*H112mm
UPL-TR-40W-MAGIC-V2	40W	4496lm	Dia106*H123mm

**Optional Accessories**




Honeycomb



Louvre

**MAGIC**  
LED TRACKLIGHTS

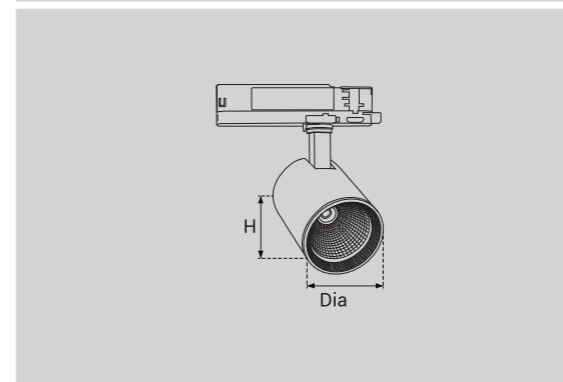



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/PHILIPS COB LEDs
LED drivers	PHILIPS/OSRAM/TCI
Connection	European Standard 4-wire / 6-wire
Dimming	Knob/Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-30W-MAGIC-V2	30W	3388lm	Dia90*H80mm
UPL-TR-35W-MAGIC-V2	35W	3920lm	Dia100*H85mm
UPL-TR-40W-MAGIC-V2	40W	4496lm	Dia110*H95mm

### Optional Accessories




Honeycomb

### Features



Knob Dimming (Optional)



## MAGIC V2

LED TRACKLIGHTS



### Technical Parameter



Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	TCI Non-Dimming
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Reflectors	Golden/Black/Silver
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/30°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-15W-S-53/140	15W	1689lm	Dia53*H140mm
UPL-TR-25W-S-73/160	25W	2822lm	Dia73*H160mm
UPL-TR-35W-S-90/180	35W	3975lm	Dia90*H180mm

## S

LED TRACKLIGHTS

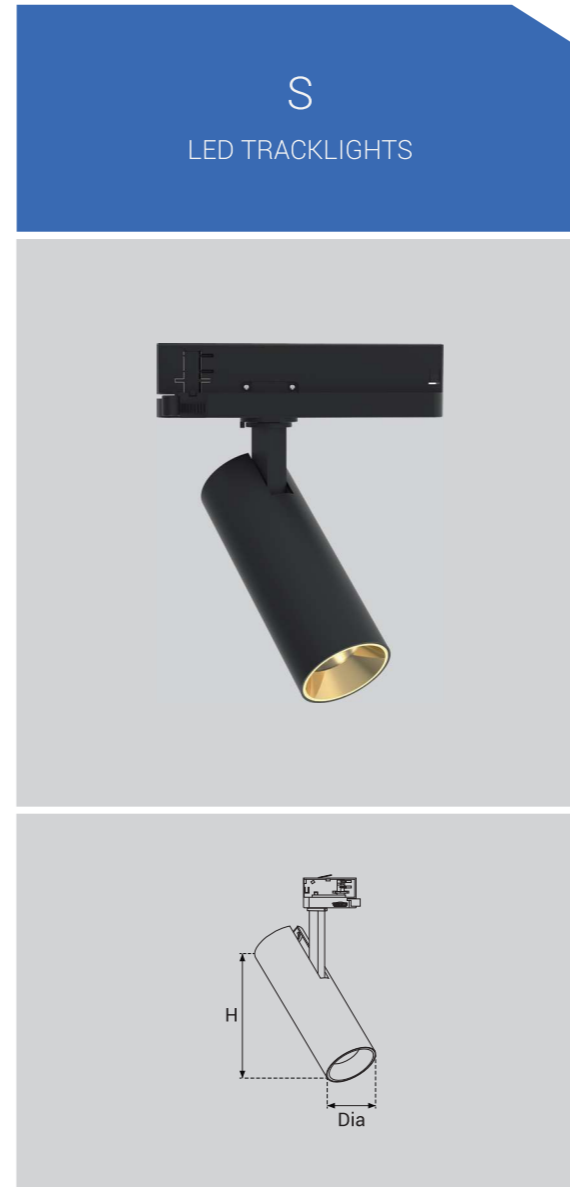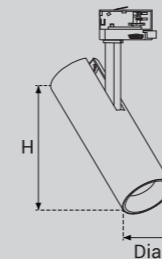



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	TCI Non-Dimming
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Reflectors	Golden/Black/Silver
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/30°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-25W-S-73/210	25W	2822lm	Dia73*H210mm
UPL-TR-35W-S-90/240	35W	3975lm	Dia90*H240mm

### Features



1-10V Dimming with a knob



S  
LED TRACKLIGHTS



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	OSRAM
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Grey/Blac
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/25°/40°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-15W-S-70/180	15W	1705lm	Dia70*H180mm
UPL-TR-20W-S-70/180	20W	2311lm	Dia70*H180mm
UPL-TR-25W-S-85/210	25W	2796lm	Dia85*H210mm
UPL-TR-30W-S-85/210	30W	3391lm	Dia85*H210mm
UPL-TR-40W-S-95/240	40W	4512lm	Dia95*H240mm
UPL-TR-50W-S-110/240	50W	5661lm	Dia110*H240mm


### Optional Accessories



Honeycomb



Louvre

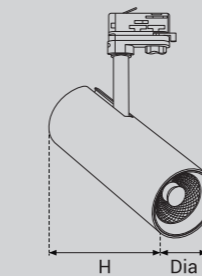

S  
LED TRACKLIGHTS





### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	TCI
Connection	European Standard 4-wire / 6-wire
Dimming	Knob/Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-20W-BELL	20W	2256lm	Dia88*H110mm
UPL-TR-30W-BELL	30W	3435lm	Dia100*H1130mm
UPL-TR-35W-BELL	35W	3993lm	Dia113*H150mm

### Features



Knob Dimming (Optional)



## BELL LED TRACKLIGHTS



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN COB LEDs
LED drivers	KG(Non-Dimming)-8W OSRAM/TCI (Non-Dimming)-15W/20W/25W/28W/32W
Connection	European Standard 4-wire
Dimming	Knob/Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/38°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


### Model Selection

Model	Power	Lumens	Dimensions
UPL-TULIP-8W	8W	916lm	Dia40*H120mm
UPL-TULIP-15W	15W	1695lm	Dia50*H140mm
UPL-TULIP-20W	20W	2253lm	Dia62*H153mm
UPL-TULIP-25W	25W	2829lm	Dia75*H158mm
UPL-TULIP-28W	28W	3162lm	Dia80*H158mm
UPL-TULIP-32W	32W	3597lm	Dia90*H158mm

### Features



Knob Dimming (Optional)



## TULIP LED TRACKLIGHTS





**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN COB LEDs
LED drivers	PHILIPS/OSRAM
Dimming	Triac/1-10V/DALI
Housing color	White/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/38°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


**Model Selection**

Model	Power	Lumens	Dimensions
UPL-LILAC-10W	10W	1162lm	Dia50*H150mm
UPL-LILAC-15W	15W	1726lm	Dia62*H171mm
UPL-LILAC-20W	20W	2295lm	Dia72*H172mm
UPL-LILAC-25W	25W	2853lm	Dia80*H188mm
UPL-LILAC-32W	32W	3626lm	Dia90*H190mm

**Optional Accessories**



Honeycomb



LILAC  
LED SPOTLIGHTS



**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN COB LEDs
LED drivers	PHILIPS/OSRAM
Dimming	Triac/1-10V/DALI/Zigbee
Housing color	White/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/24°/38°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


**Model Selection**

Model	Power	Lumens	Dimensions
UPL-ROSE-10W	10W	1162lm	Dia50*H150mm
UPL-ROSE-15W	15W	1726lm	Dia62*H171mm
UPL-ROSE-20W	20W	2295lm	Dia72*H172mm
UPL-ROSE-25W	25W	2853lm	Dia80*H188mm
UPL-ROSE-32W	32W	3626lm	Dia90*H190mm

**Optional Accessories**



Honeycomb




ROSE  
LED SPOTLIGHTS





## DRUM LED LAMP



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE COB LEDs
LED drivers	PHILIPS/TCI/OSRAM
Connection	Europea Standard 4-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	3000K/4000K/6000K/Dim-to-warm 1800K~3000K
Beam angle	36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection


Model	Power	Lumens	Dimensions
UPL-DL-24W-SM-190	24W	2773lm	Dia190*H178mm
UPL-DL-30W-SM-190	30W	3455lm	Dia190*H178mm
UPL-DL-40W-SM-190	40W	4568lm	Dia190*H178mm

Model	Power	Lumens	Dimensions
UPL-DL-24W-SS-190	24W	2773lm	Dia190*H178mm
UPL-DL-30W-SS-190	30W	3455lm	Dia190*H178mm
UPL-DL-40W-SS-190	40W	4568lm	Dia190*H178mm


Model	Power	Lumens	Dimensions
UPL-TR-24W-SS-190	24W	2773lm	Dia190*H178mm
UPL-TR-30W-SS-190	30W	3455lm	Dia190*H178mm
UPL-TR-40W-SS-190	40W	4568lm	Dia190*H178mm

Model	Power	Lumens	Dimensions
UPL-TR-24W-SM-190	24W	2773lm	Dia190*H178mm
UPL-TR-30W-SM-190	30W	3455lm	Dia190*H178mm
UPL-TR-40W-SM-190	40W	4568lm	Dia190*H178mm

### Installation

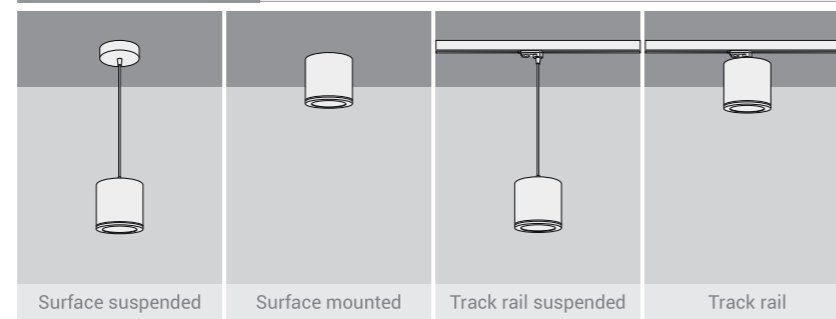

## V2 LED TRACKLIGHTS



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European standard track rail (4-wire for non-dimming & 6-wire for DALI)
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Black/Grey
Reflectors color	Golden/Black/White/Silver
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	20°/45°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-10W-SM-V2	10W	1155lm	Dia75*H100mm
UPL-TR-20W-SM-V2	20W	2311lm	Dia95*H152mm
UPL-TR-30W-SM-V2	30W	3386lm	Dia115*H152mm
UPL-TR-40W-SM-V2	40W	4491lm	Dia140*H162mm
UPL-TR-50W-SM-V2	50W	5612lm	Dia170*H182mm
UPL-TR-60W-SM-V2	60W	6721lm	Dia205*H212mm
UPL-TR-80W-SM-V2	80W	8923lm	Dia205*H212mm

GU10 LED TRACK LIGHTS  
**REPLACEABLE LIGHT SOURCE**



**Various Installation Methods**

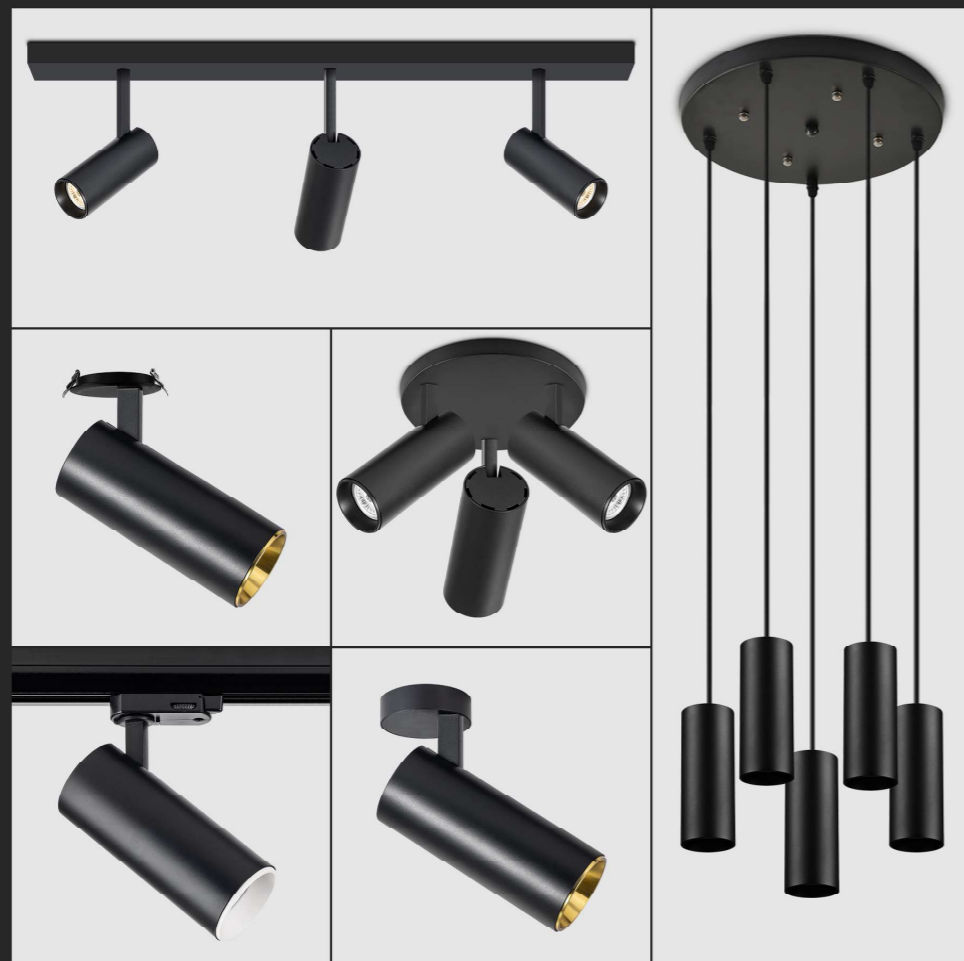

**Technical Parameter**

Model	UPL-TR-GU10-TULIP
Input voltage	AC230V 50HZ
Light source	Not included
Connection	European standard 4 wire
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights



**Technical Parameter**

Model	UPL-DL-GU10-TULIP
Input voltage	AC230V 50HZ
Light source	Not included
Installation	Recessed
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Hole cutting	Dia80mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights



**Technical Parameter**

Model	UPL-CL-GU10-TULIP
Input voltage	AC230V 50HZ
Light source	Not included
Installation	Surface mounted
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights



**Technical Parameter**


Model	UPL-CL-2GU10-TULIP
Input voltage	AC230V 50HZ
Light source	Not included
Installation	Surface mounted
Surface plate shape	Round
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights




Technical Parameter	
Model	UPL-CL-2GU10-TULIP
Input voltage	AC230V 50HZ
Light source	Not included
Installation	Surface mounted
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights



Technical Parameter	
Model	UPL-CL-3GU10-TULIP
Input voltage	AC230V 50HZ
Light source	Not included
Installation	Surface mounted
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights

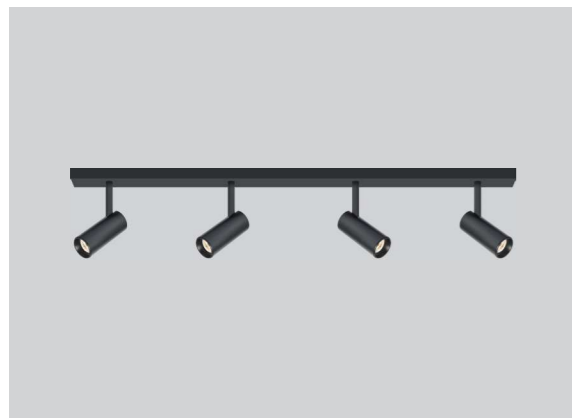

Technical Parameter	
Model	UPL-CL-4GU10-TULIP
Input voltage	AC230V 50HZ
Light source	Not included
Installation	Surface mounted
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights

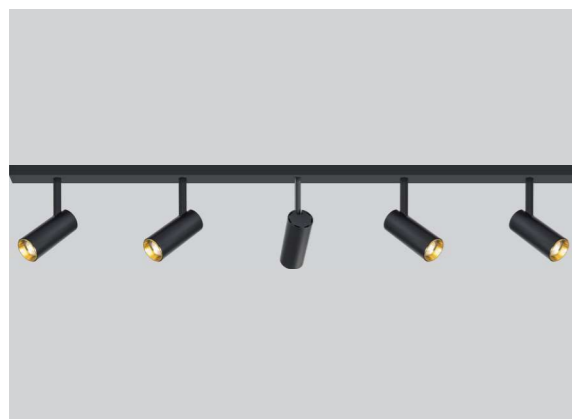

Technical Parameter	
Model	UPL-CL-5GU10-TULIP
Input voltage	AC230V 50HZ
Light source	Not included
Installation	Surface mounted
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights



Technical Parameter	
Model	UPL-TR-GU10-TULIP-P
Input voltage	AC230V 50HZ
Light source	Not included
Connection	European standard 4 wire
Cable length	2m
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights




Technical Parameter	
Model	UPL-TR-GU10-TULIP-P
Input voltage	AC230V 50HZ
Light source	Not included
Connection	European standard 4 wire
Cable length	2m
Housing color	White/Black
Front ring	Black/White/Golden
Dimension	Dia62*H150mm
Material	Die-casting Aluminum
Life-span	50 000 hours
Remark	Fix on front ring, which can fit different height of GU10 spotlights





## MINI SURFACE LED LAMP



### Technical Parameter


Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN COB LEDs
LED drivers	PHILIPS
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/4000K
Beam angle	24°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-3W-FLORA	45W	5583lm	Dia27*H108mmmm



## CO LED TRACKLIGHTS



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN COB LEDs
LED drivers	OSRAM/TCl/TRIDONIC
Connection	European Standard 4-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth/Knob
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K Dim-to-warm 1800K-3000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-10W-CO	10W	1153lm	Dia50*H120mm
UPL-TR-15W-CO	15W	1715lm	Dia60*H120mm
UPL-TR-20W-CO	20W	2481lm	Dia66*H130mm
UPL-TR-30W-CO	30W	3376lm	Dia78*H160mm

Model	Power	Lumens	Dimensions
UPL-TR-10W-CO-Dim-to-warm	10W	953lm	Dia50*H120mm
UPL-TR-15W-CO-Dim-to-warm	15W	1415lm	Dia60*H120mm
UPL-TR-20W-CO-Dim-to-warm	20W	1921lm	Dia66*H130mm
UPL-TR-30W-CO-Dim-to-warm	30W	2876lm	Dia78*H160mm

### Features



Knob Dimming (Optional)



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN COB LEDs
LED drivers	GLOBAL
Connection	European Standard 4-wire
Dimming	Triac/Casambi/Bluetooth/Knob
Housing color	White/Black
Lumens	110-120LM/W
CCT	3000K/4000K/6000K/Dim-to-warm 1800K~3000K
Beam angle	15°/24°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-10W-MARS	10W	1163lm	Dia110*H100mm
UPL-TR-10W-MARS-Dim-to-warm	10W	950lm	Dia110*H100mm

### Features



Knob Dimming (Optional)



## MARS LED TRACKLIGHTS




### Technical Parameter


Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/4000K/5000K
Beam angle	15°/25°/36°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-20W-EYE	20W	2256lm	Dia80*H95mm
UPL-TR-20W-EYE	30W	3329lm	Dia95*H110mm

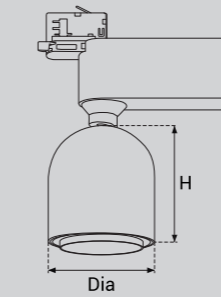

## EYE LED TRACKLIGHTS

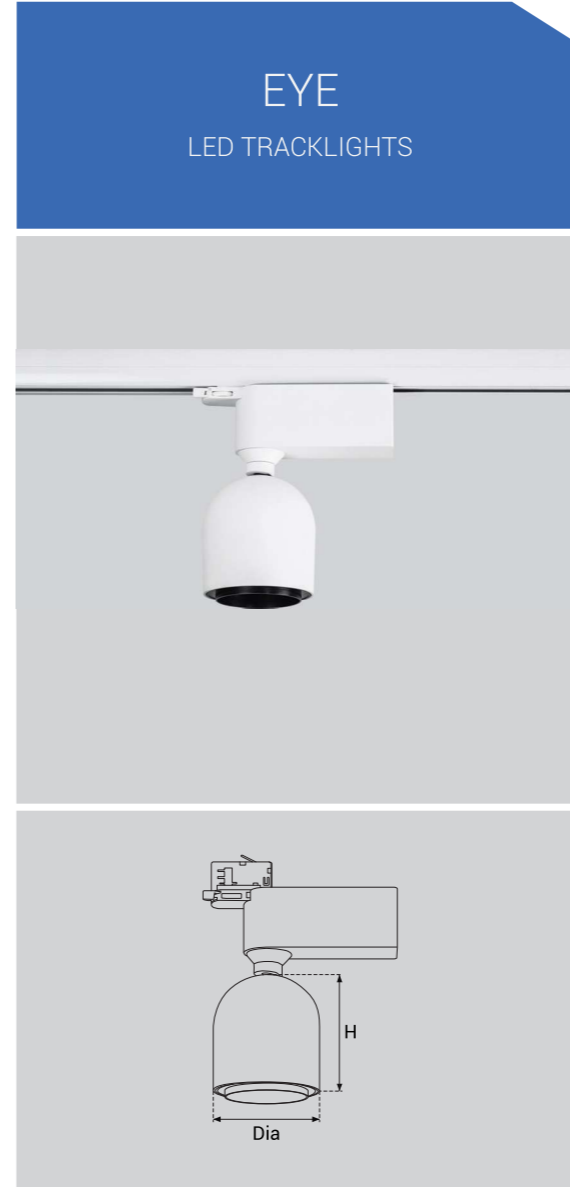



## SLIM PANEL LED TRACKLIGHTS



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	OSRAM/TRIDONIC
Dimming	1-10V/DALI
Connection	European Standard 4-wire / 6-wire
Housing color	White/Black/Grey
Lumens	120-130LM/W
CCT	3000K/4000K/5000K
Beam angle	30°/60°/90° single asymmetric Double asymmetric
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-Paneltrack-40W	40W	4952lm	L580*W190*H16*M77*N395mm
UPL-Paneltrack-60W	60W	7453lm	L580*W190*H16*M77*N395mm
UPL-Paneltrack-70W	70W	8589lm	L580*W190*H16*M77*N395mm



## SLIM PANEL LED TRACKLIGHTS




### Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	OSRAM/TRIDONIC
Connection	European Standard 4-wire / 6-wire
Housing color	White/Black/Grey
Function	Power adjustable & CCT adjustable
Lumens	120-130LM/W
CCT	3000K/4000K/5000K/Adjustable(2700K~6500K)
Beam angle	30°/60°/90° single asymmetric Double asymmetric
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-Paneltrack-50W~70W-ADJ	50W~70W	6159lm~8589lm	L580*W190*H16*M77*N395mm
UPL-Paneltrack-40W-CCT	40W	4952lm	L580*W190*H16*M77*N395mm
UPL-Paneltrack-50W-CCT	50W	6159lm	L580*W190*H16*M77*N395mm
UPL-Paneltrack-60W-CCT	60W	7453lm	L580*W190*H16*M77*N395mm
UPL-Paneltrack-70W-CCT	70W	8589lm	L580*W190*H16*M77*N395mm
UPL-Paneltrack-50W~70W-ADJ-CCT	50W~70W	6159lm~8589lm	L580*W190*H16*M77*N395mm

### Function

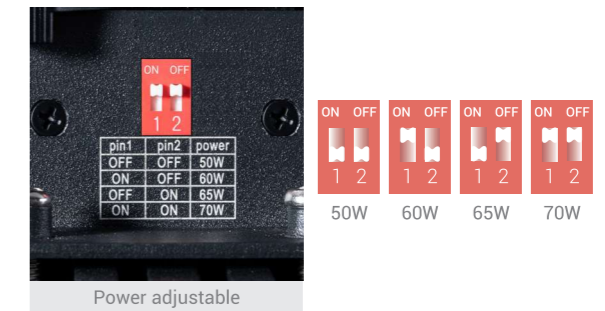

Power adjustable




CCT adjustable



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	PHILIPS/OSRAM
Dimming	Triac/1-10V/DALI
Housing color	White/Black
Lumens	120-130LM/W
CCT	3000K/4000K/5000K
Beam angle	120°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Installation

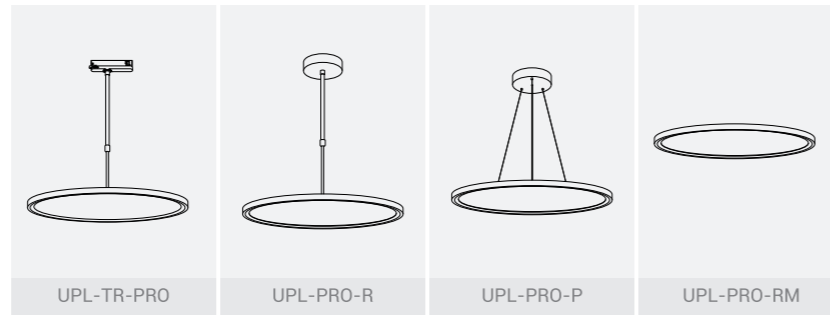

### Model Selection


Model	Power	Lumens	Dimensions
UPL-TR-35W-PRO	35W	4353lm	Dia500*H19mm
UPL-TR-40W-PRO	40W	4965lm	Dia600*H19mm

Model	Power	Lumens	Dimensions
UPL-30W-PRO-R	30W	3753lm	Dia400*H19mm
UPL-40W-PRO-R	40W	4961lm	Dia500*H19mm
UPL-48W-PRO-R	48W	5895lm	Dia600*H19mm

Model	Power	Lumens	Dimensions
UPL-40W-PRO-P	40W	4961lm	Dia500*H19mm
UPL-48W-PRO-P	48W	5895lm	Dia600*H19mm
UPL-60W-PRO-P	60W	7325lm	Dia780*H19mm

Model	Power	Lumens	Dimensions
UPL-30W-PRO-RM	30W	3752lm	Dia400*H19mm
UPL-40W-PRO-RM	40W	4965lm	Dia500*H19mm
UPL-48W-PRO-RM	48W	5890lm	Dia600*H19mm
UPL-60W-PRO-RM	60W	7325lm	Dia780*H19mm


## PRO PANEL LED LIGHTS



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	PHILIPS/OSRAM
Dimming	Triac/1-10V/DALI
Housing color	White/Black
Lumens	120-130LM/W
CCT	3000K/4000K/5000K
Beam angle	120°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Installation

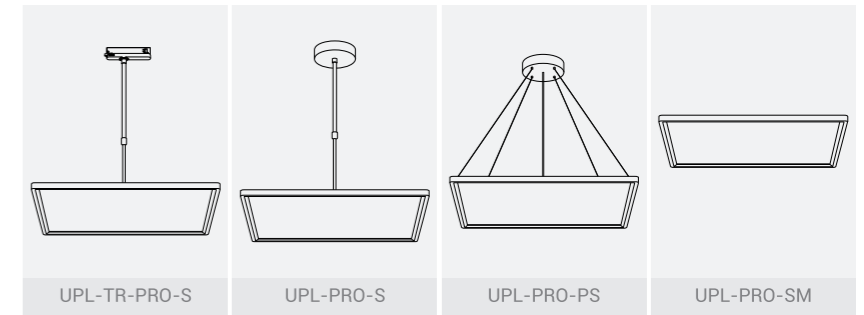

### Model Selection



Model	Power	Lumens	Dimensions
UPL-TR-35W-PRO-S	35W	4353lm	L500*W500*H19 mm
UPL-TR-40W-PRO-S	40W	4965lm	L600*W600*H19 mm

Model	Power	Lumens	Dimensions
UPL-30W-PRO-S	30W	3753lm	L400*W400*H19mm
UPL-40W-PRO-S	40W	4961lm	L500*W500*H19mm
UPL-48W-PRO-S	48W	5895lm	L600*W600*H19mm

Model	Power	Lumens	Dimensions
UPL-40W-PRO-PS	40W	4961lm	L500*W500*H19mm
UPL-48W-PRO-PS	48W	5895lm	L600*W600*H19mm
UPL-60W-PRO-PS	60W	7325lm	L780*W780*H19mm

Model	Power	Lumens	Dimensions
UPL-30W-PRO-SM	30W	3752lm	L400*W400*H19mm
UPL-40W-PRO-SM	40W	4965lm	L500*W500*H19mm
UPL-48W-PRO-SM	48W	5890lm	L600*W600*H19mm
UPL-60W-PRO-SM	60W	7325lm	L780*W780*H19mm

## PRO PANEL LED LIGHTS

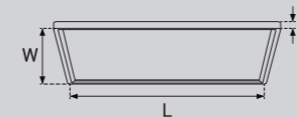




**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/20°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-25W-N1	25W	2759lm	Dia110*H143mm
UPL-TR-35W-N1	35W	3942lm	Dia110*H143mm

**N1**  
LED TRACKLIGHTS

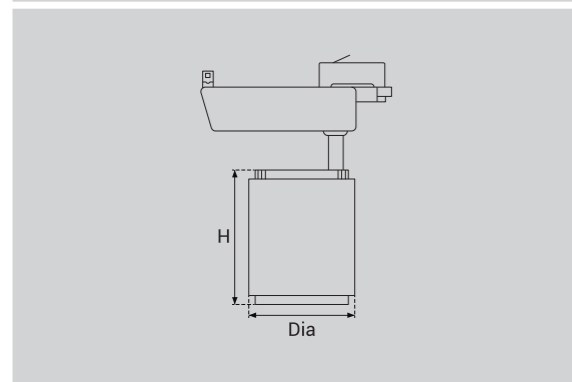


**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/20°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-25W-N2	25W	2759lm	Dia96*H136mm
UPL-TR-35W-N2	35W	3942lm	Dia96*H136mm

**N2**  
LED TRACKLIGHTS

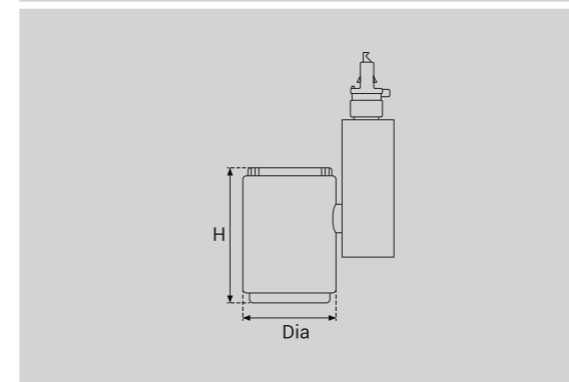



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/20°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-15W-N3	15W	1719lm	Dia85*H98 mm
UPL-TR-20W-N3	20W	2256lm	Dia85*H98 mm
UPL-TR-25W-N3	25W	2759lm	Dia85*H98 mm
UPL-TR-35W-N3	35W	3942lm	Dia96*H116mm
UPL-TR-45W-N3	45W	5053lm	Dia106*H112mm
UPL-TR-50W-N3	50W	5597lm	Dia106*H115mm

### Optional Accessories



Louvre



## N3 LED TRACKLIGHTS




### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-20W-N5	20W	2256lm	Dia85*H104mm
UPL-TR-25W-N5	25W	2759lm	Dia85*H104mm
UPL-TR-30W-N5	30W	3376lm	Dia95*H114mm
UPL-TR-35W-N5	35W	3942lm	Dia95*H114mm

## N5 LED TRACKLIGHTS






**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-20W-N6	20W	2256lm	Dia85*H104mm
UPL-TR-25W-N6	25W	2759lm	Dia85*H104mm
UPL-TR-30W-N6	30W	3376lm	Dia95*H114mm
UPL-TR-35W-N6	35W	3942lm	Dia95*H114mm

**N6**  
LED TRACKLIGHTS

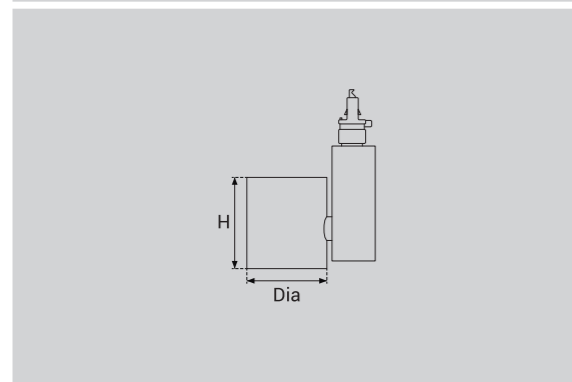


**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**


Model	Power	Lumens	Dimensions
UPL-25W-Railspots1	25W	2755lm	Dia115*H129mm
UPL-30W-Railspots1	30W	3381lm	Dia115*H129mm
UPL-35W-Railspots1	35W	3946lm	Dia115*H129mm

**RAILSPOTS**  
LED TRACKLIGHTS

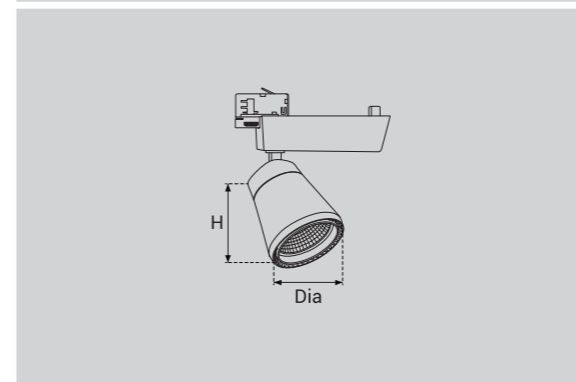



## RAILSPOTS LED TRACKLIGHTS



### Technical Parameter


Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-25W-Railspots2	25W	2755lm	Dia115*H129mm
UPL-30W-Railspots2	30W	3381lm	Dia115*H129mm
UPL-35W-Railspots2	35W	3946lm	Dia115*H129mm



## RAILSPOTS LED TRACKLIGHTS



### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-25W-Railspots3	25W	2755lm	Dia115*H129mm
UPL-30W-Railspots3	30W	3381lm	Dia115*H129mm
UPL-35W-Railspots3	35W	3946lm	Dia115*H129mm






**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European standard 4 wire / 6-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-30W-R1	30W	3453lm	Dia106*H122mm
UPL-TR-35W-R1	35W	3965lm	Dia106*H122mm
UPL-TR-40W-R1	40W	4513lm	Dia106*H122mm

**R1**  
LED TRACKLIGHTS

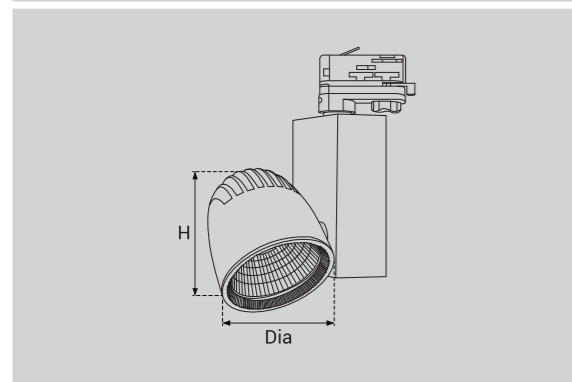



**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European standard 4 wire / 6-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-30W-R2	30W	3453lm	Dia106*H122mm
UPL-TR-35W-R2	35W	3965lm	Dia106*H122mm
UPL-TR-40W-R2	40W	4513lm	Dia106*H122mm

**R2**  
LED TRACKLIGHTS

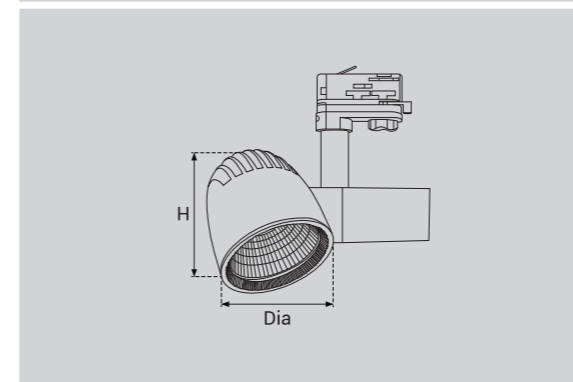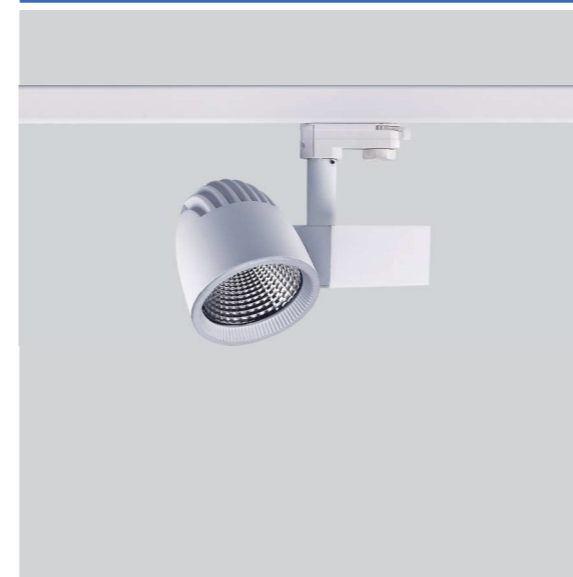




**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European standard 4 wire / 6-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-30W-R3	30W	3453lm	Dia106*H122mm
UPL-TR-35W-R3	35W	3965lm	Dia106*H122mm
UPL-TR-40W-R3	40W	4513lm	Dia106*H122mm

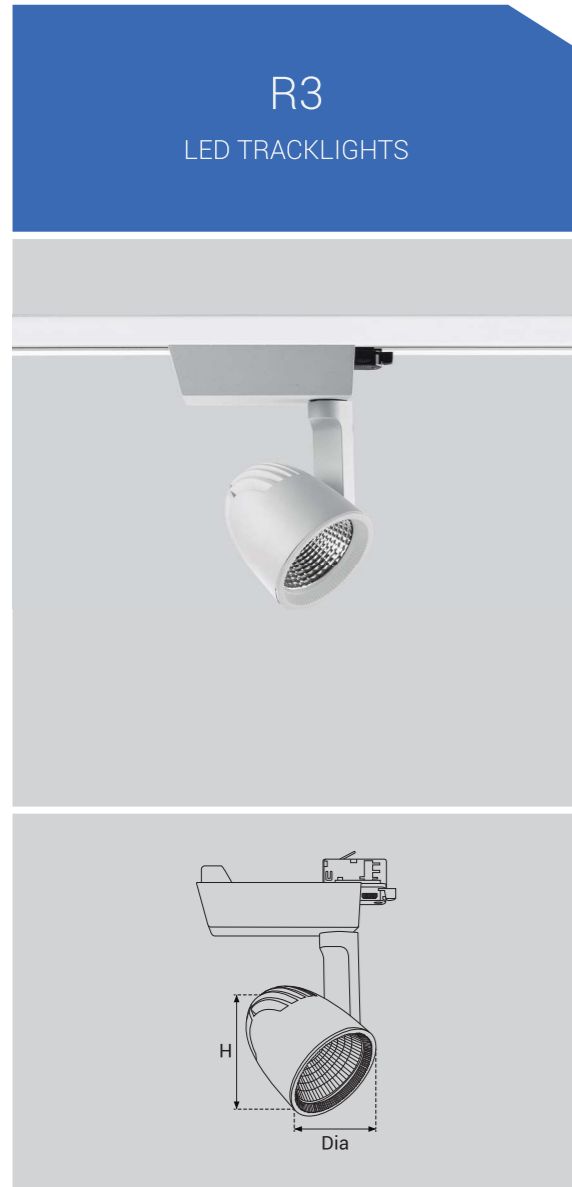

**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European standard 4 wire / 6-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-30W-R4	30W	3453lm	Dia106*H122mm
UPL-TR-35W-R4	35W	3965lm	Dia106*H122mm
UPL-TR-40W-R4	40W	4513lm	Dia106*H122mm






**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire/ 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-35W-COB3	35W	3942lm	Dia100*H106*P128mm
UPL-TR-45W-COB3	45W	5012lm	Dia122*H128*P128mm

**COB3**  
LED TRACKLIGHTS

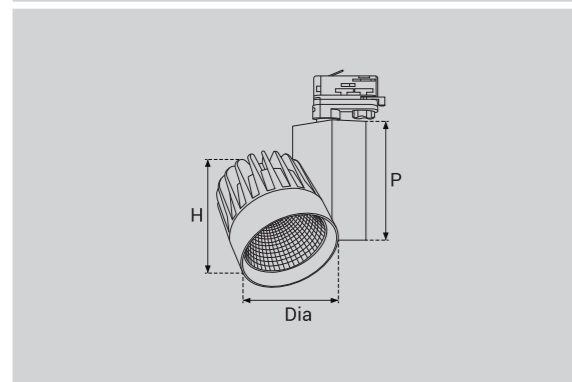



**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM/TRIDONIC
Connection	European Standard 4-wire/ 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-55W-COB4	55W	6162lm	Dia135*H135*D150mm

**COB4**  
LED TRACKLIGHTS

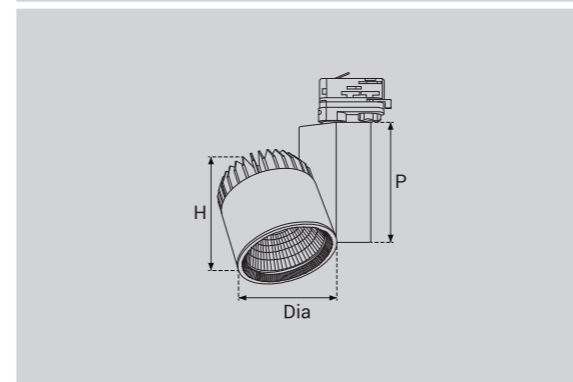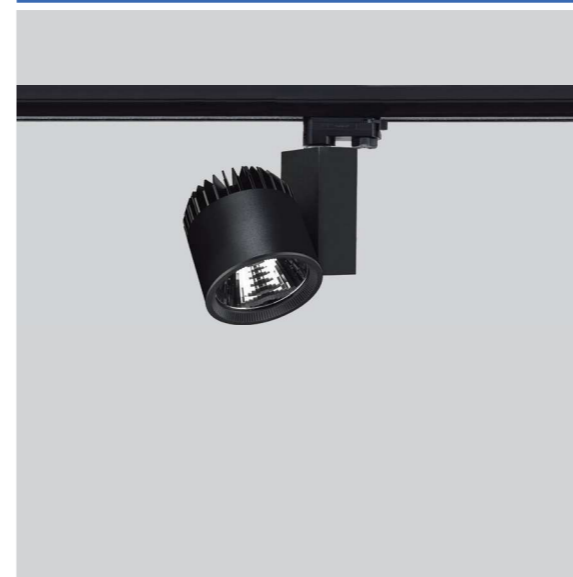




## RECTANGULAR COB LED TRACKLIGHTS

### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	OSRAM
Connection	European Standard 4-wire/ 6-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-20W-RT-COB	20W	2315lm	L136*W94*H152mm
UPL-TR-30W-RT-COB	30W	3381lm	L136*W94*H152mm
UPL-TR-40W-RT-COB	40W	4526lm	L180*W115*H164mm
UPL-TR-45W-RT-COB	45W	5376lm	L180*W115*H164mm

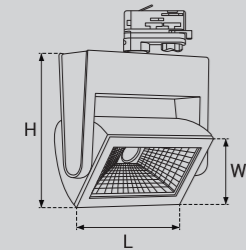


## RECTANGULAR SMD LED TRACKLIGHTS

### Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	LIFUD
Connection	European Standard 4-wire/ 6-wire
Dimming	Triac/1-10V/DALI
Housing color	White/Black/Grey
Lumens	120-130LM/W
CCT	2700K/3000K/4000K/5000K/5700K/6000K
Beam angle	120°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-20W-RT-SMD	20W	2515lm	L185*W75*H204mm
UPL-TR-30W-RT-SMD	30W	3721lm	L185*W75*H204mm
UPL-TR-40W-RT-SMD	40W	4926lm	L185*W75*H204mm
UPL-TR-50W-RT-SMD	50W	6106lm	L185*W75*H204mm

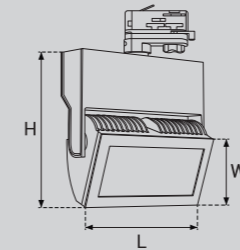




### Technical Parameter

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	PHILIPS/OSRAM
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Bluetooth/Casambi
Housing color	White/Black/Grey
Lumens	110-120LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/45°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours



### Model Selection

Model	Power	Lumens	Dimensions
UPL-Tracklights-30W	30W	3453lm	Dia115*H104*P48mm
UPL-Tracklights-35W	35W	3965lm	Dia115*H104*P48mm
UPL-Tracklights-40W	40W	4513lm	Dia115*H104*P48mm

## NEW LED TRACKLIGHTS

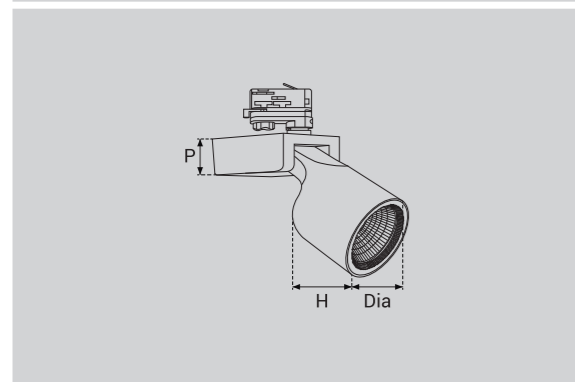

## AC LED TRACKLIGHTS

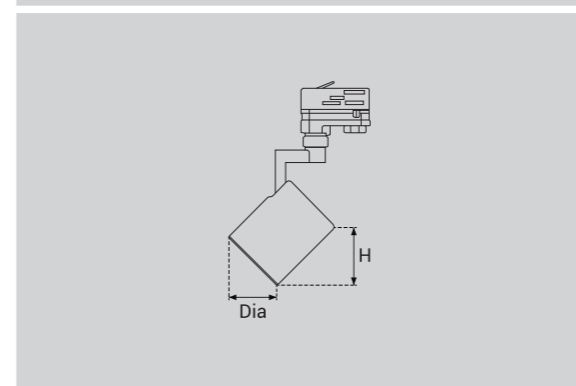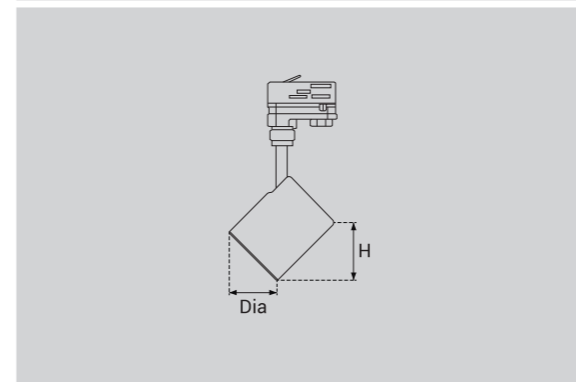

### Technical Parameter

Input voltage	AC230V 50HZ
Light source	LUMENS LEDs
LED drivers	PHILIPS
Connection	European Standard 4-wire / 6-wire
Dimming	Triac
Housing color	White/Grey/Black
Lumens	110-120LM/W
CCT	3000K/4000K
Beam angle	20°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-20W-AC	20W	2253lm	Dia85*H104mm
UPL-TR-30W-AC	30W	3395lm	Dia95*H112mm
UPL-TR-40W-AC	40W	4513lm	Dia106*H123mm

### Optional Accessories



Honeycomb



Louvre


**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	CREE/CITIZEN/PHILIPS/TRIDONIC COB LEDs
LED drivers	OSRAM
Connection	European Standard 4-wire / 6-wire
Dimming	Triac/1-10V/DALI/Casambi/Bluetooth
Housing color	White/Grey/Black
Lumens	100-110LM/W
CCT	2700K/3000K/3500K/4000K/5000K
Beam angle	15°/30°/40°/60°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-25W-U	25W	2576lm	Dia105*H140mm
UPL-TR-30W-U	30W	3135lm	Dia105*H140mm
UPL-TR-35W-U	35W	3693lm	Dia115*H160mm
UPL-TR-40W-U	40W	4209lm	Dia115*H160mm
UPL-TR-45W-U	45W	4742lm	Dia128*H170mm

U  
LED TRACKLIGHTS



ADJ LINEAR  
LED TRACKLIGHTS

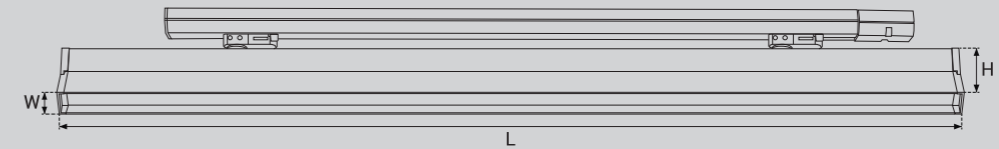

**Technical Parameter**

Input voltage	AC230V 50HZ
Light source	OSRAM SMD LEDs
LED drivers	PHILIPS/OSRAM
Connection	European Standard 4-wire/ 6-wire
Dimming	DALI
Housing color	White/Grey/Black
Lumens	120-130LM/W
CCT	3000K/4000K/6000K
Beam angle	Asymmetric 25°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

**Model Selection**

Model	Power	Lumens	Dimensions
UPL-TR-50W-120- ADJ	50W	6213lm	L1200*W40*H90mm


**Features**



Rotatable 30°

## MAGIC LINEAR

LED TRACKLIGHTS

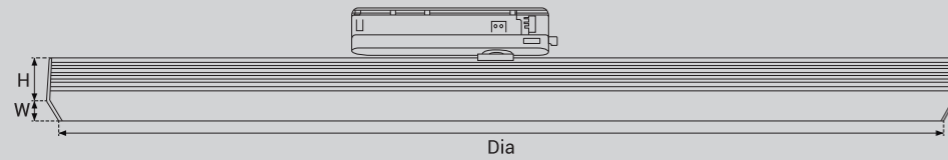

### Technical Parameter



Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	PHILIPS/TCI
Connection	European Standard 4-wire/ 6-wire
Dimming	Triac/1-10V/DALI
Housing color	White/Grey/Black
Lumens	120-130LM/W
CCT	3000K/4000K/6000K
Beam angle	100°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-LN-100-MAGIC-30W	30W	3752lm	L1000*W35*H32.5mm
UPL-TR-LN-100-MAGIC-40W	40W	4963lm	L1000*W35*H32.5mm
UPL-TR-LN-120-MAGIC-30W	30W	3752lm	L1200*W35*H32.5mm
UPL-TR-LN-120-MAGIC-40W	40W	4963lm	L1200*W35*H32.5mm

## SKYLINE

LED TRACKLIGHTS

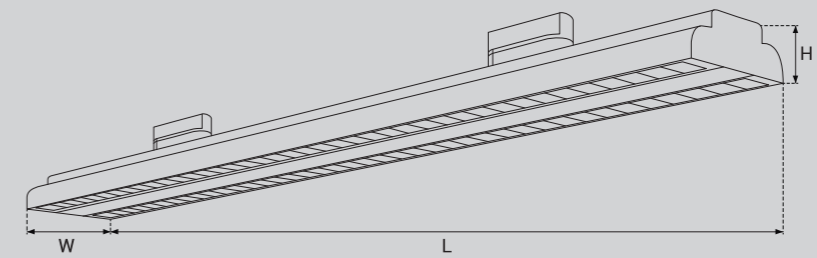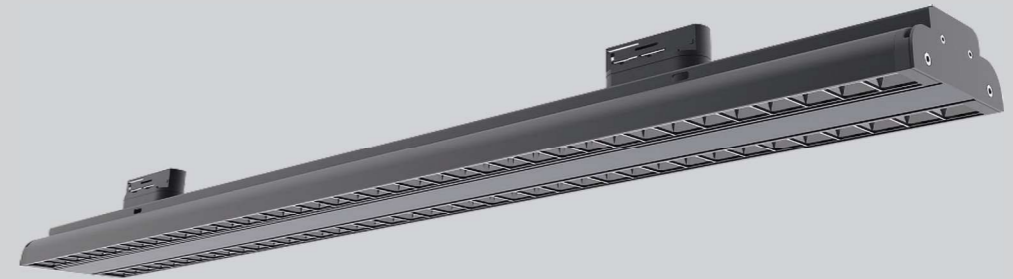

### Technical Parameter

Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	OSRAM
Connection	European Standard 4-wire
Dimming	DALI
Housing color	White/Grey/Black
Function	Adjustable and Linkable
Installation	Suspended/Surface mounted
Lumens	120-130LM/W
CCT	3000K/4000K/6000K
Beam angle	30°
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours


### Model Selection

Model	Power	Lumens	Dimensions
UPL-TR-40W-SKYLINE	40W	4952lm	L600*W75*H50mm
UPL-TR-50W-SKYLINE	50W	6253lm	L600*W75*H50mm
UPL-TR-60W-SKYLINE	60W	7412lm	L600*W75*H50mm

Model	Power	Lumens	Dimensions
UPL-LN-40W-SKYLINE	40W	4952lm	L600*W75*H50mm
UPL-LN-50W-SKYLINE	50W	6253lm	L600*W75*H50mm
UPL-LN-60W-SKYLINE	60W	7412lm	L600*W75*H50mm


## V1 LINEAR LED TRACKLIGHTS

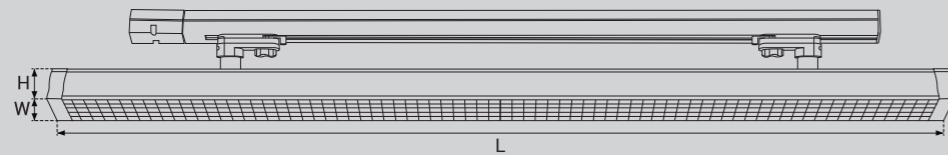

Technical Parameter	
Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	PHILIPS/TCI
Connection	European Standard 4-wire/ 6-wire
Dimming	DALI
Housing color	White/Grey/Black
Lumens	120-130LM/W
CCT	3000K/4000K/6000K
Beam angle	30°/60°/90° Single Asymmetric Double Asymmetric
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection				
Model	Power	Lumens	Dimensions	
UPL-TR-30W-60-LENS-V1	30W	3683lm	L600*W75*H50mm	
UPL-TR-40W-90-LENS-V1	40W	4955lm	L900*W75*H50mm	
UPL-TR-60W-120-LENS-V1	60W	7413lm	L1200*W75*H50mm	
UPL-TR-80W-150-LENS-V1	80W	9855lm	L1500*W75*H50mm	

## V2 LINEAR LED TRACKLIGHTS

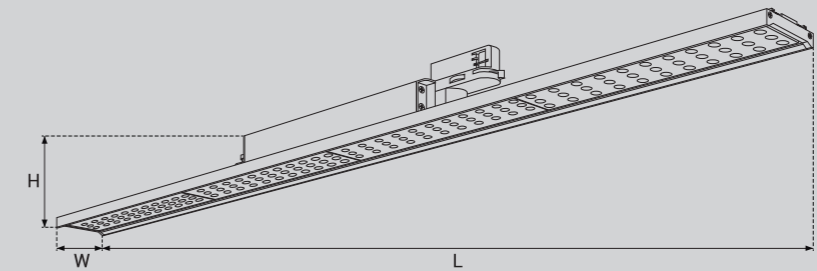

Technical Parameter	
Input voltage	AC230V 50HZ
Light source	SAMSUNG SMD LEDs
LED drivers	OSRAM
Connection	European Standard 4-wire
Dimming	DALI
Housing color	White/Grey/Black
Lumens	120-130LM/W
CCT	3000K/4000K/6000K
Beam angle	30°/60°/90° Single Asymmetric Double Asymmetric
Color rendering index	CRI≥80/90 (CRI97 is available)
Material	Die-casting Aluminum
Life-span	50 000 hours

Model Selection				
Model	Power	Lumens	Dimensions	
UPL-TR-30W-60-LENS-V2	30W	3683lm	L600*W75*H50mm	
UPL-TR-40W-90-LENS-V2	40W	4955lm	L900*W75*H50mm	
UPL-TR-40W-120-LENS-V2	40W	4955lm	L120*W75*H50mm	
UPL-TR-60W-120-LENS-V2	60W	7413lm	L1200*W75*H50mm	
UPL-TR-80W-150-LENS-V2	80W	9855lm	L1500*W75*H50mm	